



<<< Fold Here >>>


Comments



Thank You for using Gemini Wireline LLC
785-625-1182







Database File	sosara#1oh.db
Dataset Pathname	pass6
Presentation Format	kdillinn
Dataset Creation	Thu Sep 14 13:17:44 2023
Charted by	Depth in Feet scaled 1:600



0	GR (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	10000	LTEN (lb)	0
			0	RILD (Ohm-m)	50
			0	RLL3 (Ohm-m)	50
			50	RILD x 10 (Ohm-m)	500
			50	RLL3 x 10 (Ohm-m)	500


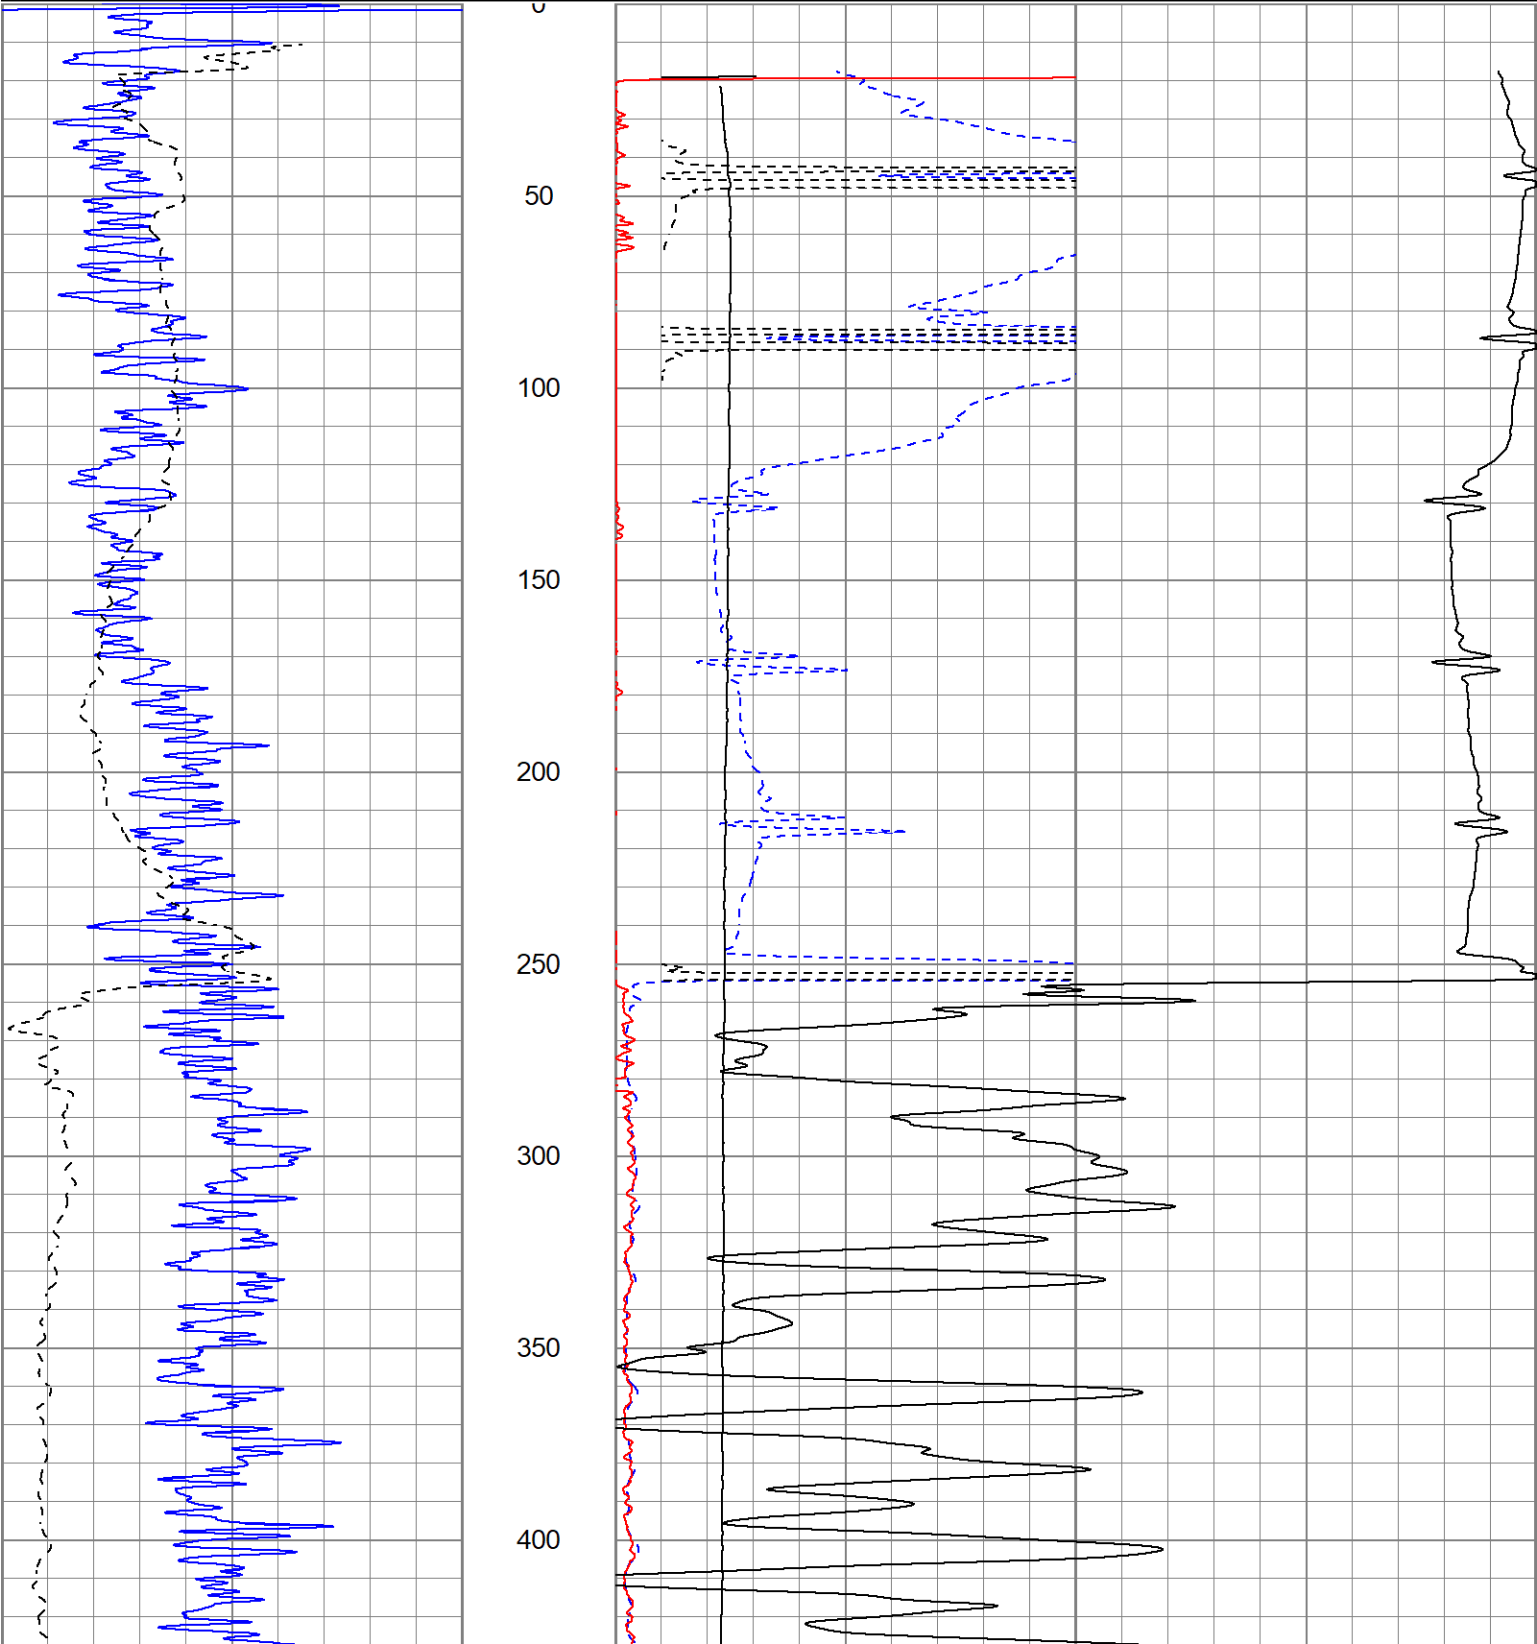


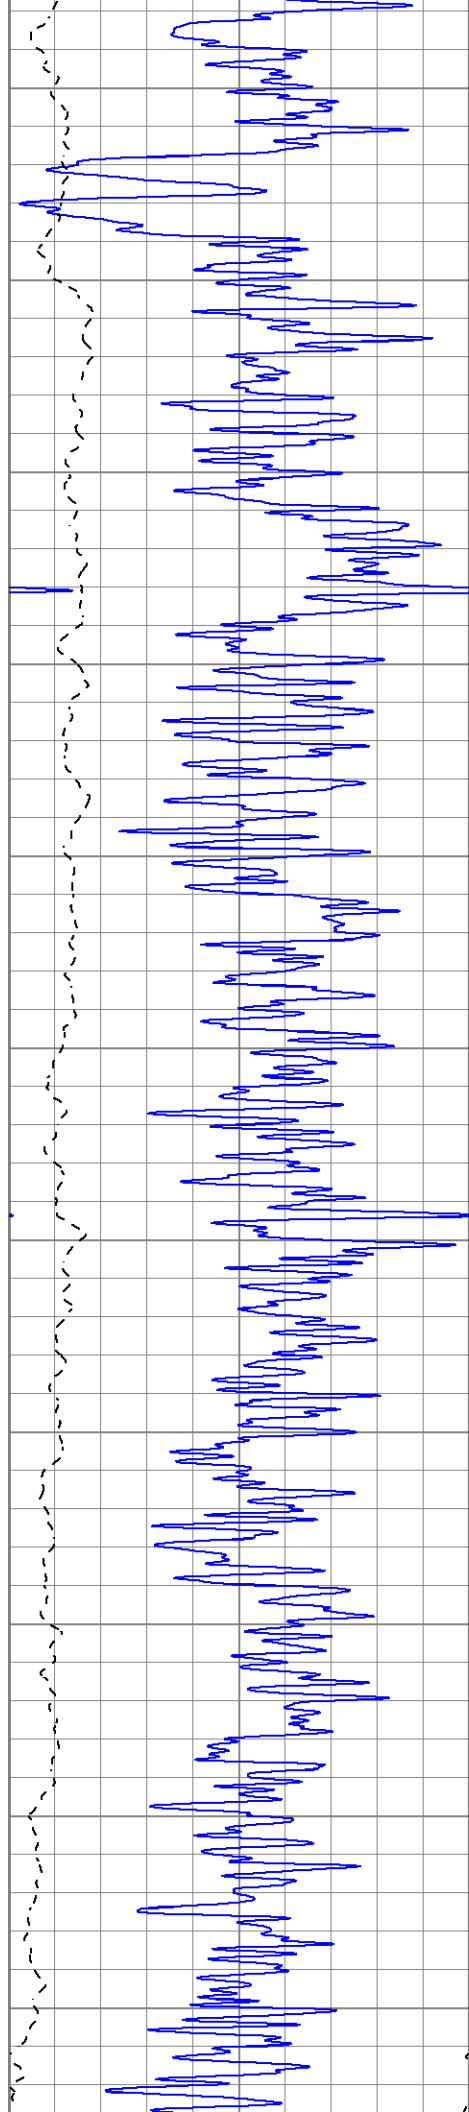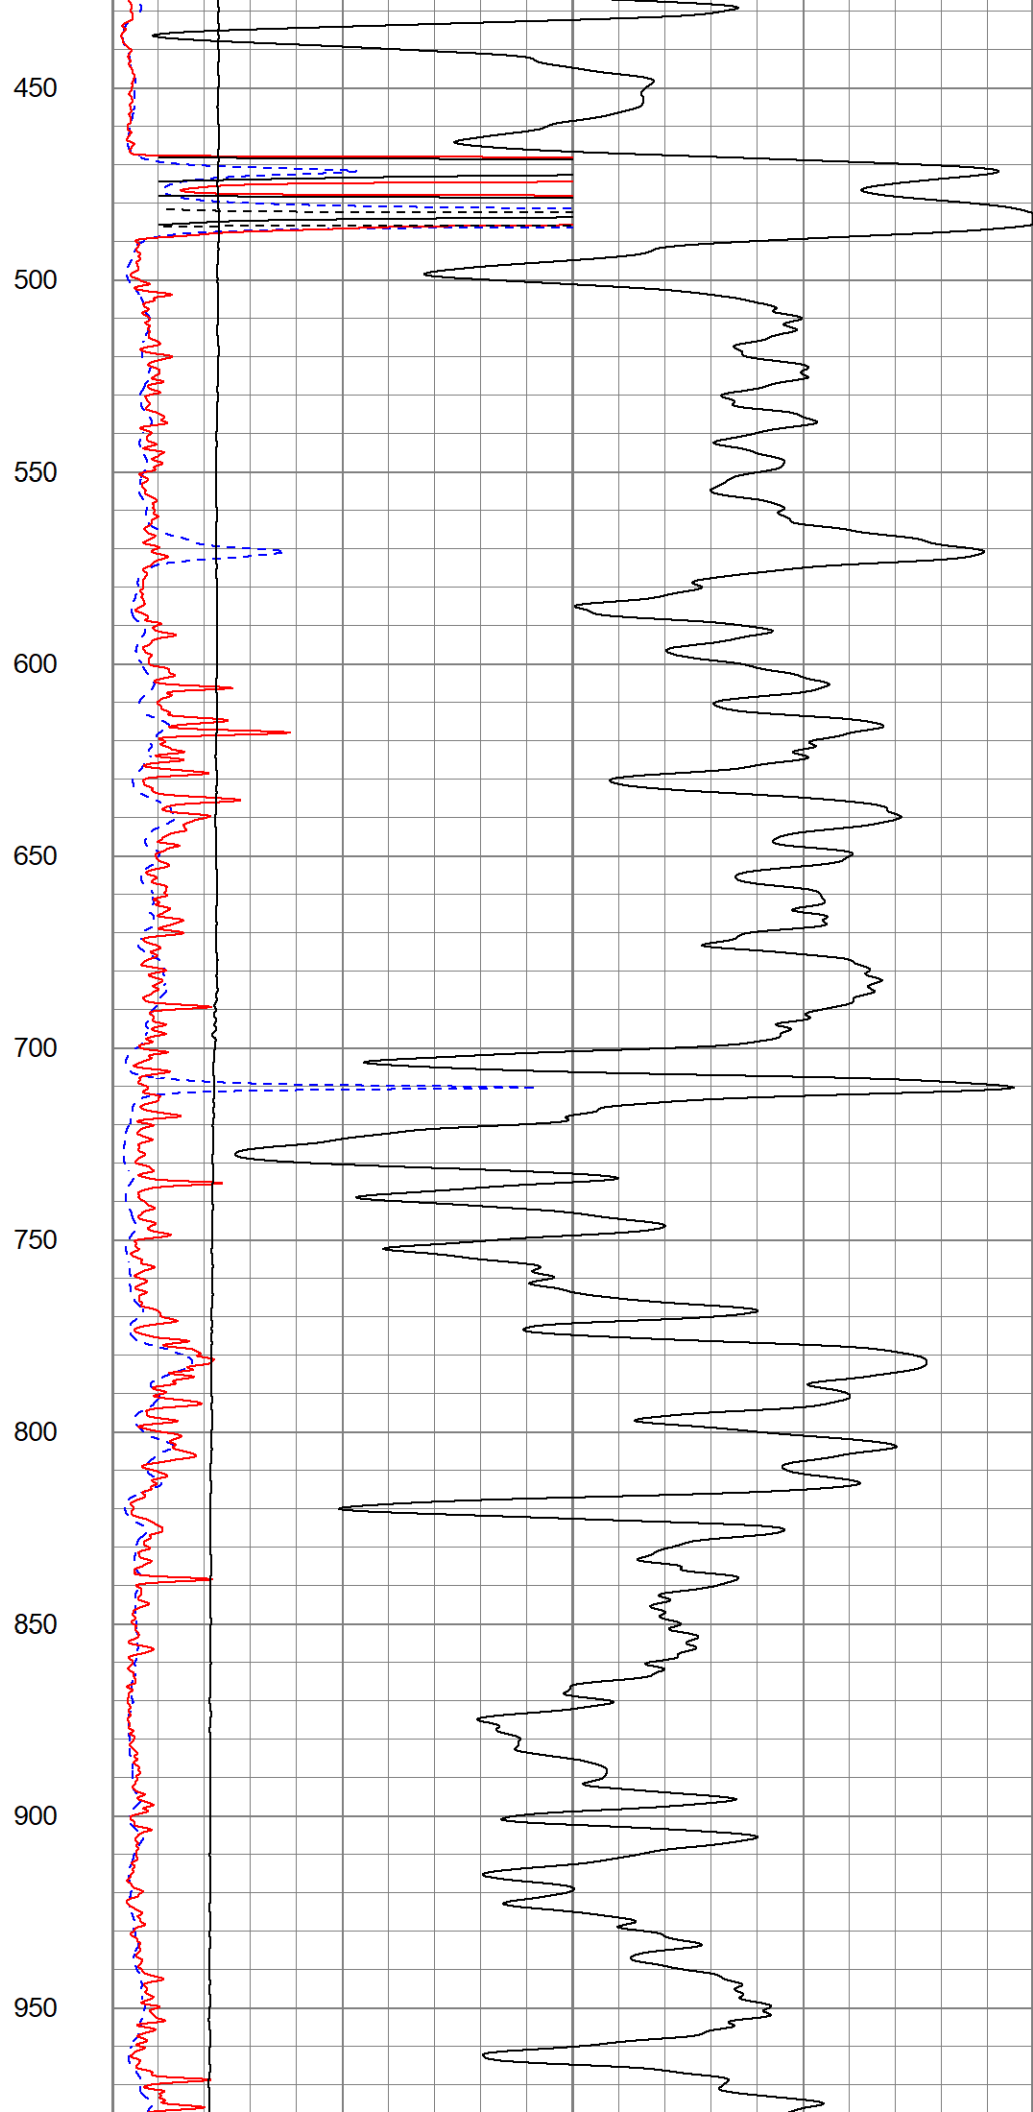


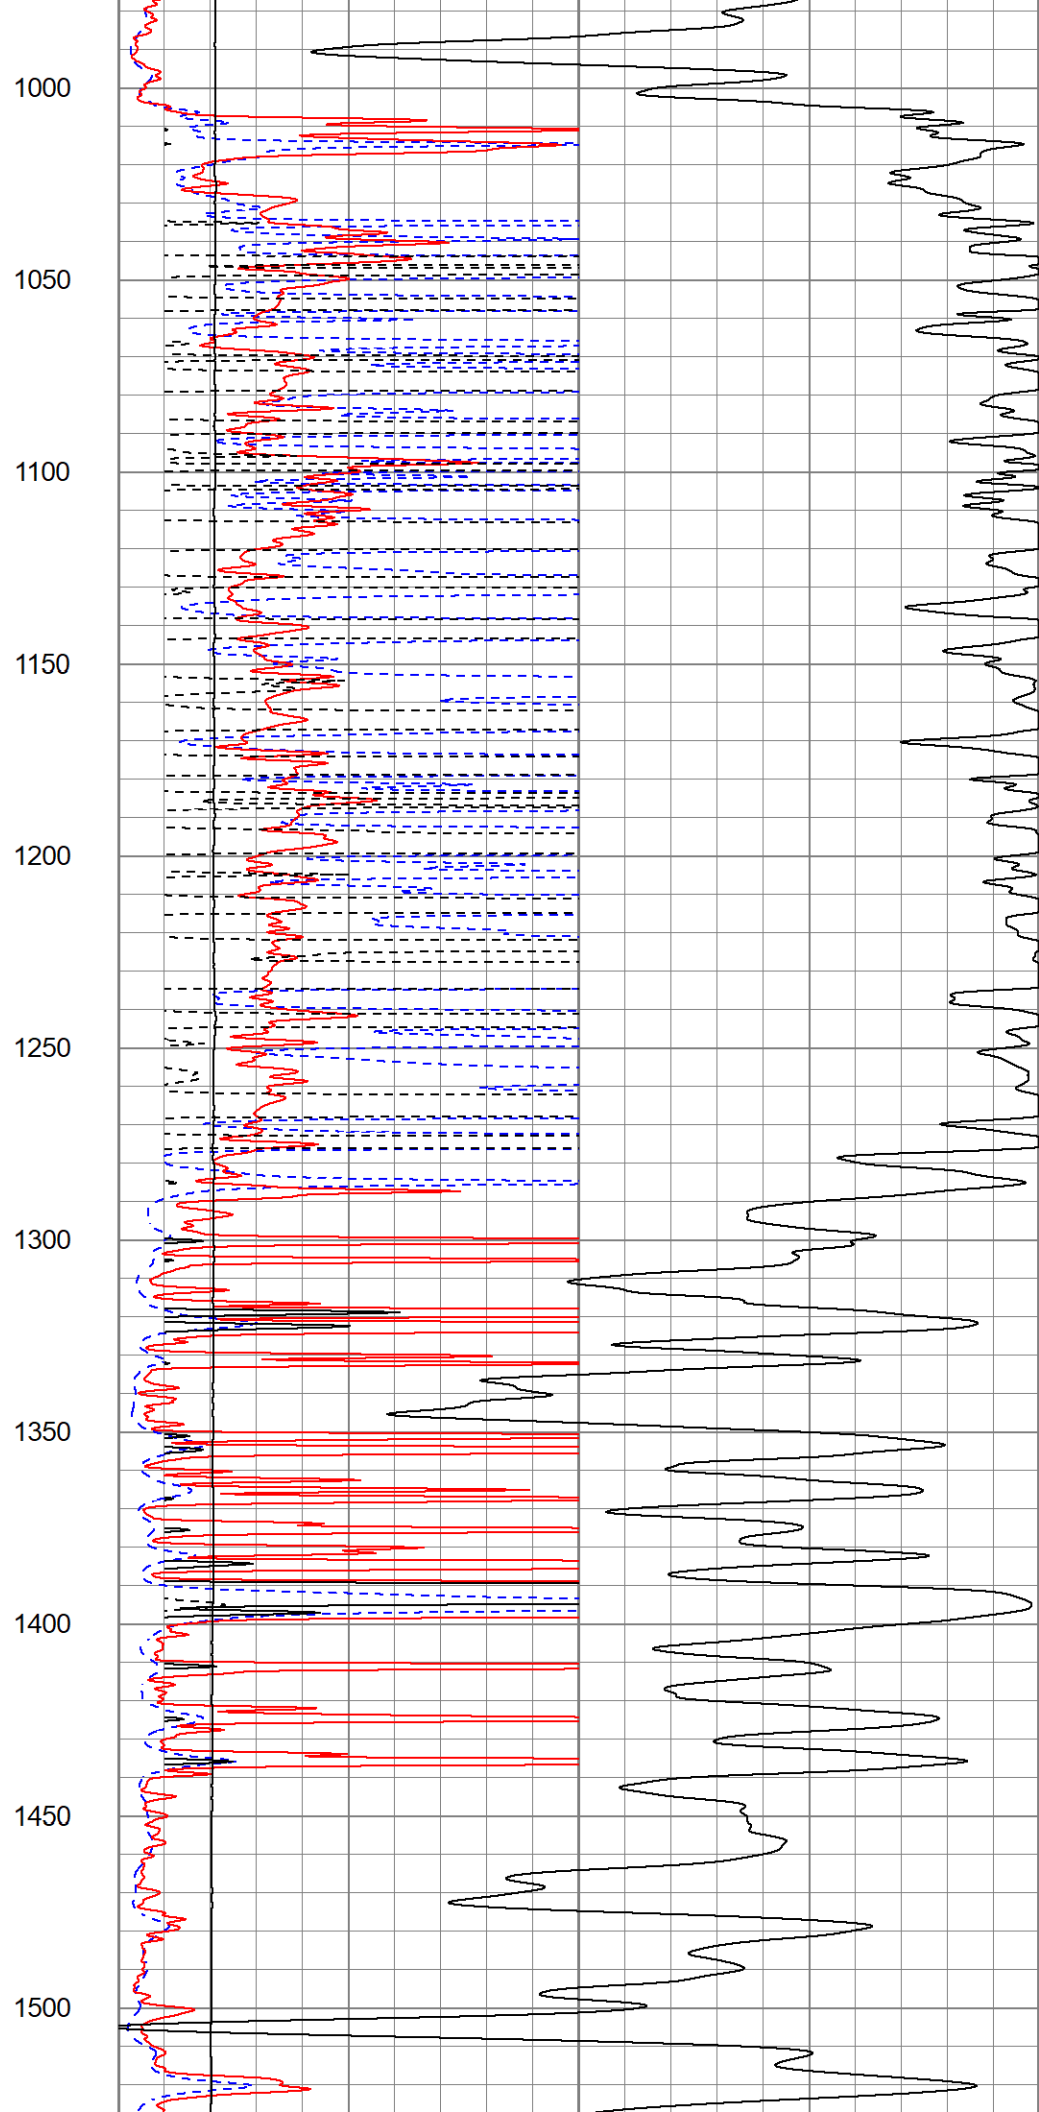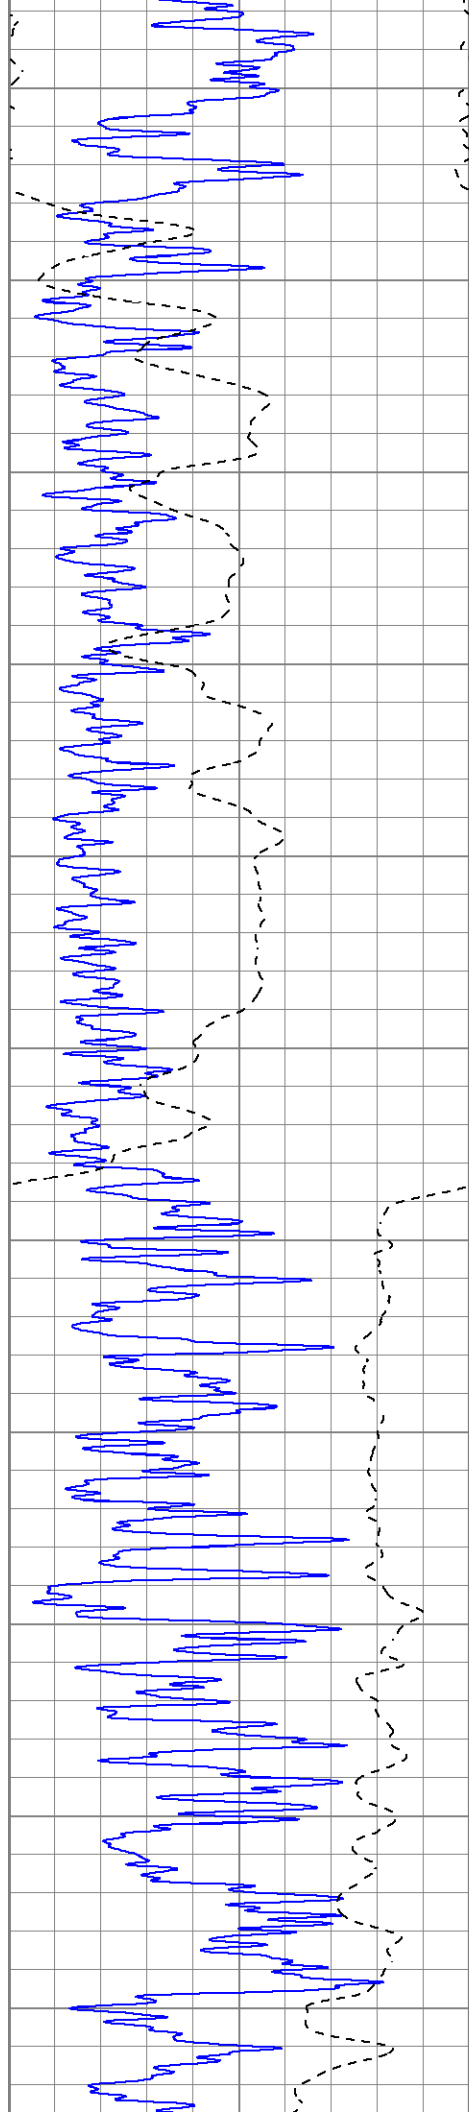

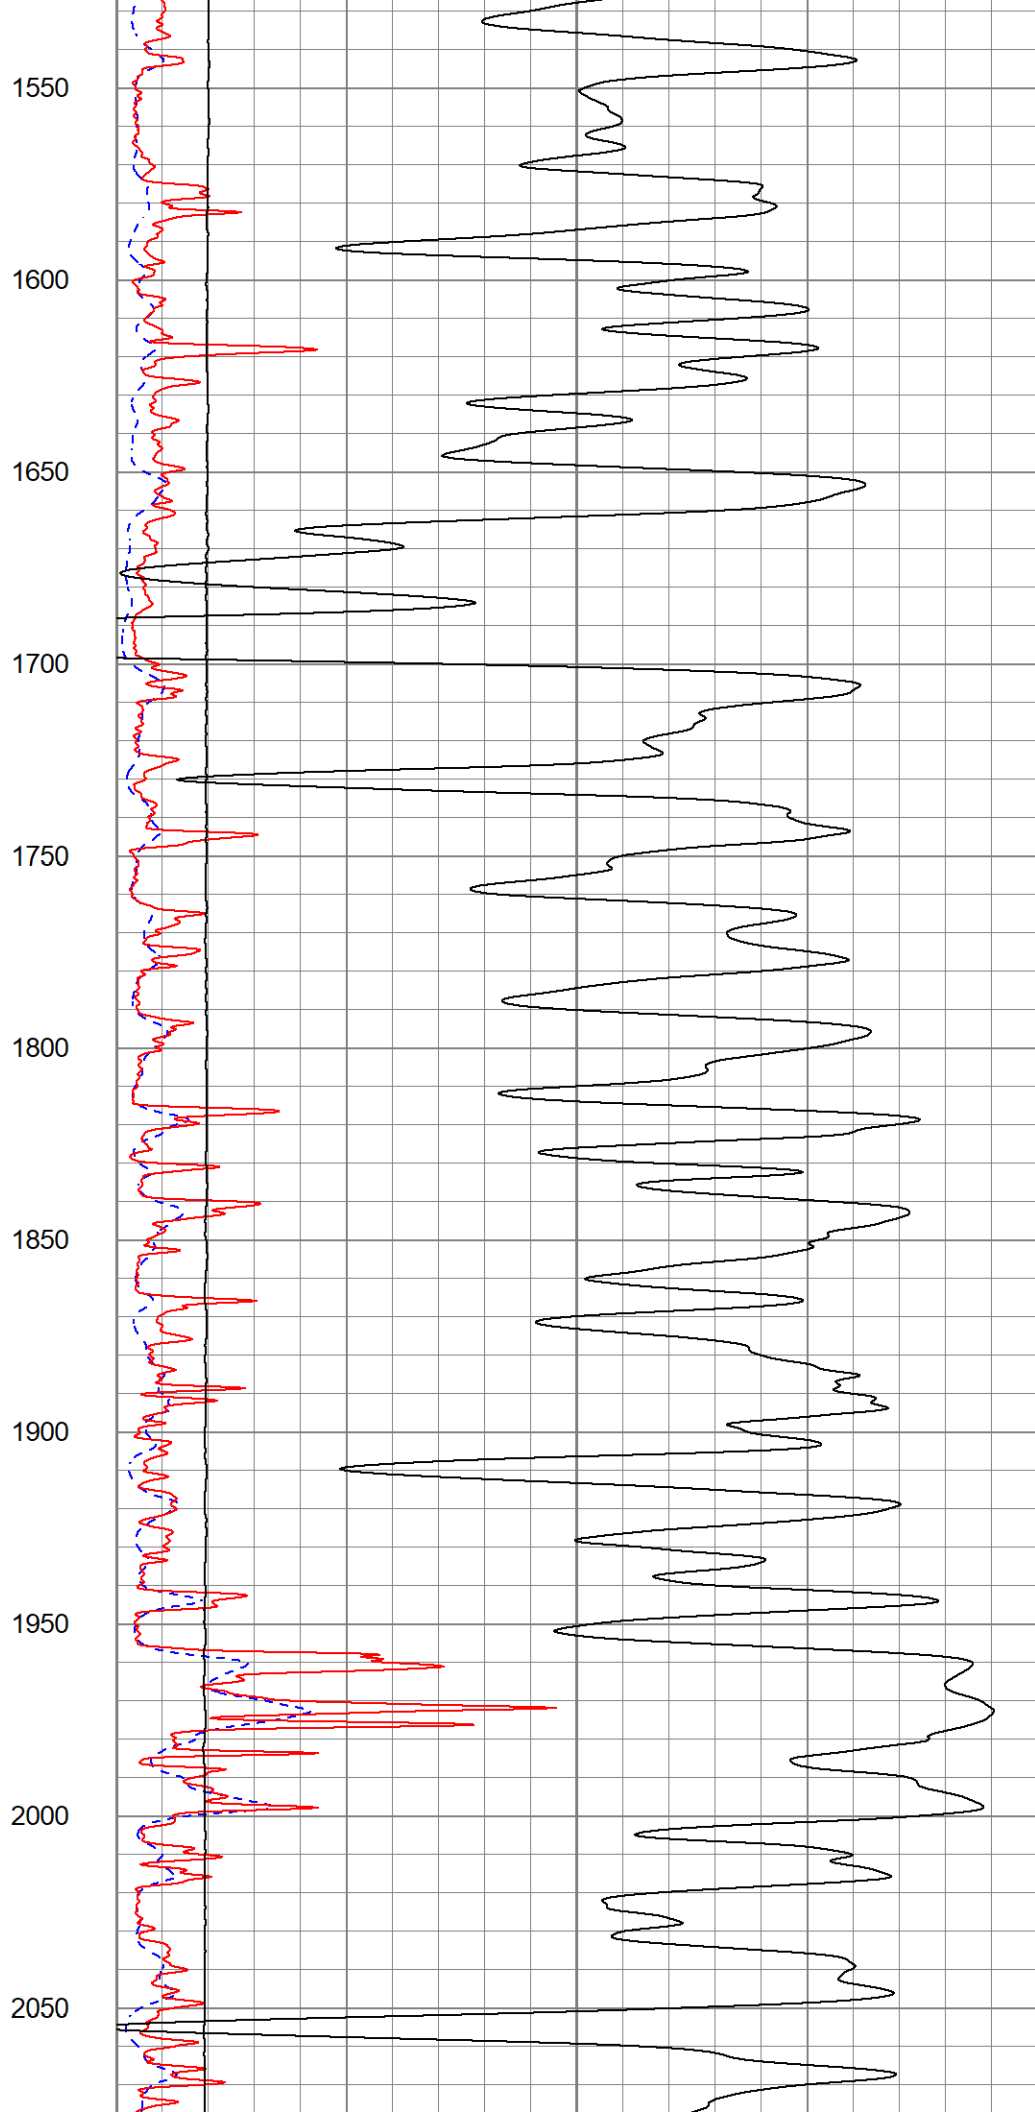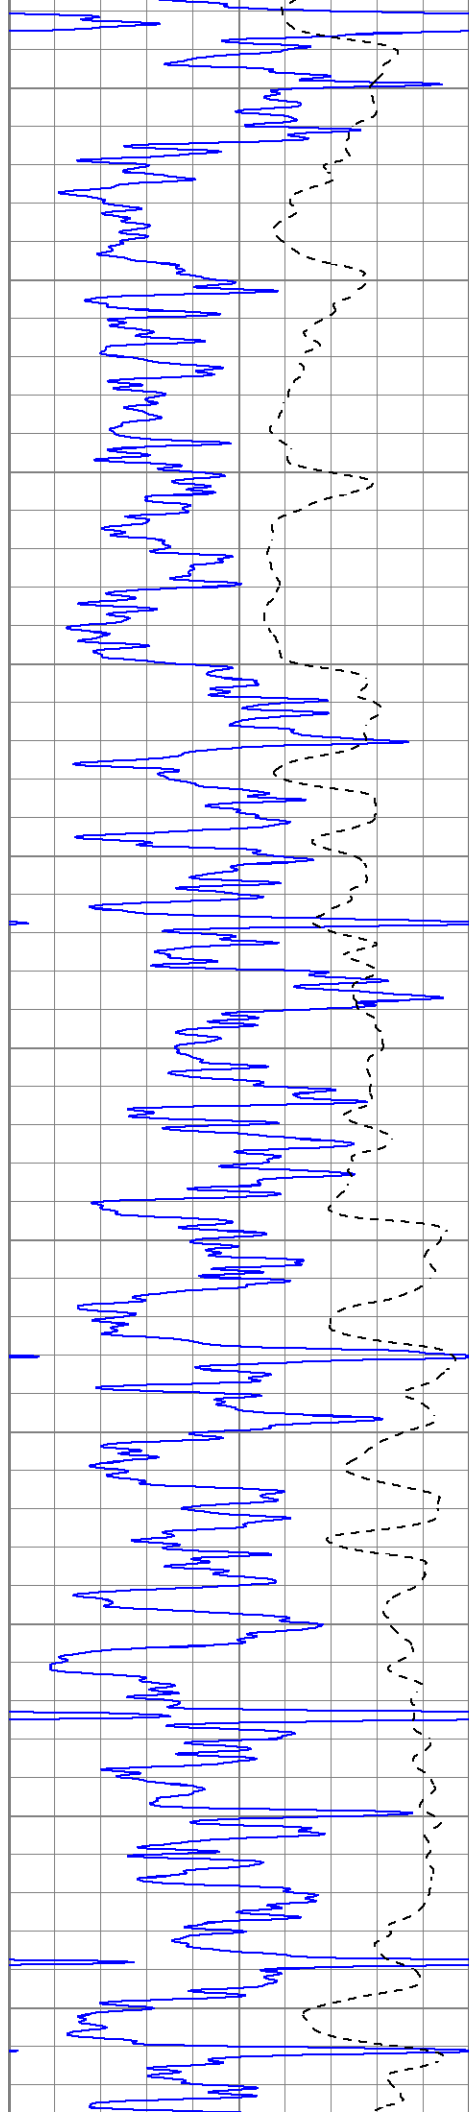

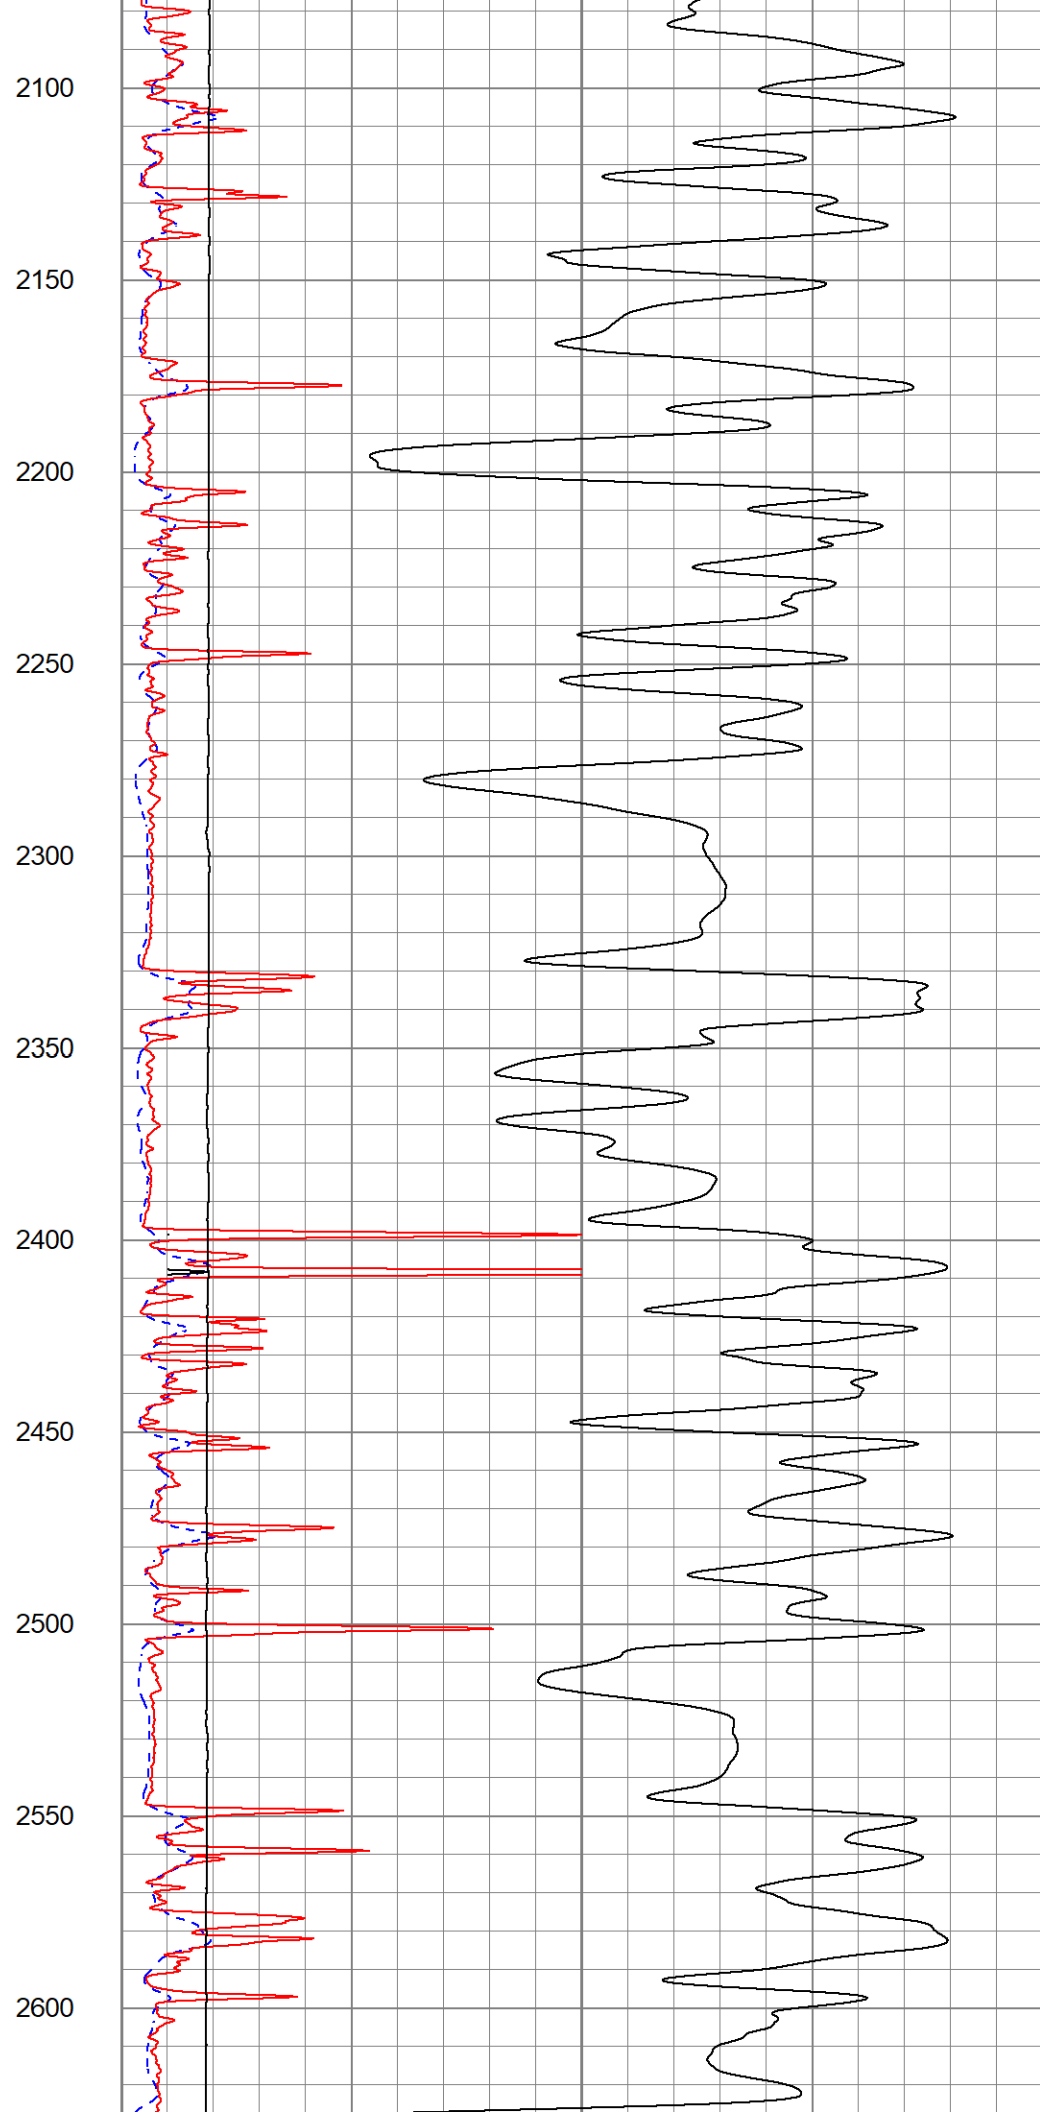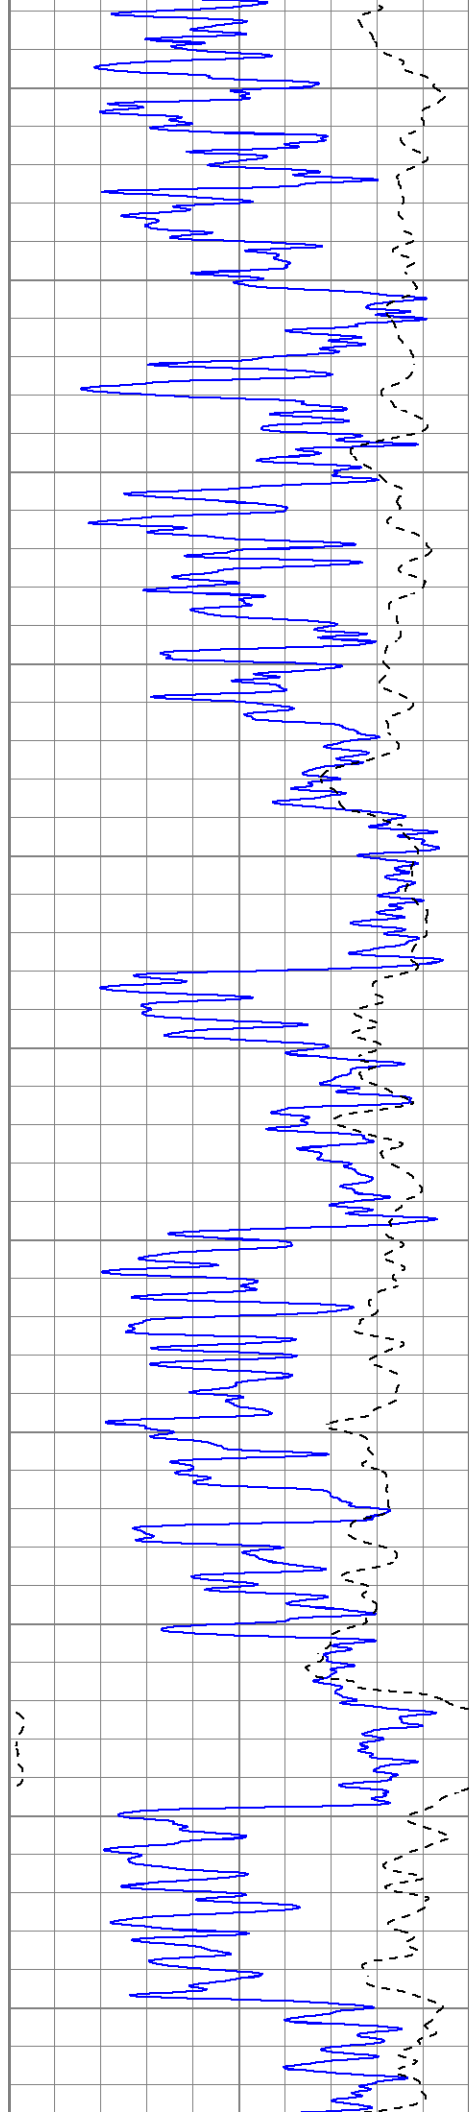

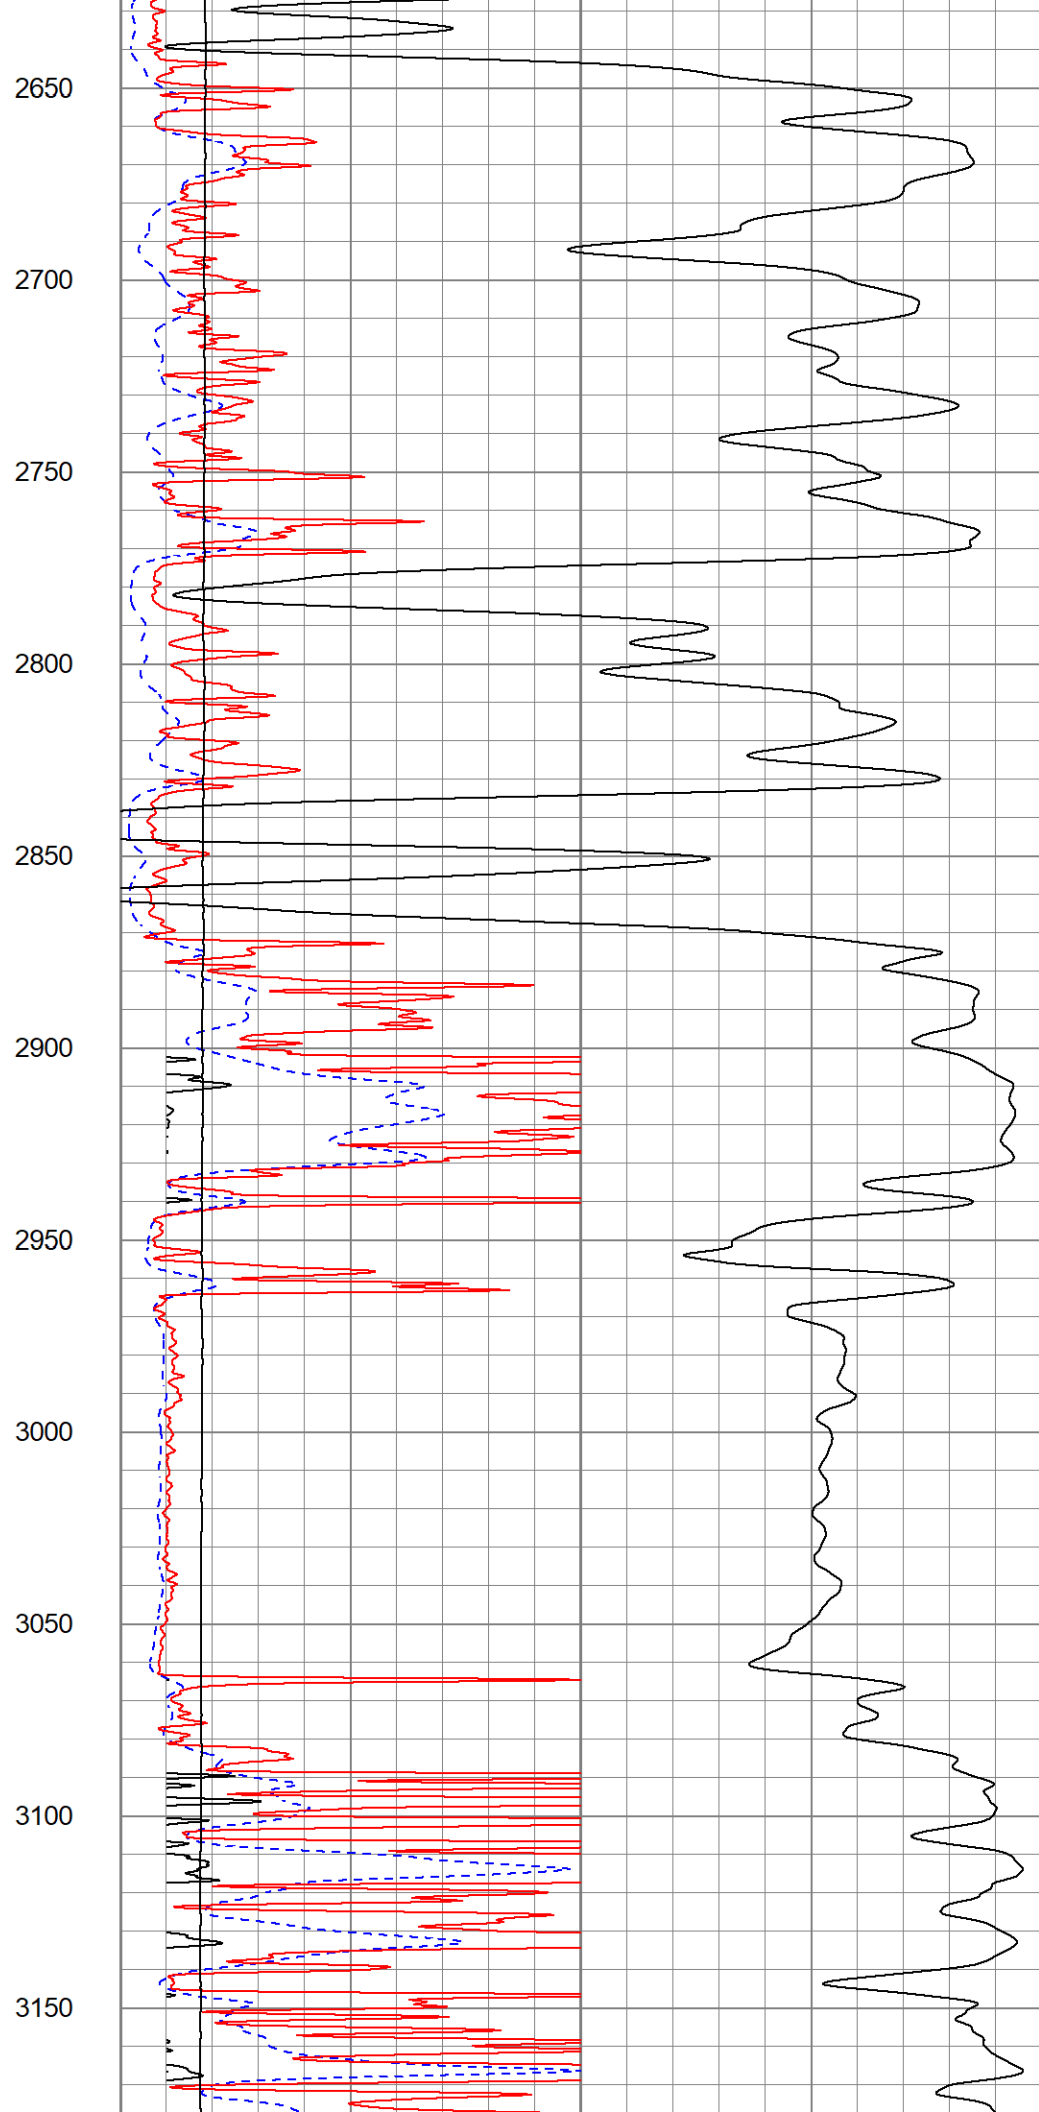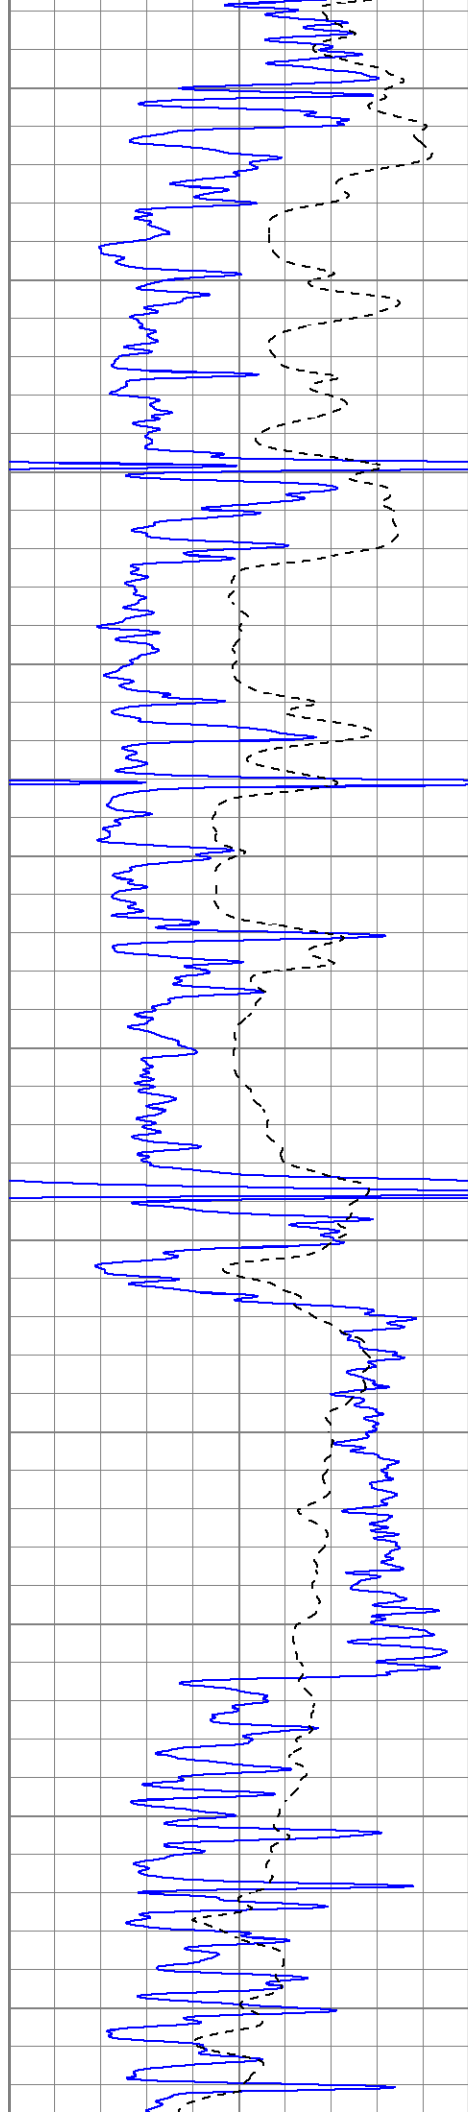


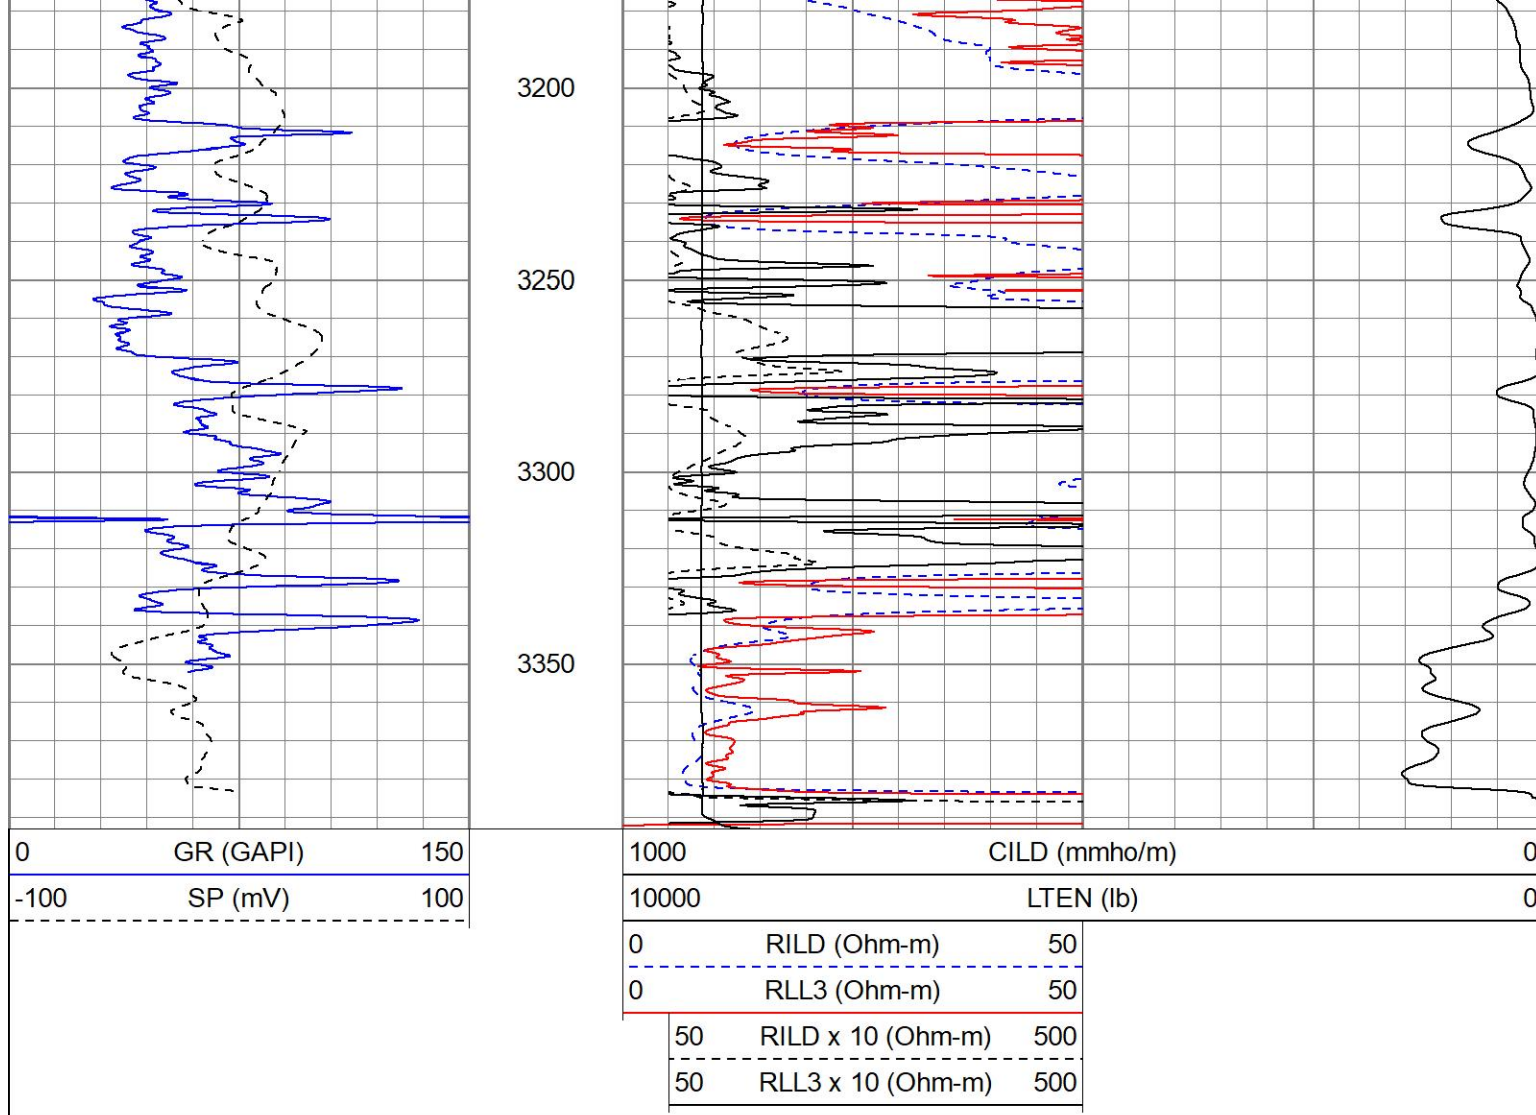


MAIN PASS

Database File sosara#1oh.db
Dataset Pathname pass6
Presentation Format kdil
Dataset Creation Thu Sep 14 13:17:44 2023
Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150	0.2	RILD (Ohm-m)	2000
-100	SP (mV)	100	0.2	RLL3 (Ohm-m)	2000
			0.2	RILM (Ohm-m)	2000

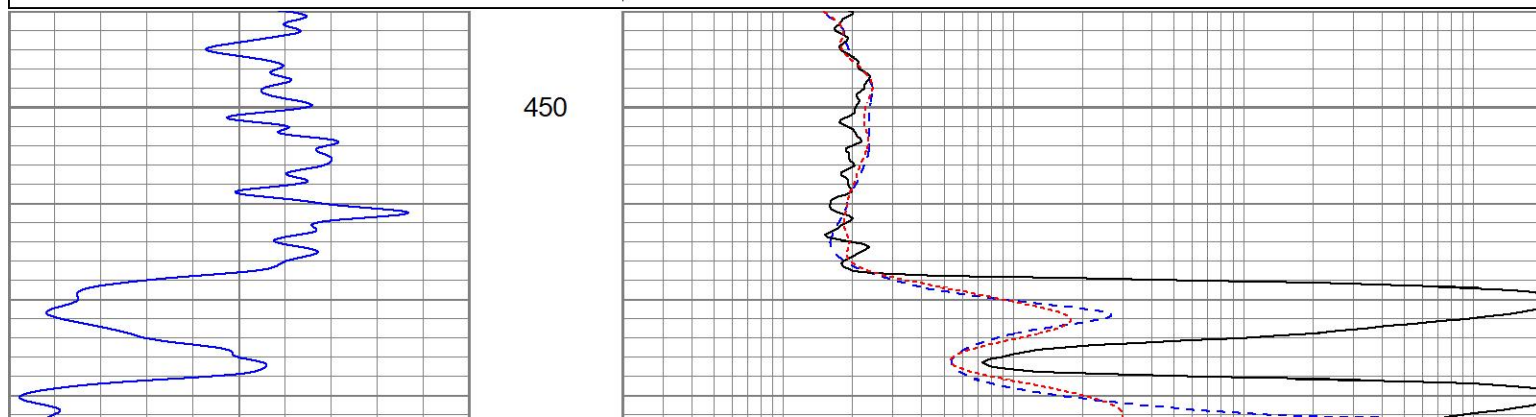


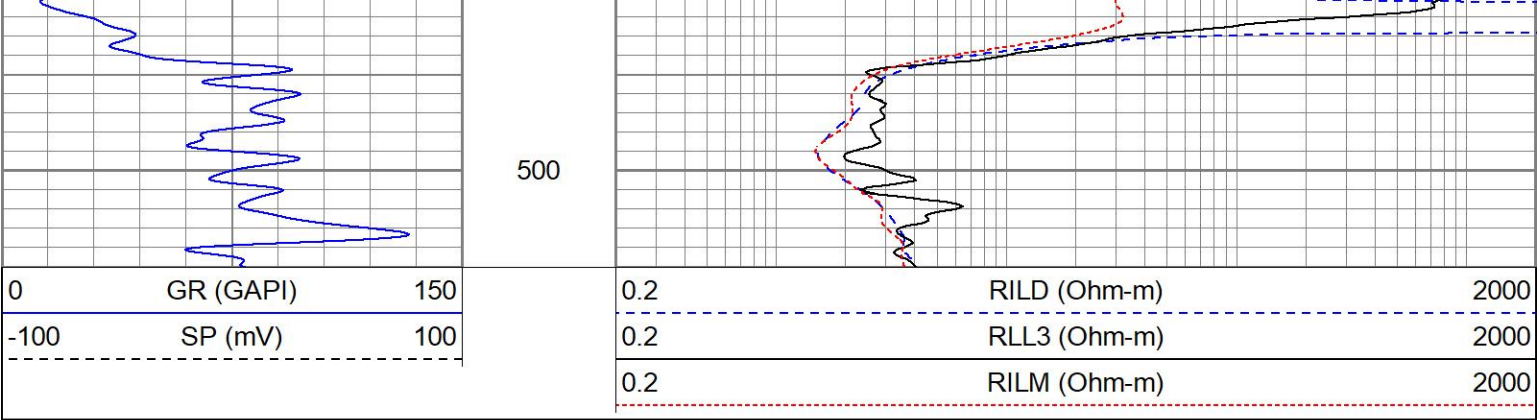

MAIN PASS

Database File sosara#1oh.db
Dataset Pathname pass6
Presentation Format kdil
Dataset Creation Thu Sep 14 13:17:44 2023
Charted by Depth in Feet scaled 1:240

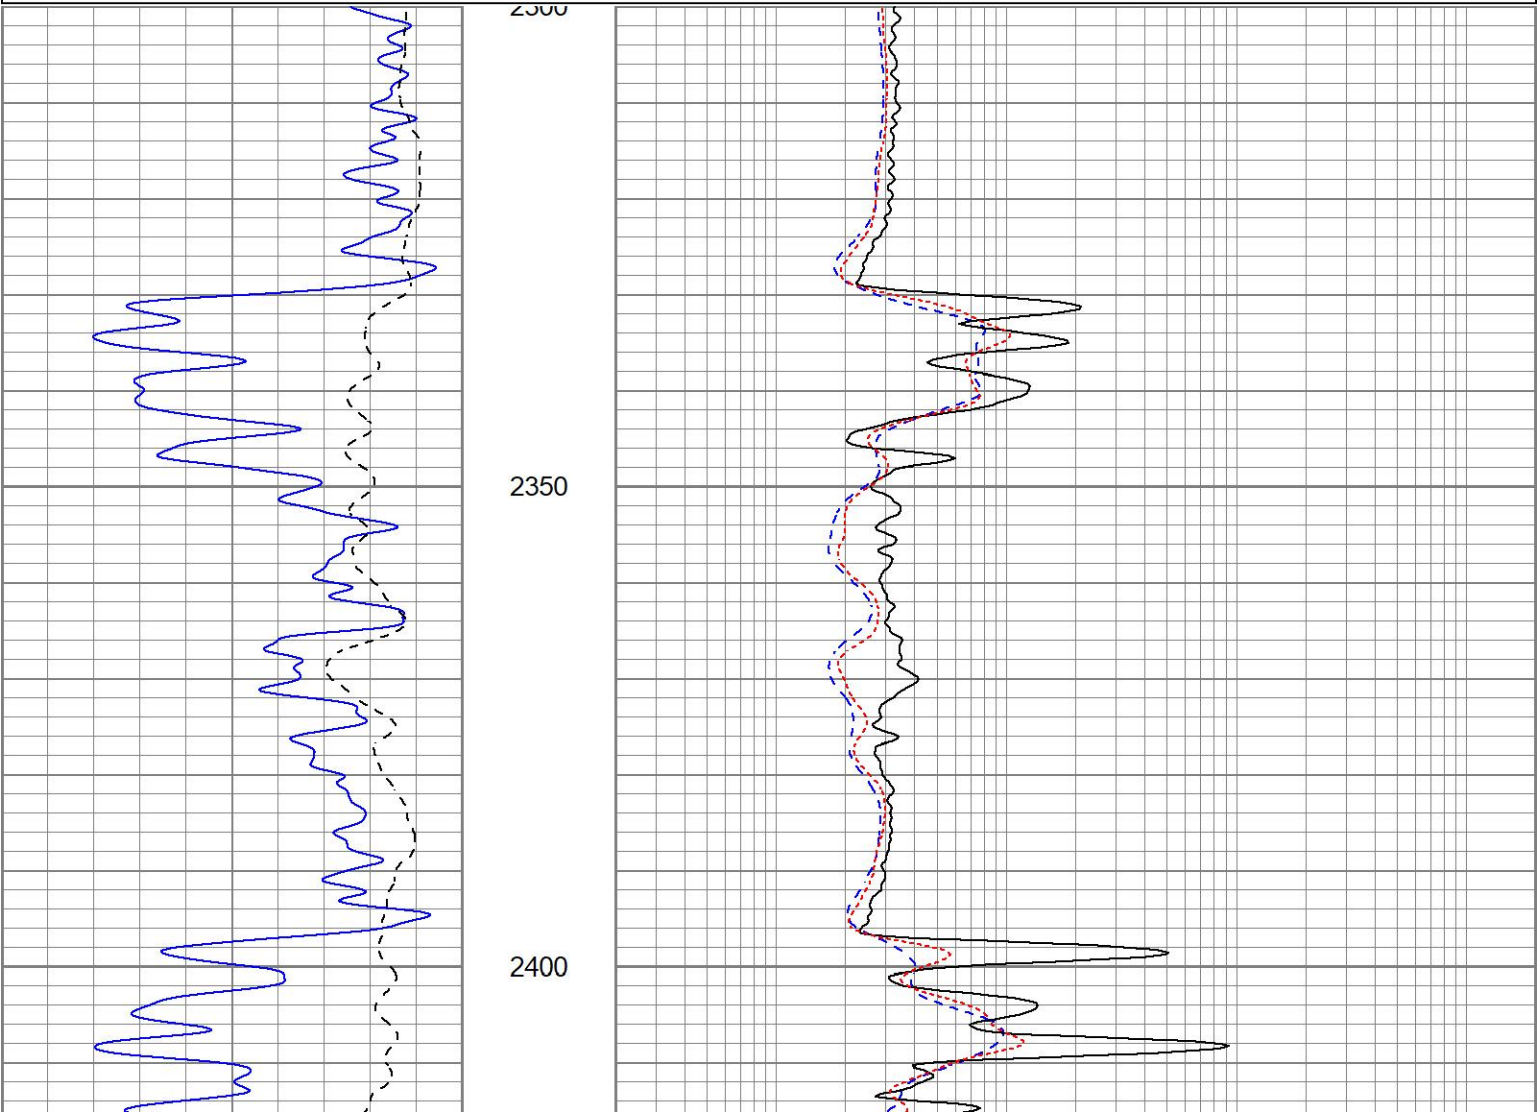

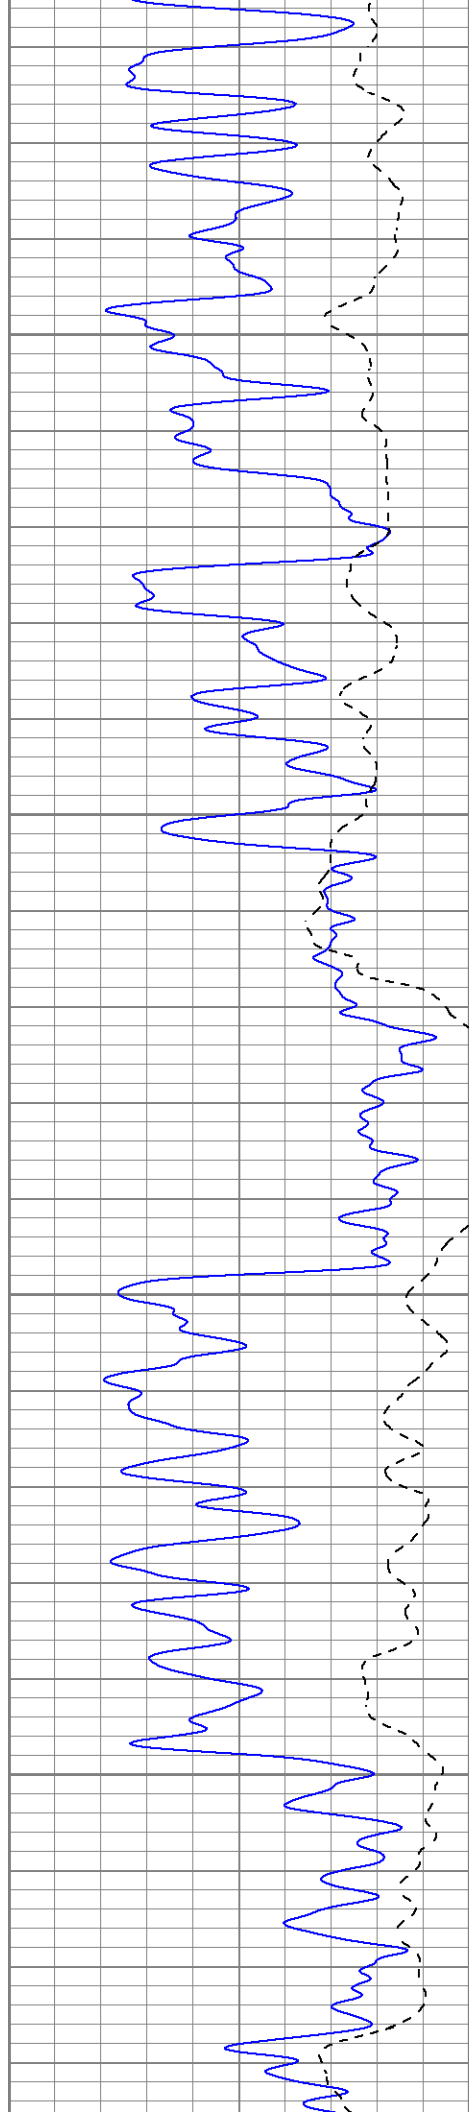



2450

2500

2550

2600

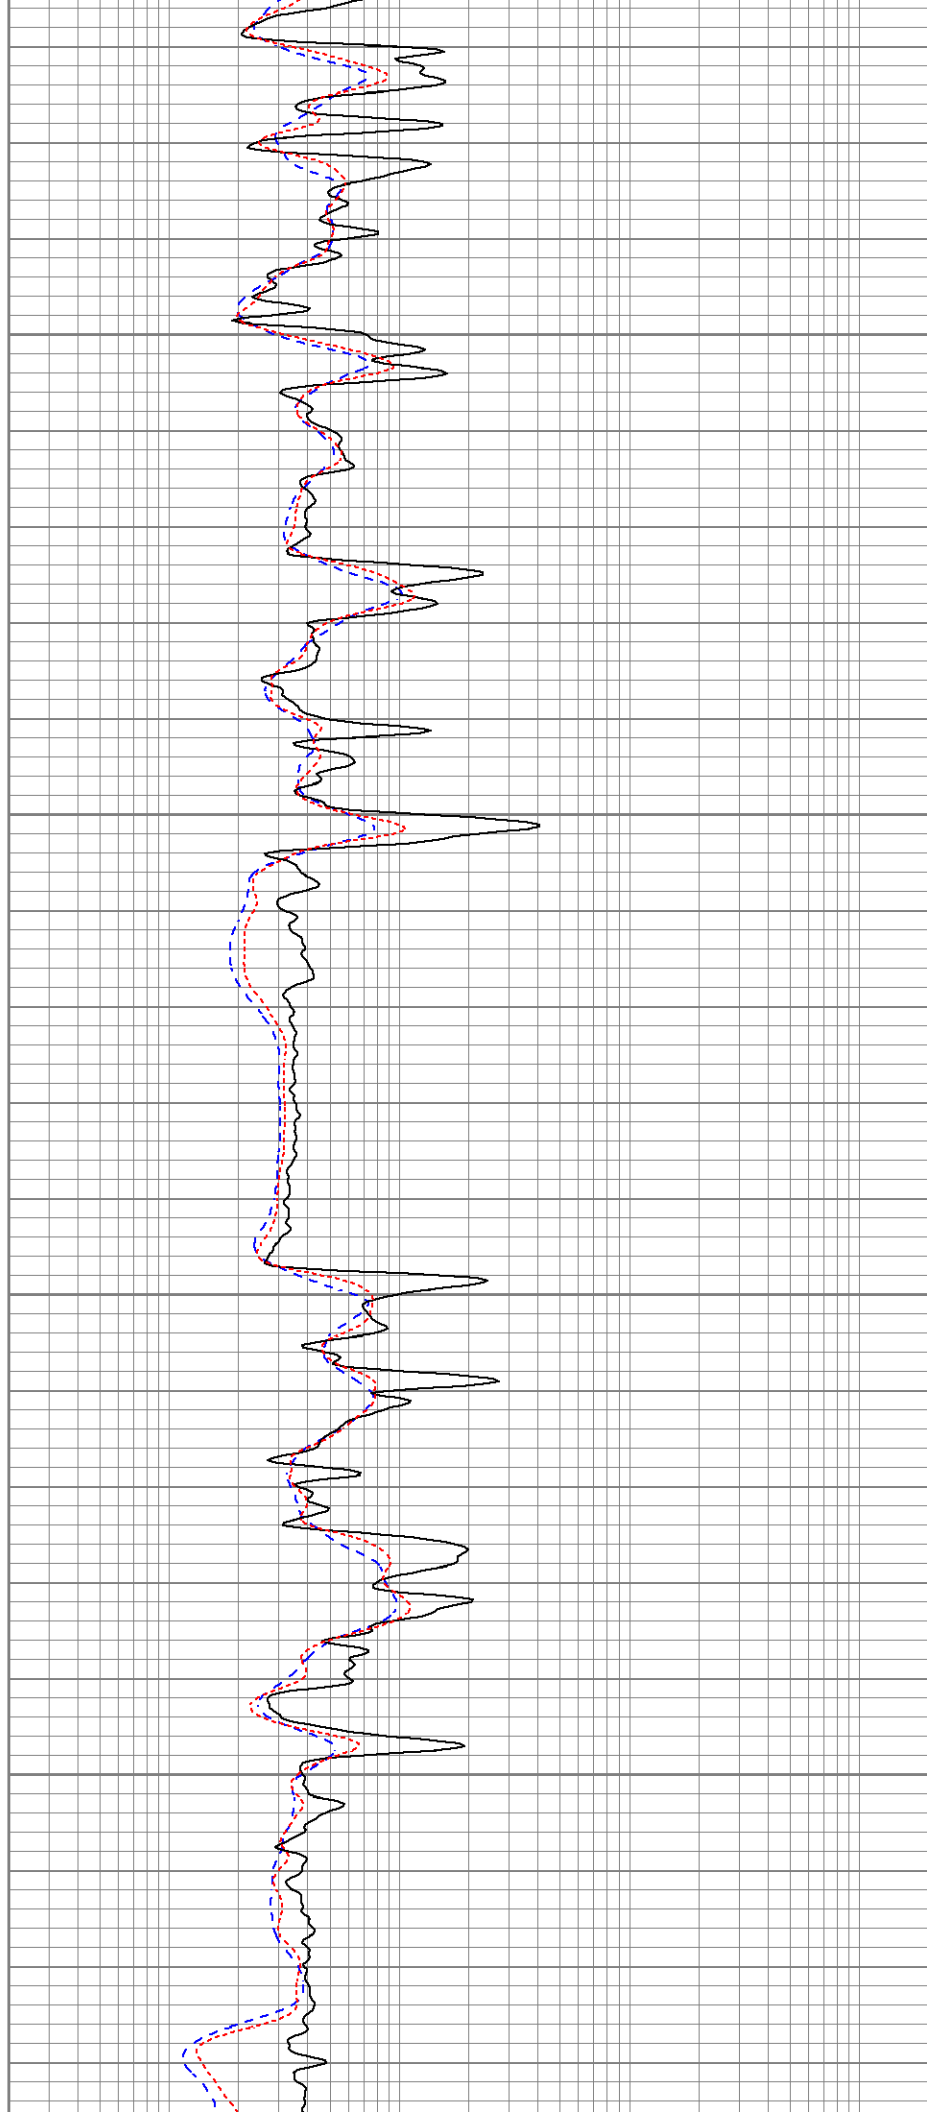

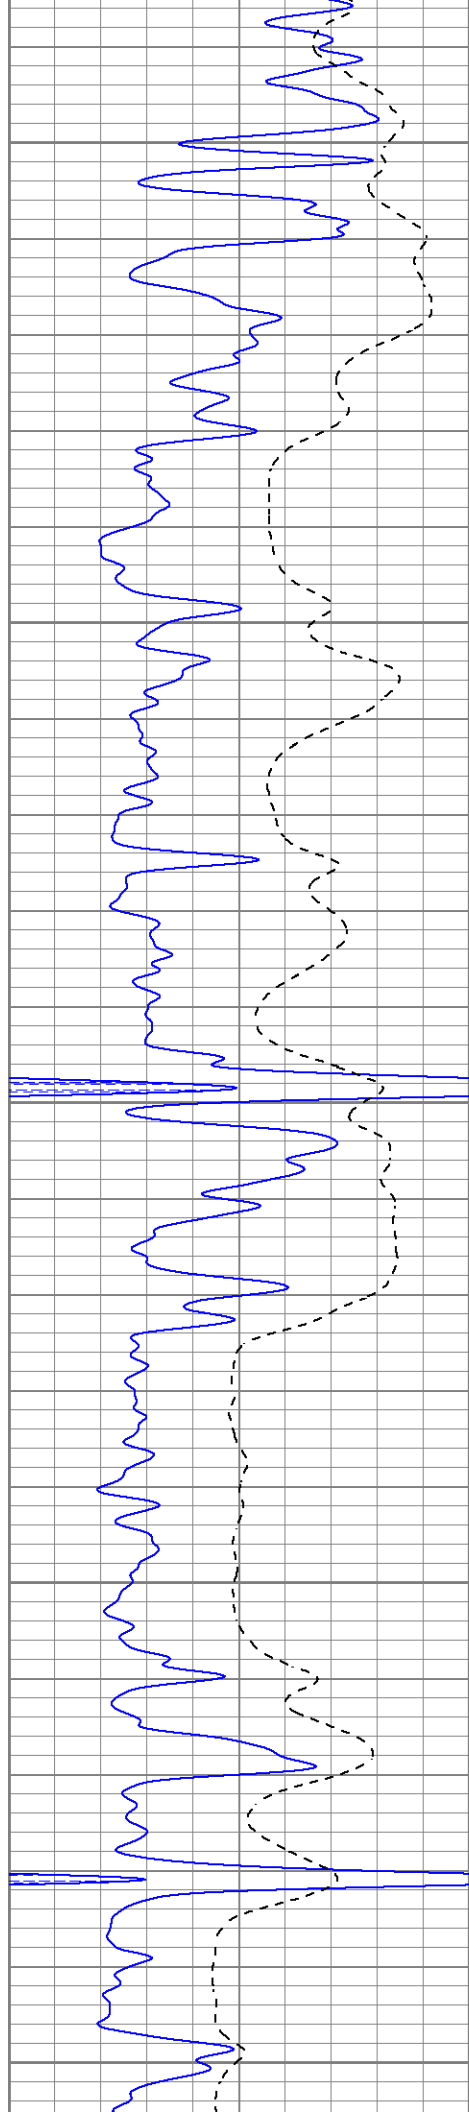


2650


2700

2750

2800

2850

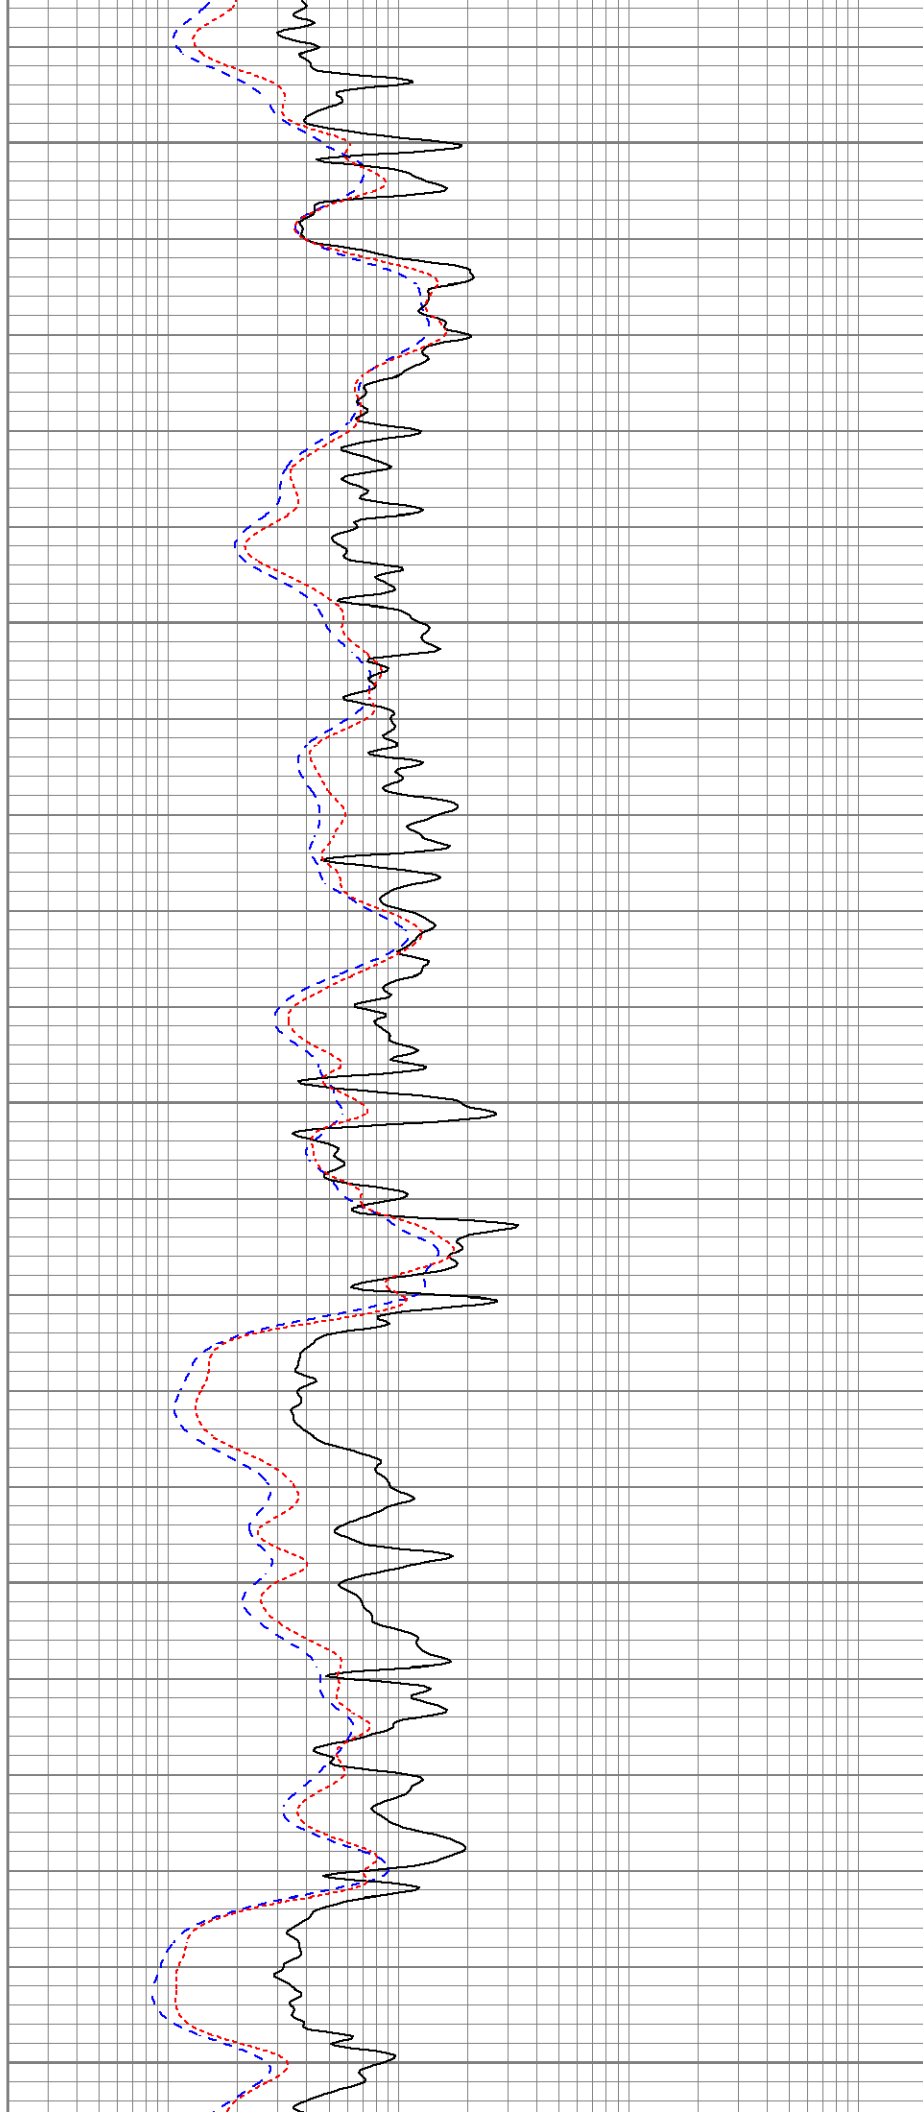

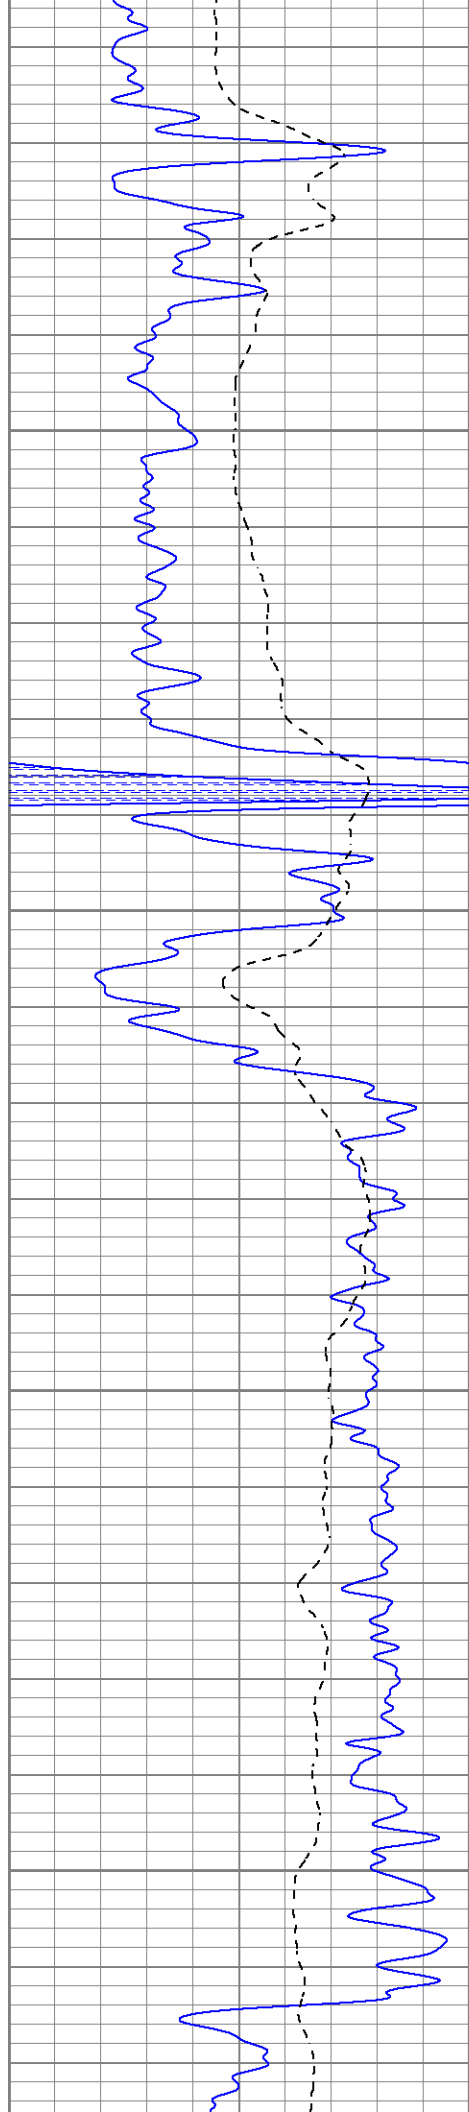



2900

2950

3000

3050

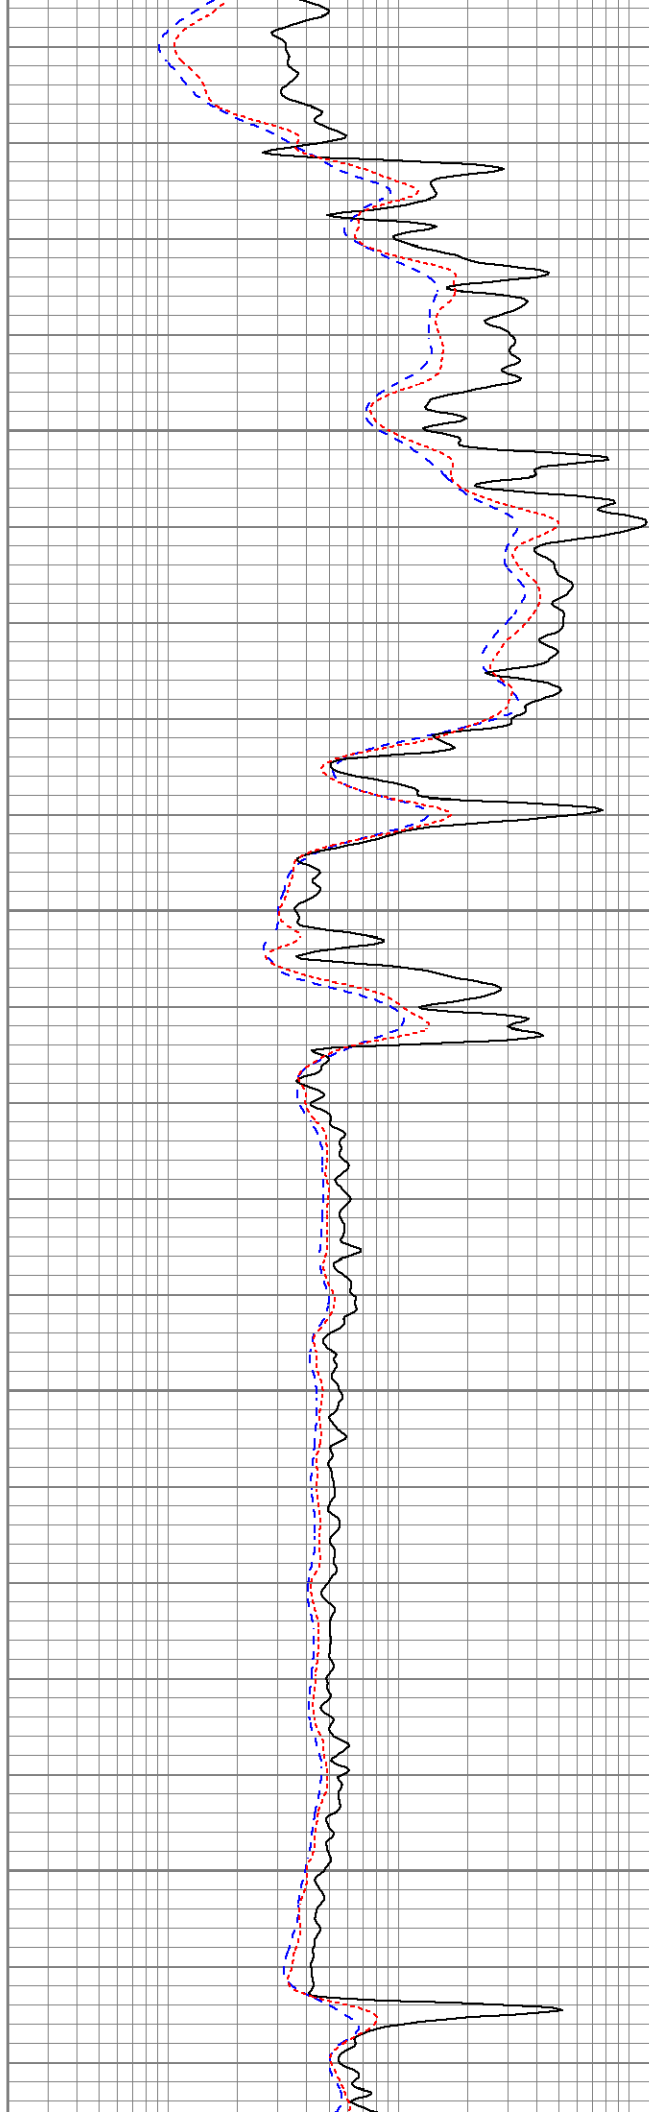

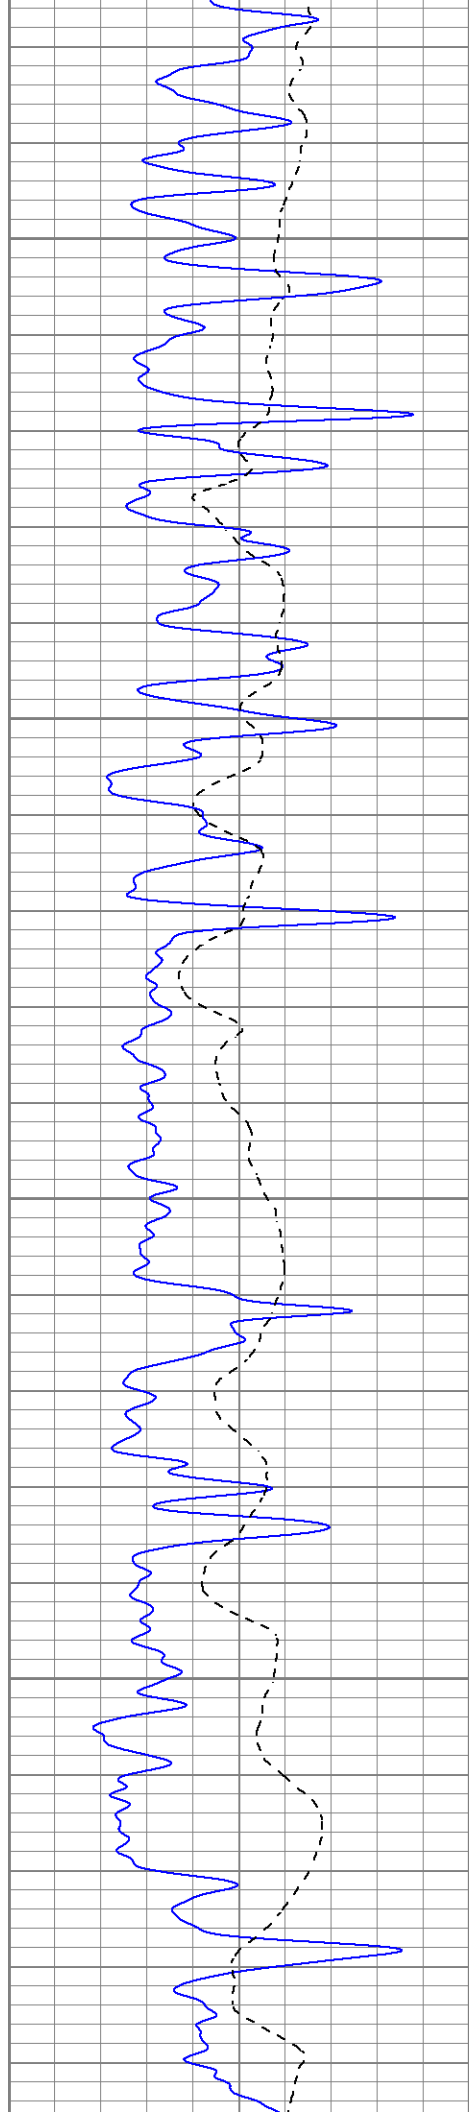



3100

3150

3200

3250

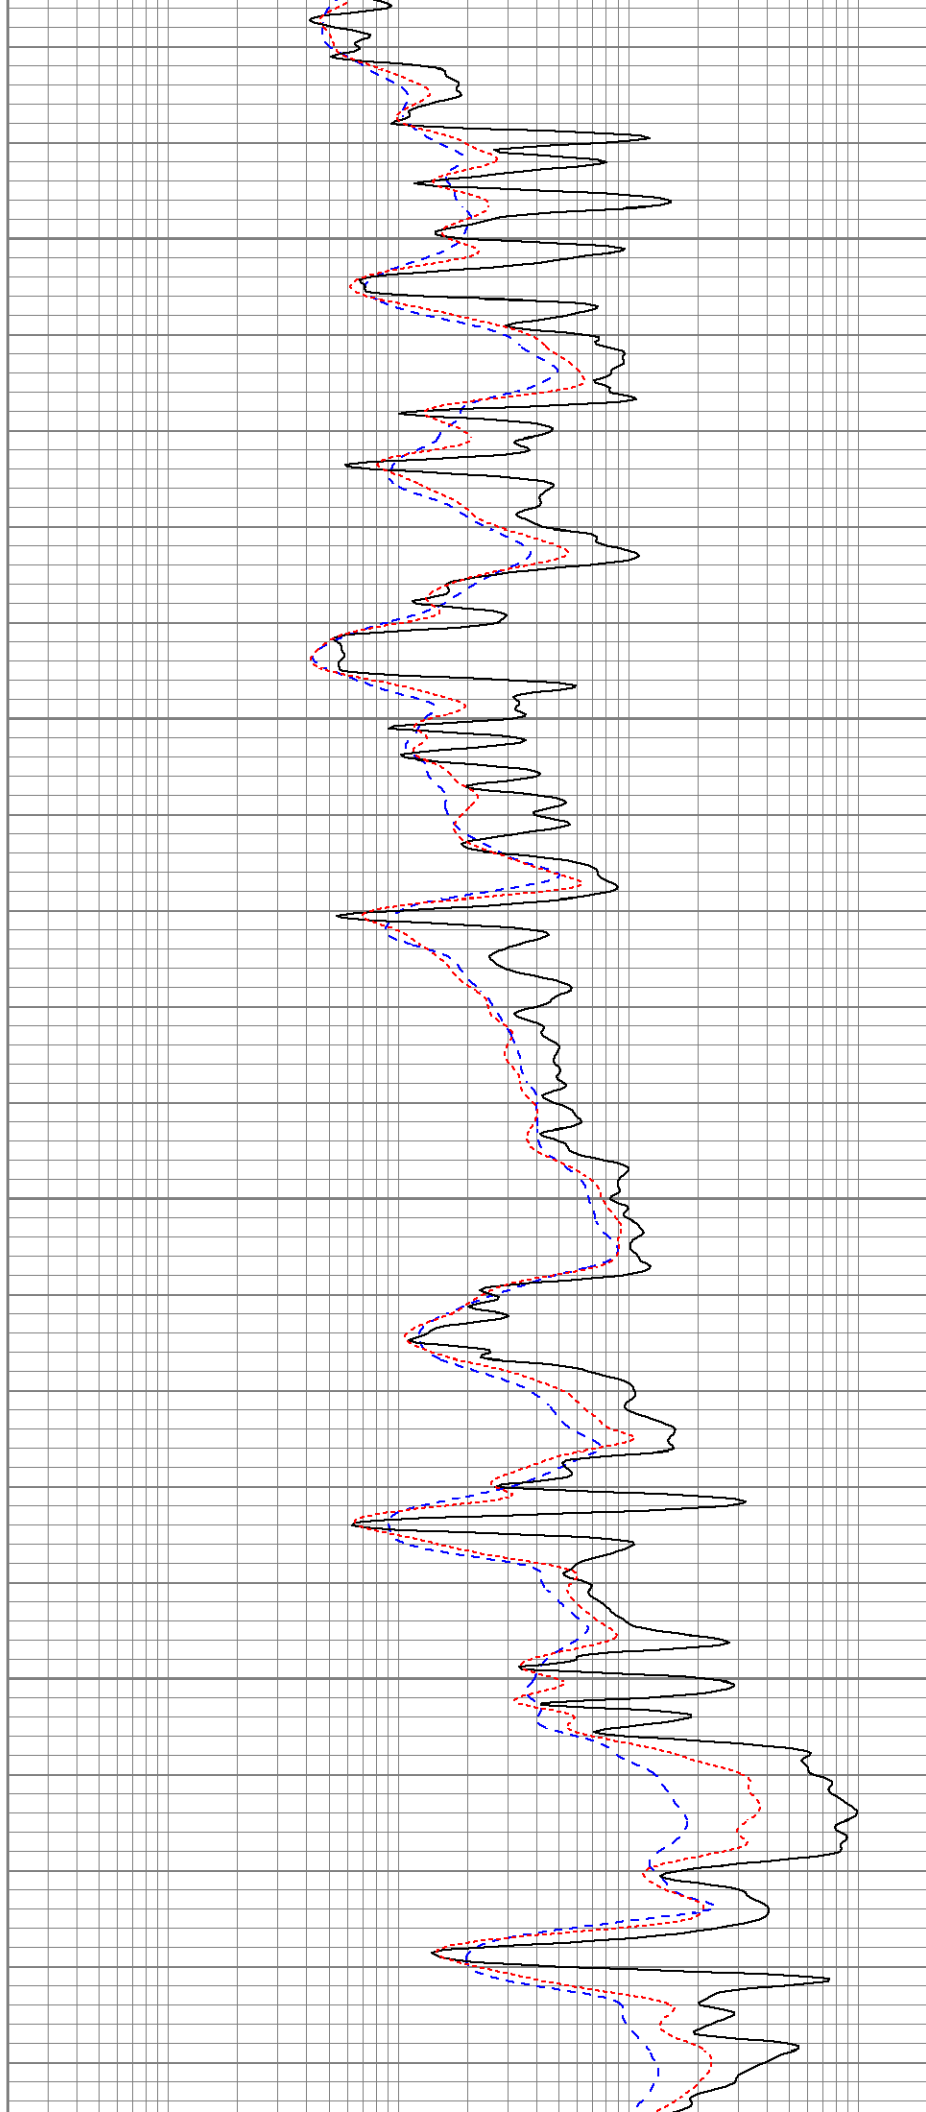


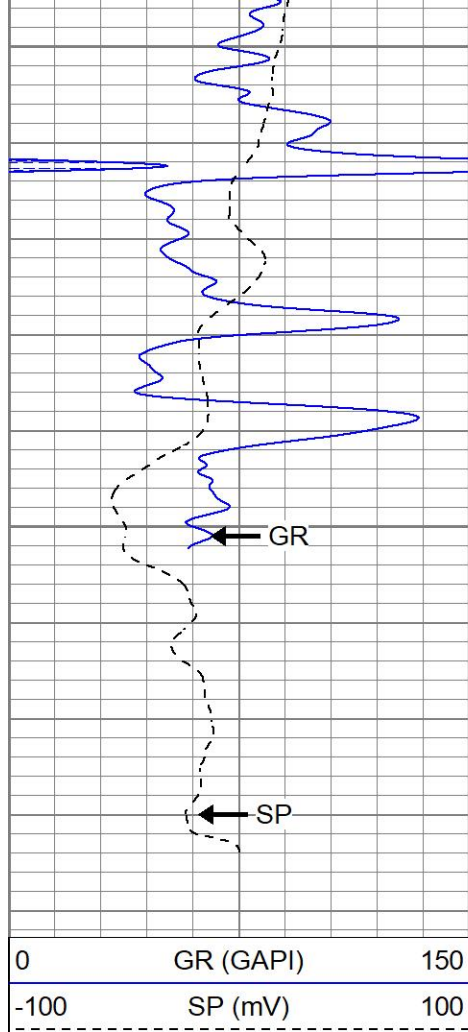

3300

3350

LTD 3390

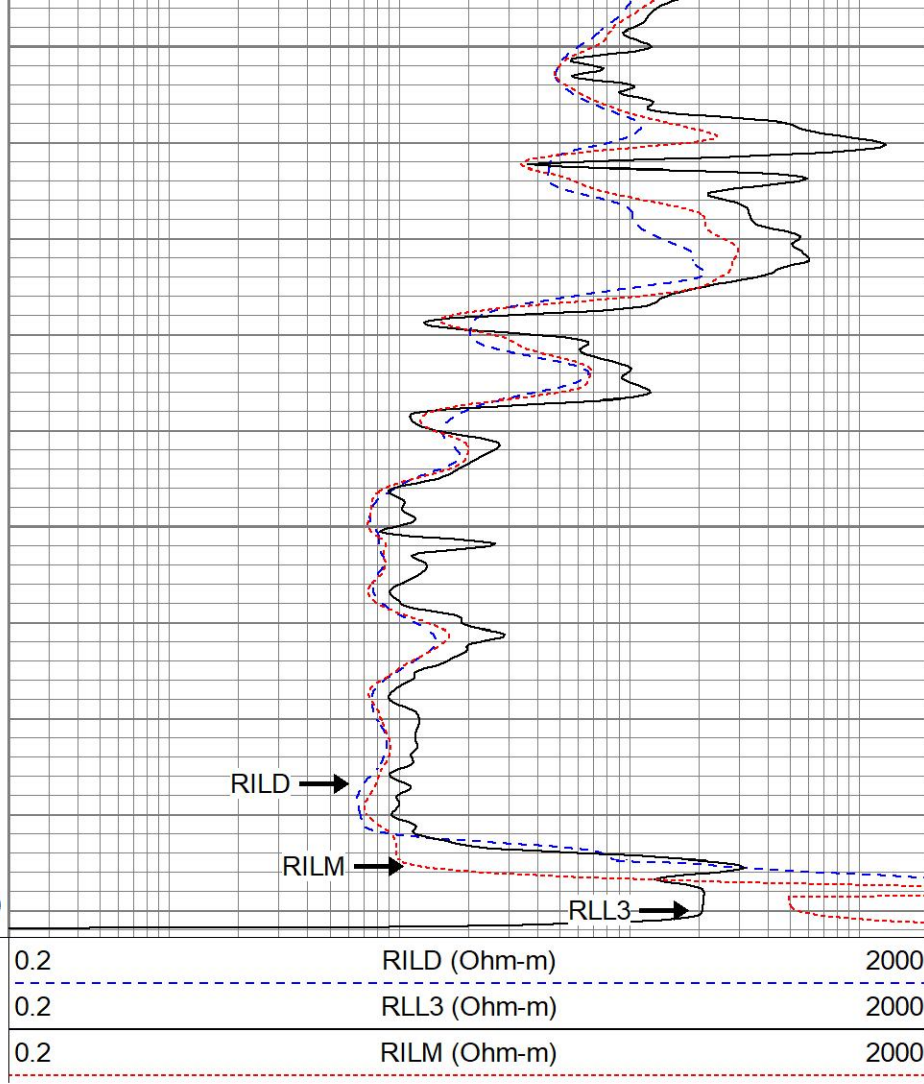


REPEAT SECTION


Database File sosara#1oh.db
 Dataset Pathname pass5.1
 Presentation Format kdil
 Dataset Creation Thu Sep 14 14:29:48 2023
 Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150
-100	SP (mV)	100

0.2	RILD (Ohm-m)	2000
0.2	RLL3 (Ohm-m)	2000
0.2	RILM (Ohm-m)	2000

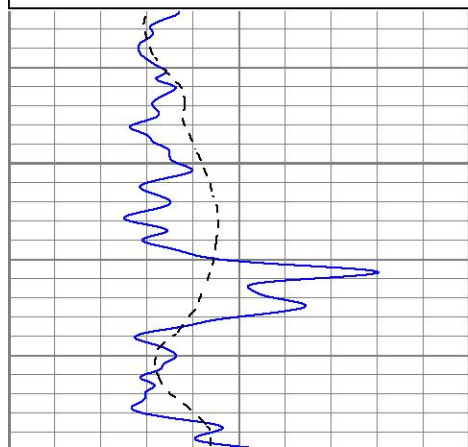

3200

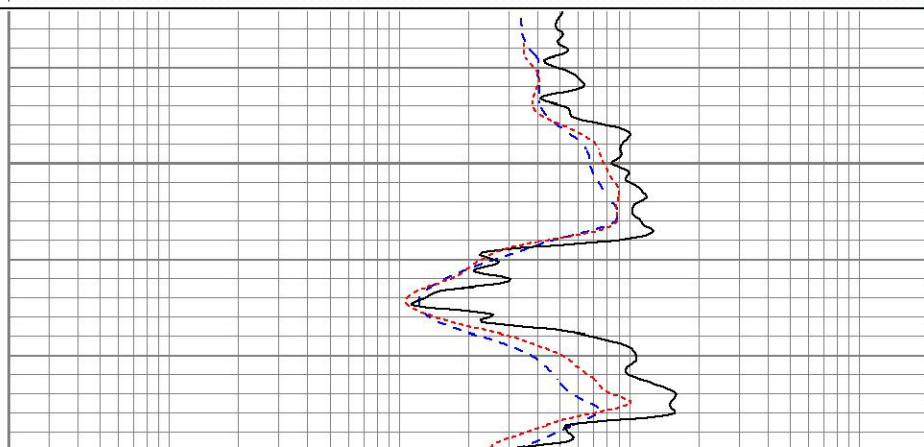

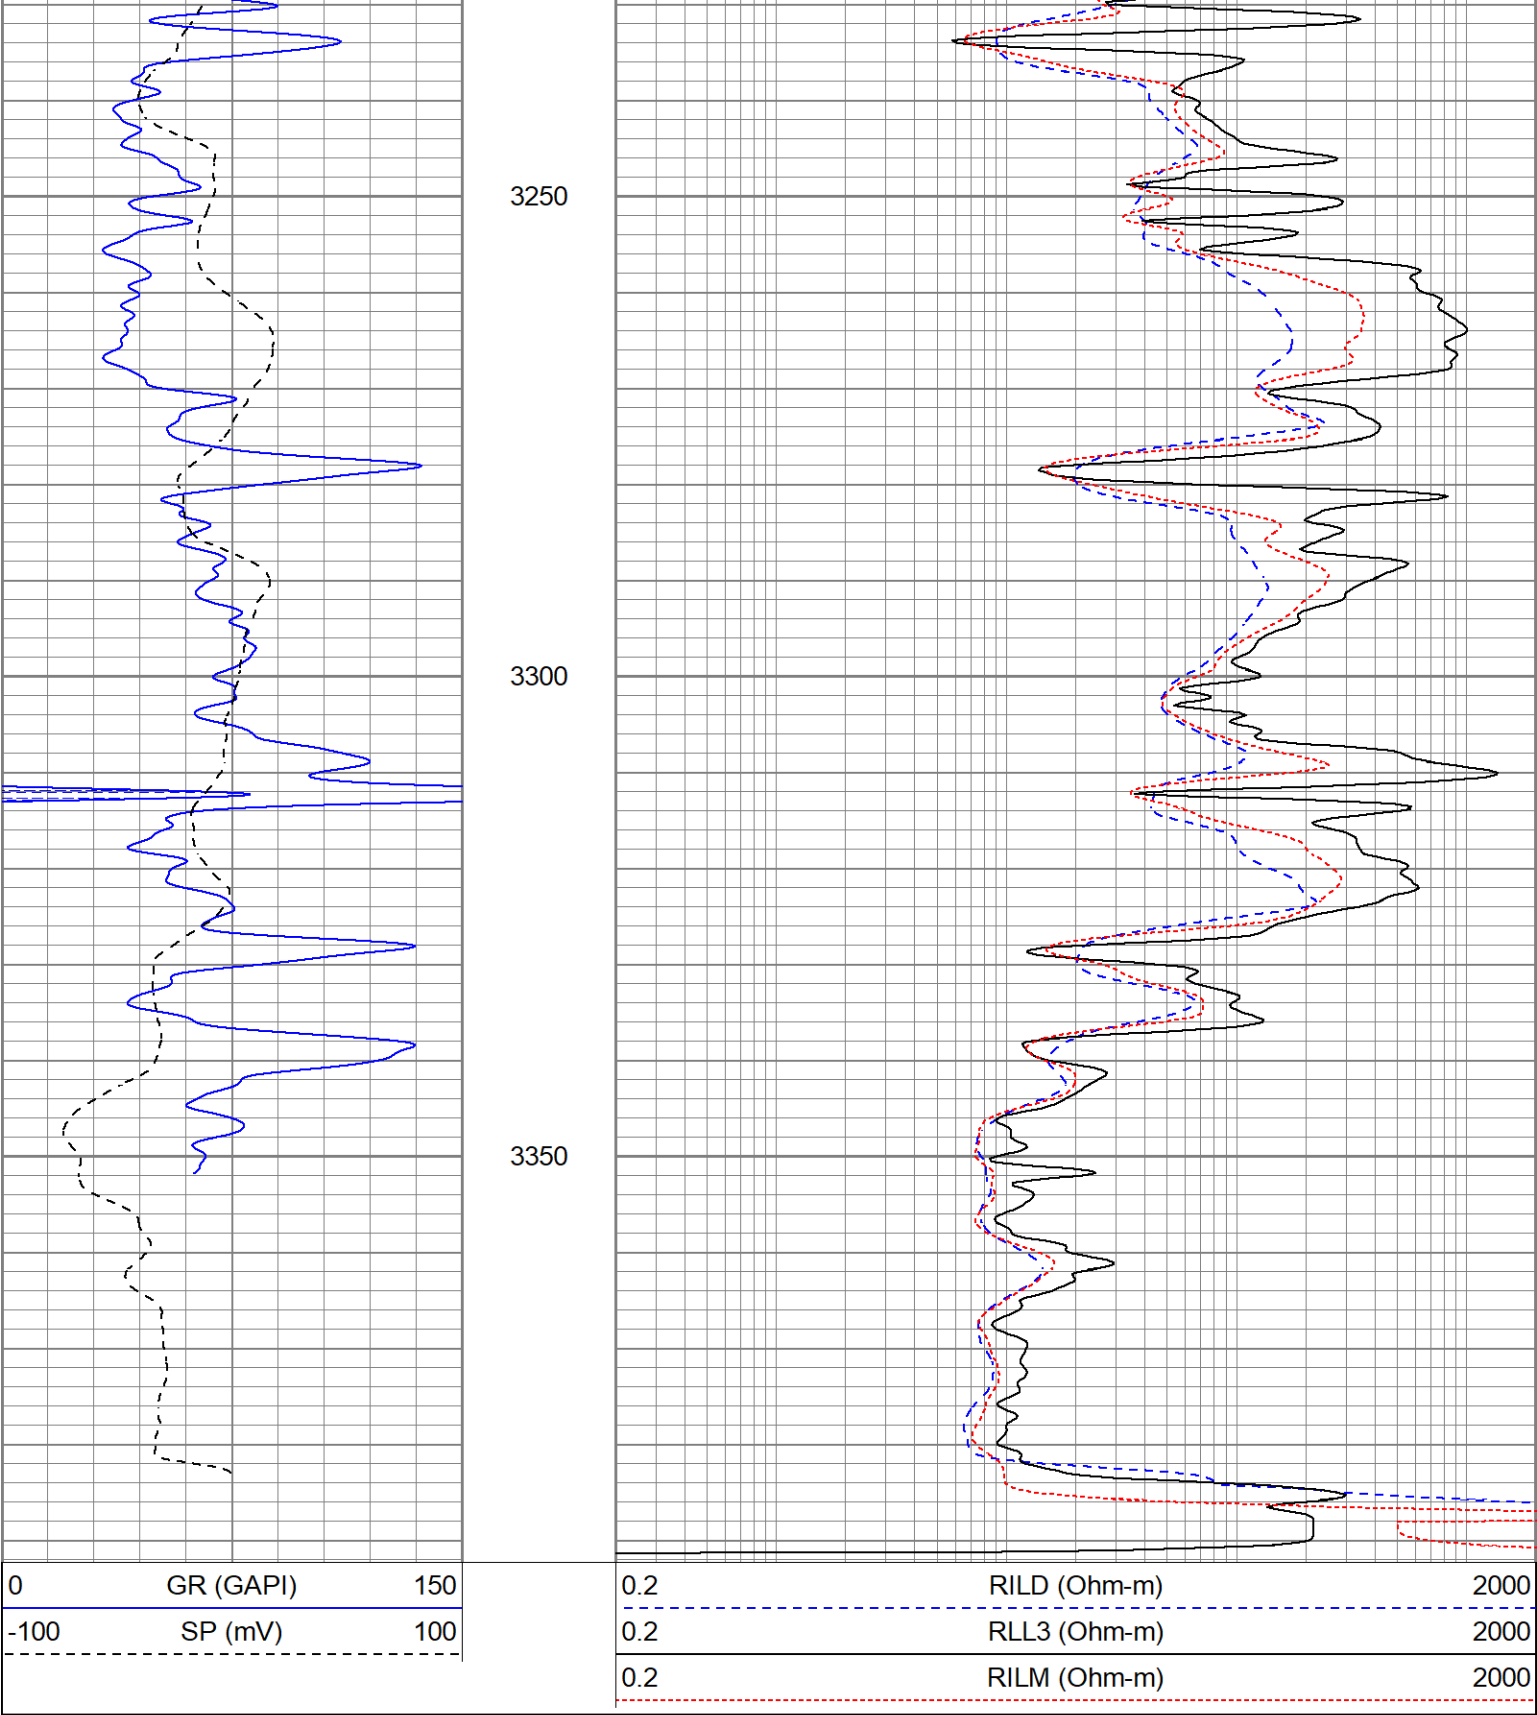

Calibration Report

Database File sosara#1oh.db
Dataset Pathname pass5.1
Dataset Creation Thu Sep 14 14:29:48 2023

Dual Induction Calibration Report

Serial-Model: 1842-ADM
Surface Cal Performed: Mon Sep 20 22:00:42 2021
Downhole Cal Performed: Thu Sep 14 13:06:48 2023
After Survey Verification Performed: Thu Sep 14 13:02:29 2023

Surface Calibration								
Readings			References			Results		
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.018	0.672	V	0.000	350.000	mmho/m	535.475	-9.896
Medium	0.003	0.769	V	0.000	400.000	mmho/m	522.607	-1.745
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.018	0.672	V	0.000	350.000	mmho/m	535.240	-9.549
Medium	0.003	0.768	V	0.000	550.000	mmho/m	718.637	-2.088

Downhole Calibration								
Readings			References			Results		
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	-0.210	349.810	mmho/m	-0.343	349.810	mmho/m	1.000	-0.133
Medium	6.952	396.760	mmho/m	-0.226	399.745	mmho/m	1.026	-7.360
Shallow	2.495	0.026	V	500.000	2.000	Ohm-m	201.711	-3.319

After Survey Verification								
Readings			Targets			Results		
Internal:	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	32.030	5.643	mmho/m	1.000	-0.133
Medium	0.000	0.000	mmho/m	6.952	396.760	mmho/m	1.026	-7.360
Shallow	0.000	0.000	Ohm-m	500.000	2.000	Ohm-m	1.000	0.000

Admyr Lithodensity Calibration Report								
Serial-Model:				1C-C				
Source:				Blue2				
Master Calibration Performed:				Tue Aug 30 10:20:37 2022				

Master Calibration					
	Density		Far Detector	Near Detector	
Magnesium	1.670	g/cc	6362.49	3546.71	cps
Aluminium	2.640	g/cc	1733.54	2362.69	cps
Aluminium+Sleeve	2.617	g/cc	1657.01	2197.69	cps
Spine Angle = 72.65			Density/Spine Ratio = 0.712		
	PE		NLITH	NHARD	
Magnesium	2.000	barn	2520.00	1620.00	cps
Aluminium	3.000	barn	1926.00	1699.00	cps
Aluminium+Sleeve	5.000	barn	915.00	1230.00	cps
M = 0.370			B = -0.079	R = 0.999	
	Size		Reading		
Small Ring	8.00	in	8.61	V	
Large Ring	14.30	in	12.40	V	

Neutron Calibration Report								
----------------------------	--	--	--	--	--	--	--	--

Serial Number:			AD5139					
----------------	--	--	--------	--	--	--	--	--

Tool Model:	ADMY5139	
Performed:	(Not Performed)	
Calibrator Value:	1	NAPI
Calibrator Reading:	1	cps
Sensitivity:	1	NAPI/cps

Temperature Calibration Report

Serial Number:	WithMC
Tool Model:	WMC
Performed:	Fri Apr 19 12:15:04 2019
	Reference Reading
Low Reference:	0.00 degF 0.00 degF
High Reference:	1.00 degF 1.00 degF
Gain:	1.00
Offset:	0.00
Delta Spacing	1

Inclinometer Calibration Report

Performed:	Wed May 5 19:20:48 2021				
	Low Read.	High Read.	Low Ref.	High Ref.	
X Accelerometer	205.00	1843.00	-1.00	1.00	gee
Y Accelerometer	205.00	1843.00	-1.00	1.00	gee
Z Accelerometer					gee

Gamma Ray Calibration Report

Serial Number:	WithMC
Tool Model:	WMC
Performed:	(Not Performed)
Calibrator Value:	1.0 GAPI
Background Reading:	0.0 cps
Calibrator Reading:	1.0 cps
Sensitivity:	1.0000 GAPI/cps