



MICRO LOG

Company STEWART PRODUCERS, INC.

Well WHIPPLE #1-27

Field WCV - SW

County NESS State KANSAS

Location: API # : 15-135-26216-0000

1115' FNL & 330' FEL
S/2 - SE - NE - NE

SEC 27 TWP 19S RGE 26W

Permanent Datum GROUND LEVEL Elevation 2591
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SONIC

Elevation
K.B. 2598
D.F. 2596
G.L. 2591

Date 4/7/24

Run Number TWO

Depth Driller 4640

Depth Logger 4642

Bottom Logged Interval 4626

Top Log Interval 3800

Casing Driller 8.625@217

Casing Logger 216

Bit Size 7.785

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/60

pH / Fluid Loss 10.0/8.0

Source of Sample FLOWLINE

Rm @ Meas. Temp .900@70F

Rmf @ Meas. Temp .675@70F

Rmc @ Meas. Temp 1.08@70F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .516@122F

Time Circulation Stopped 4.5 HOURS

Time Logger on Bottom 4:00 P.M.

Maximum Recorded Temperature 122F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By AARON YOUNG

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-135-26216-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
BEELER, KS. & HWY 96, 5S. ON "RD. C" TO "80TH", 1E., S. INTO




MAIN SECTION

Database File	8481pe.db
Dataset Pathname	pass6.2
Presentation Format	_micro
Dataset Creation	Sun Apr 07 17:18:38 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV	0	LTEN (lb)	5000
			0 (ft3)	10		

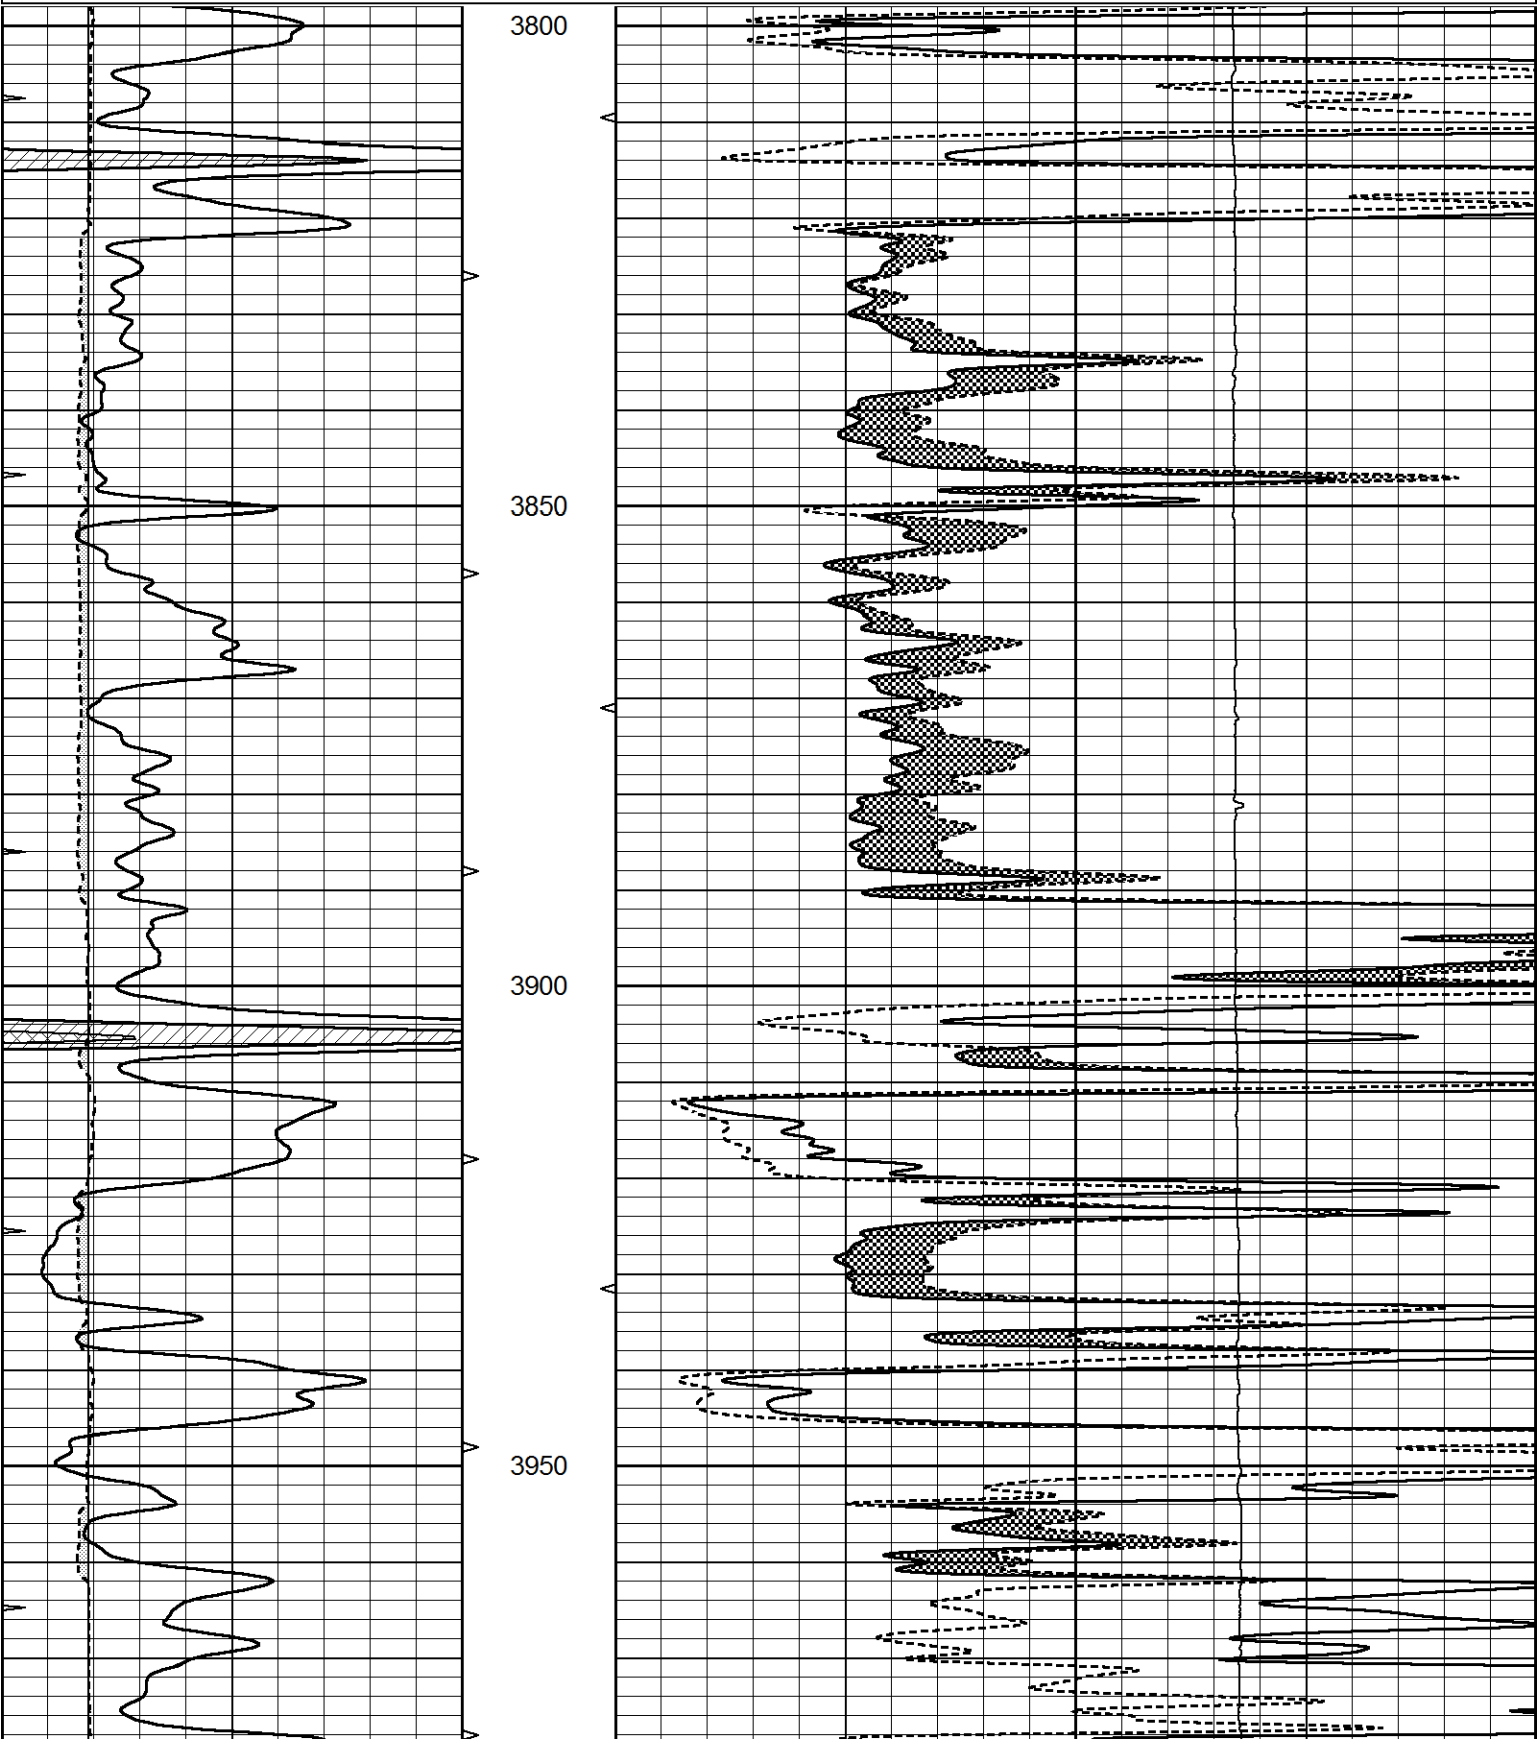

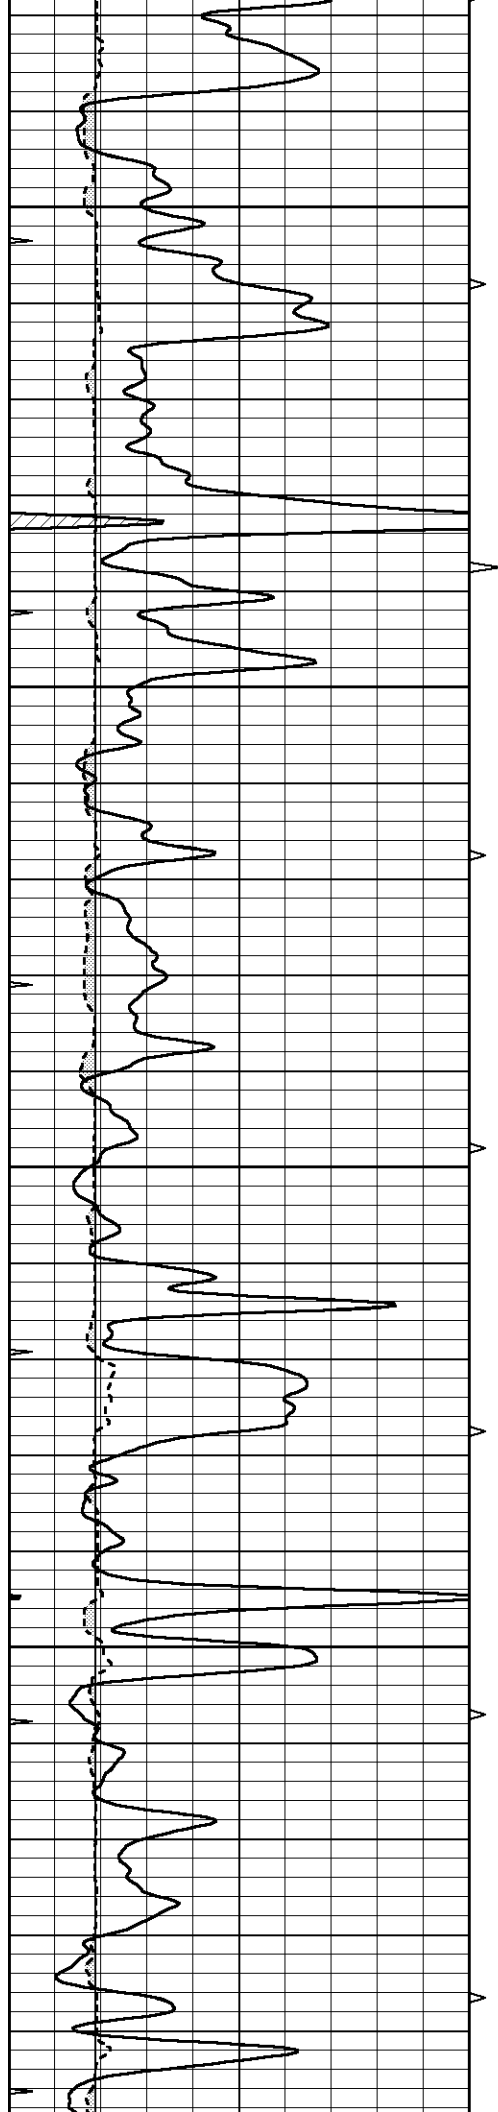



4000

4050

4100

4150

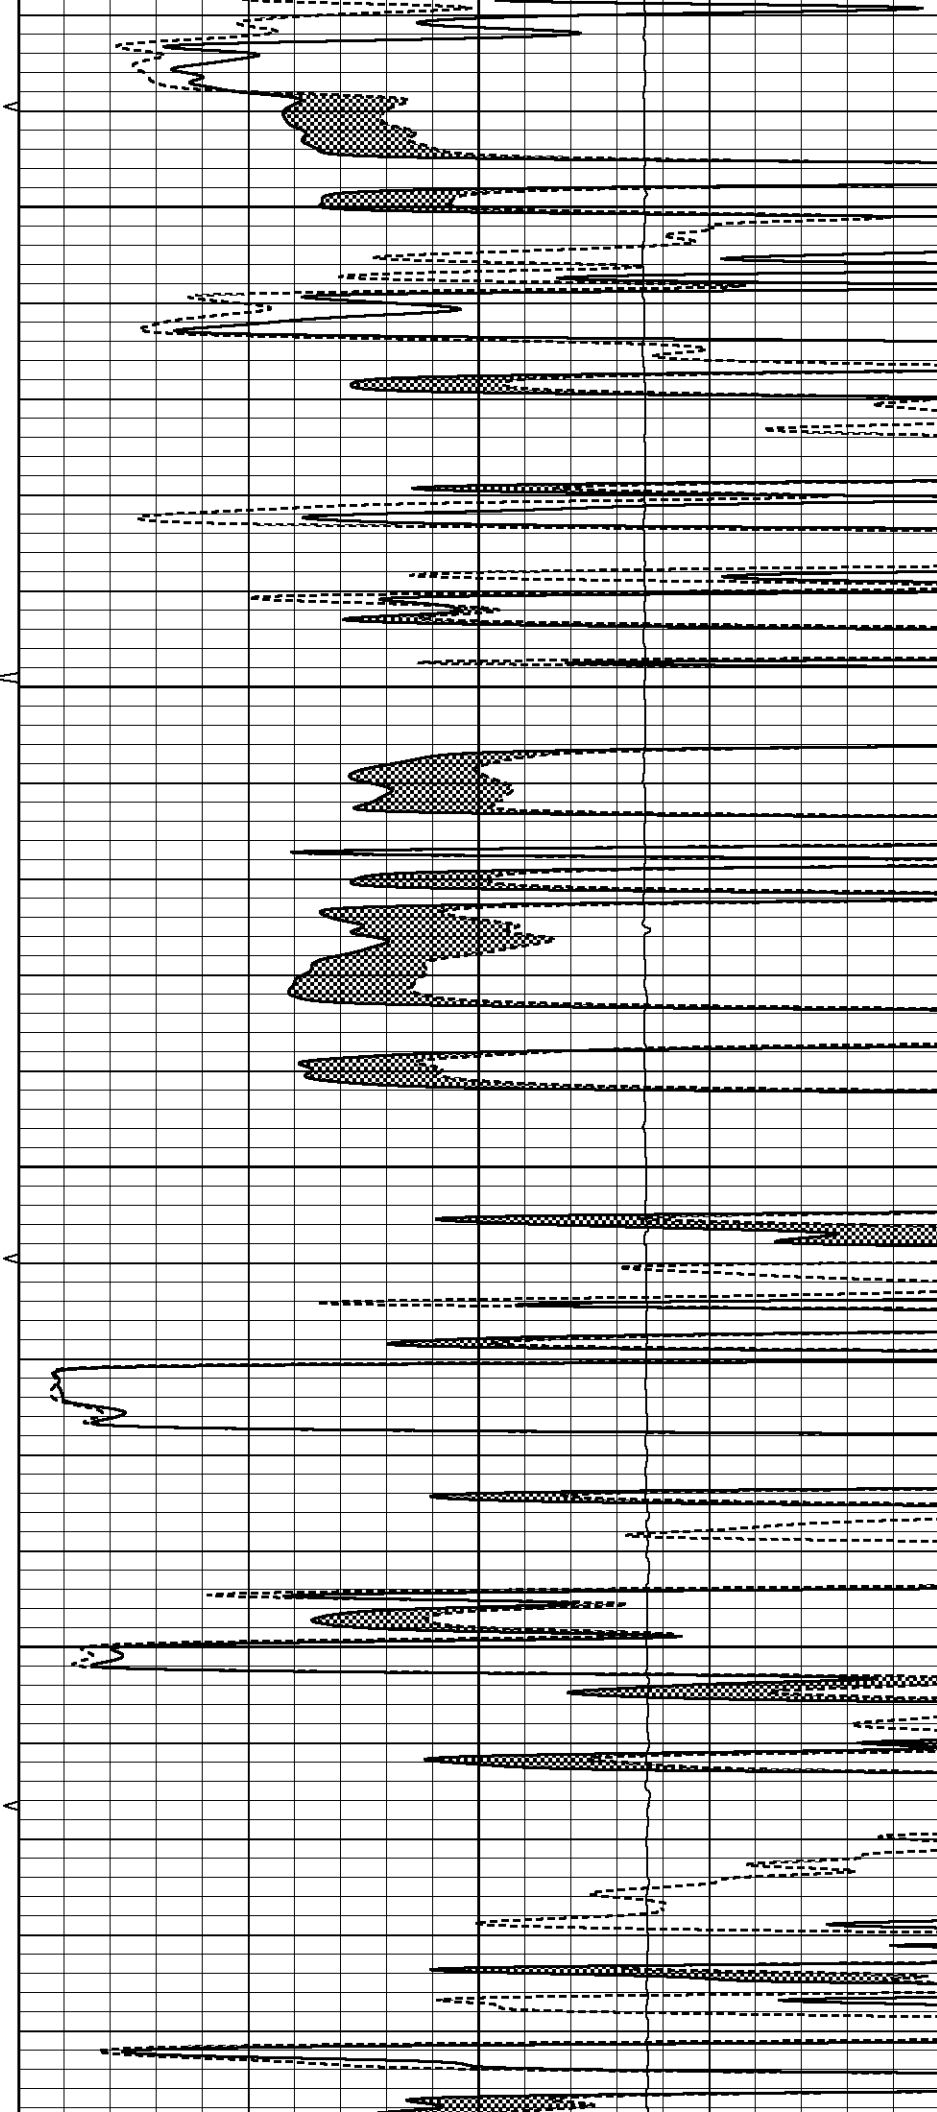

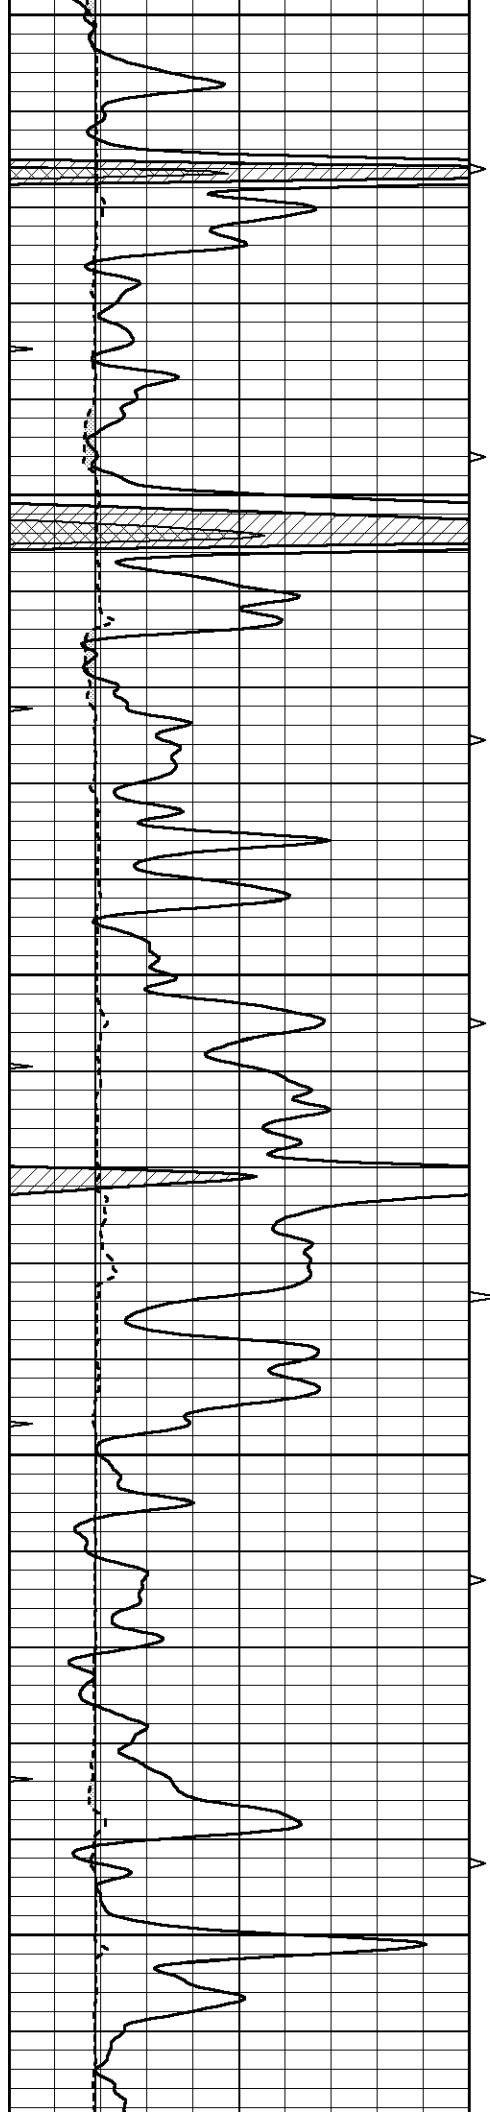


4200


4250

4300

4350

4400

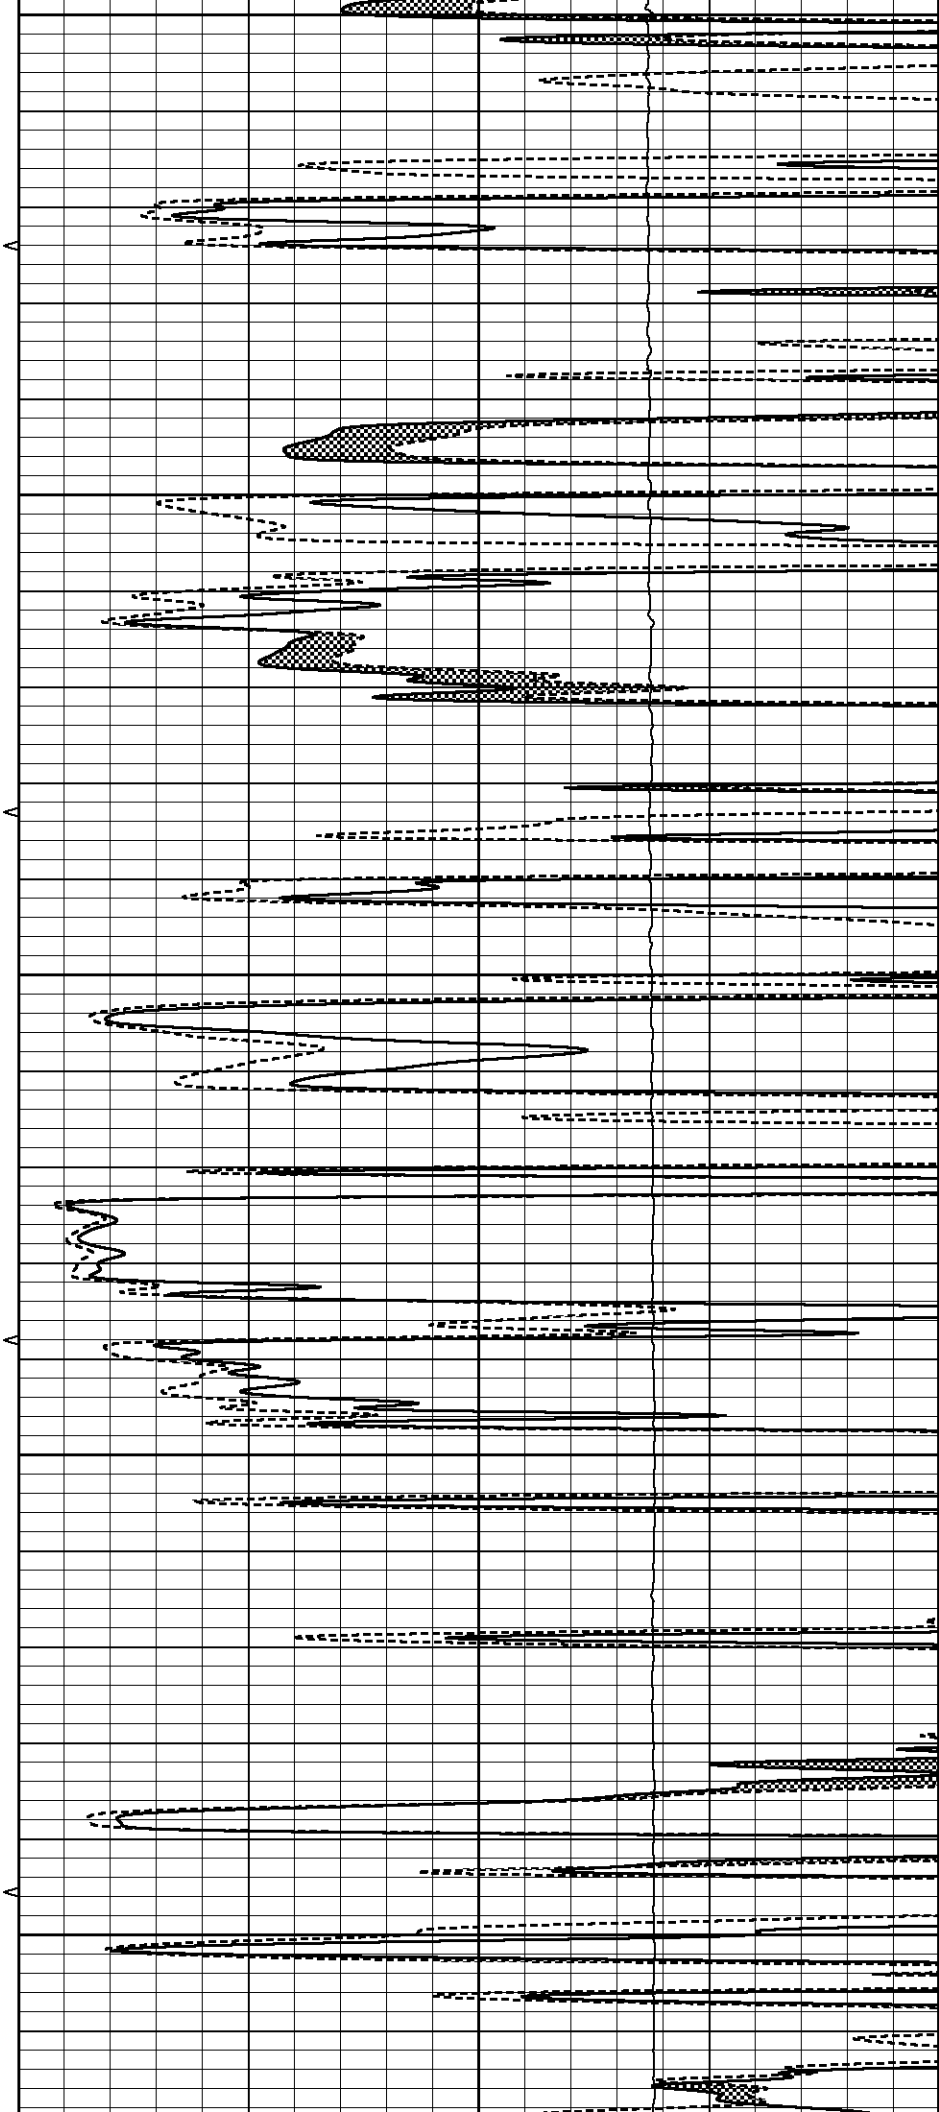

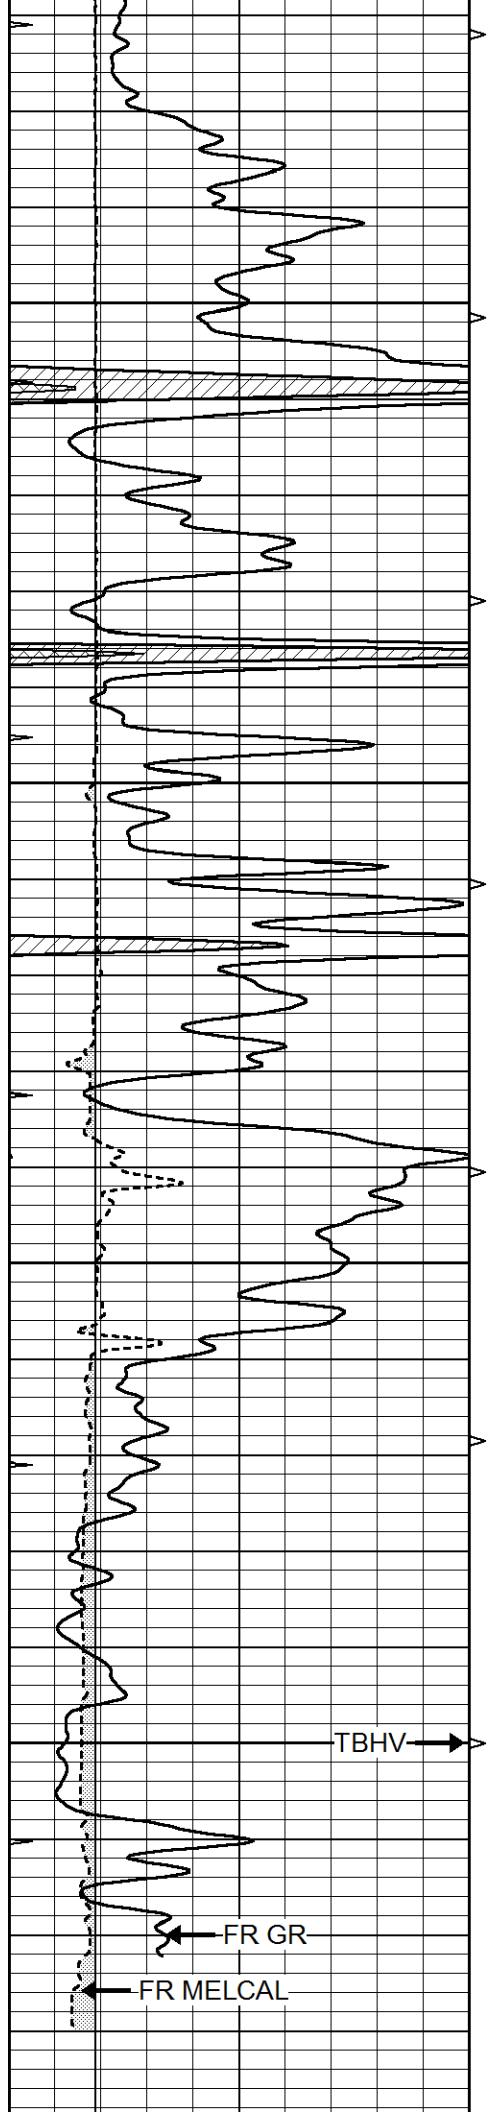

4450

4500


4550

5.5" ABHV

TBHV → 4600


← FR GR

← FR MELCAL

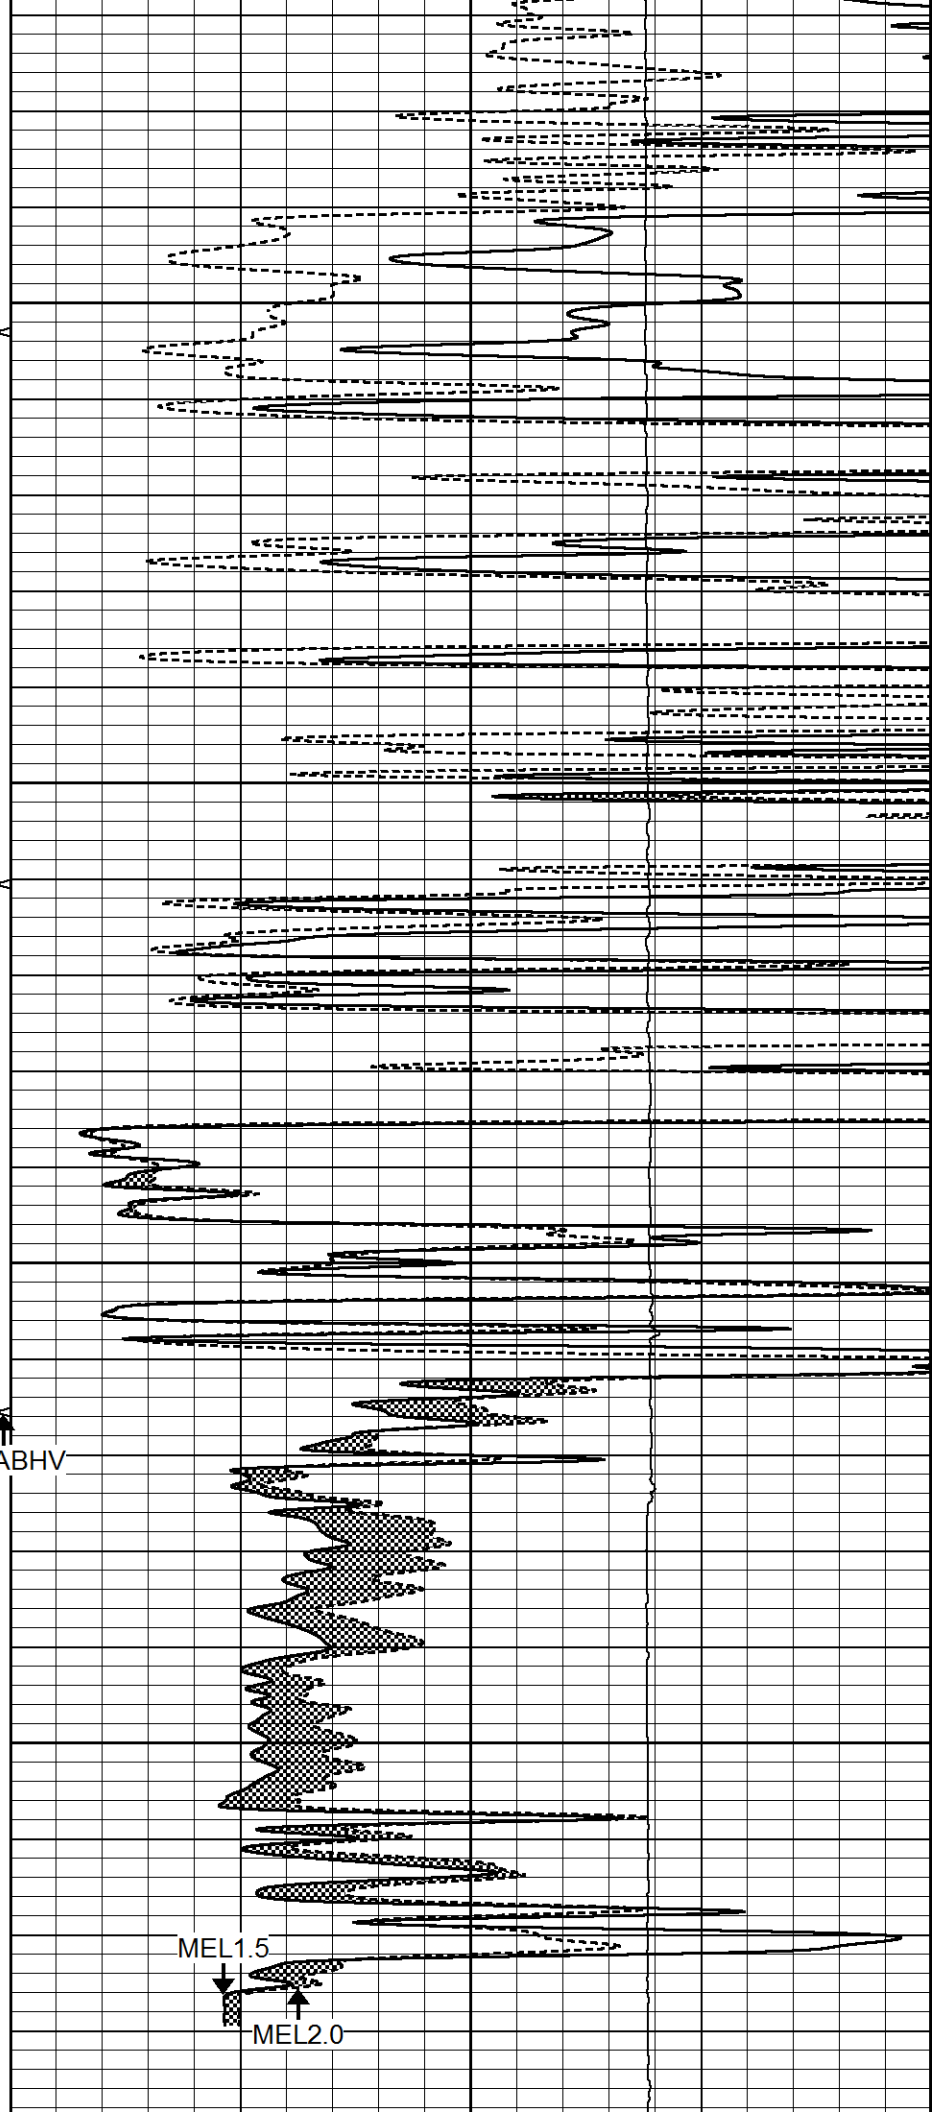

MEL1.5

MEL2.0

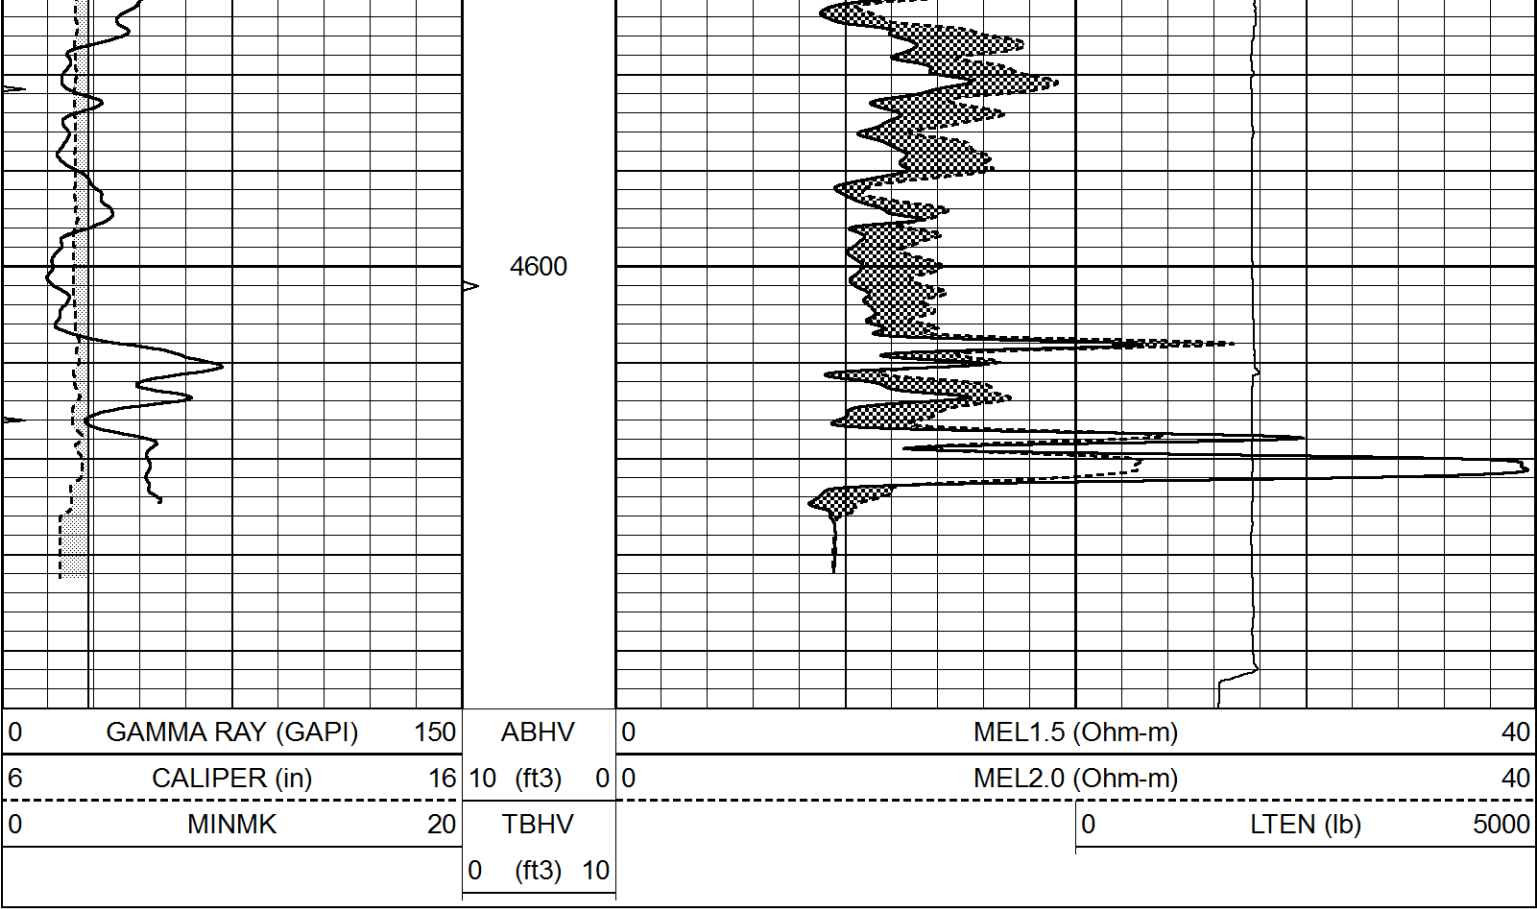

Calibration Report				
Database File	8481pe.db			
Dataset Pathname	pass6.2			
Dataset Creation	Sun Apr 07 17:18:38 2024			
MICRO Calibration Report				
Serial Number:	070910			
Tool Model:	ProbeN			
Performed:	Mon Apr 01 23:06:44 2024			
Caliper Calibration:	Gain=3.390	Offset=2.441		
	Low Cal	High Cal		
References	8.000	16.000		
Readings	1.640	4.000		
1.5" Calibration:	Gain=60.000	Offset=-2.000		
	Low Cal	High Cal		
References	0.000	20.000		
Readings	0.000	1.216		
2" Calibration:	Gain=65.000	Offset=-2.000		
	Low Cal	High Cal		
References	0.000	20.000		
Readings	0.002	1.053		
Gamma Ray Calibration Report				
Serial Number:	070559			
Tool Model:	OPEN_GR			
Performed:	Sun Mar 31 16:20:41 2024			
Calibrator Value:	1.0	GAPI		

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3000	GAPI/cps