



DUAL INDUCTION LOG

Company SHELBY RESOURCES, LLC.

Well ROCKY #1-26

Field INGRAM

County PRATT State KANSAS

Location: API # : 15-151-22553-0000
933' FSL & 605' FWL

Other Services
CDL/CNL/PE
MEL/SONIC

SEC 26 TWP 28S RGE 14W

Permanent Datum GROUND LEVEL Elevation 1962
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 1974
D.F. 1972
G.L. 1962

Date 8/20/22

Run Number ONE

Depth Driller 4793

Depth Logger 4794

Bottom Logged Interval 4792

Top Log Interval 00

Casing Driller 8 5/8" @ 826'

Casing Logger 826

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/55

pH / Fluid Loss 9.5/9.6

Source of Sample FLOWLINE

Rm @ Meas. Temp .600 @ 80F

Rmf @ Meas. Temp .450 @ 80F

Rmc @ Meas. Temp .720 @ 80F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .390 @ 123F

Time Circulation Stopped 2.5 HOURS

Time Logger on Bottom 4:30 A.M.

Maximum Recorded Temperature 123F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By JEREMY SCHWARTZ

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-151-22553-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
PRATT, KS., 5S. ON HWY 281 TO "50TH ST.", 5W., N. INTO




MAIN SECTION

Database File	6907pe.db
Dataset Pathname	pass3.1M
Presentation Format	_dil2
Dataset Creation	Sat Aug 20 06:34:09 2022
Charted by	Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
0	RWA (Ohm-m)	1	0	RILD (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

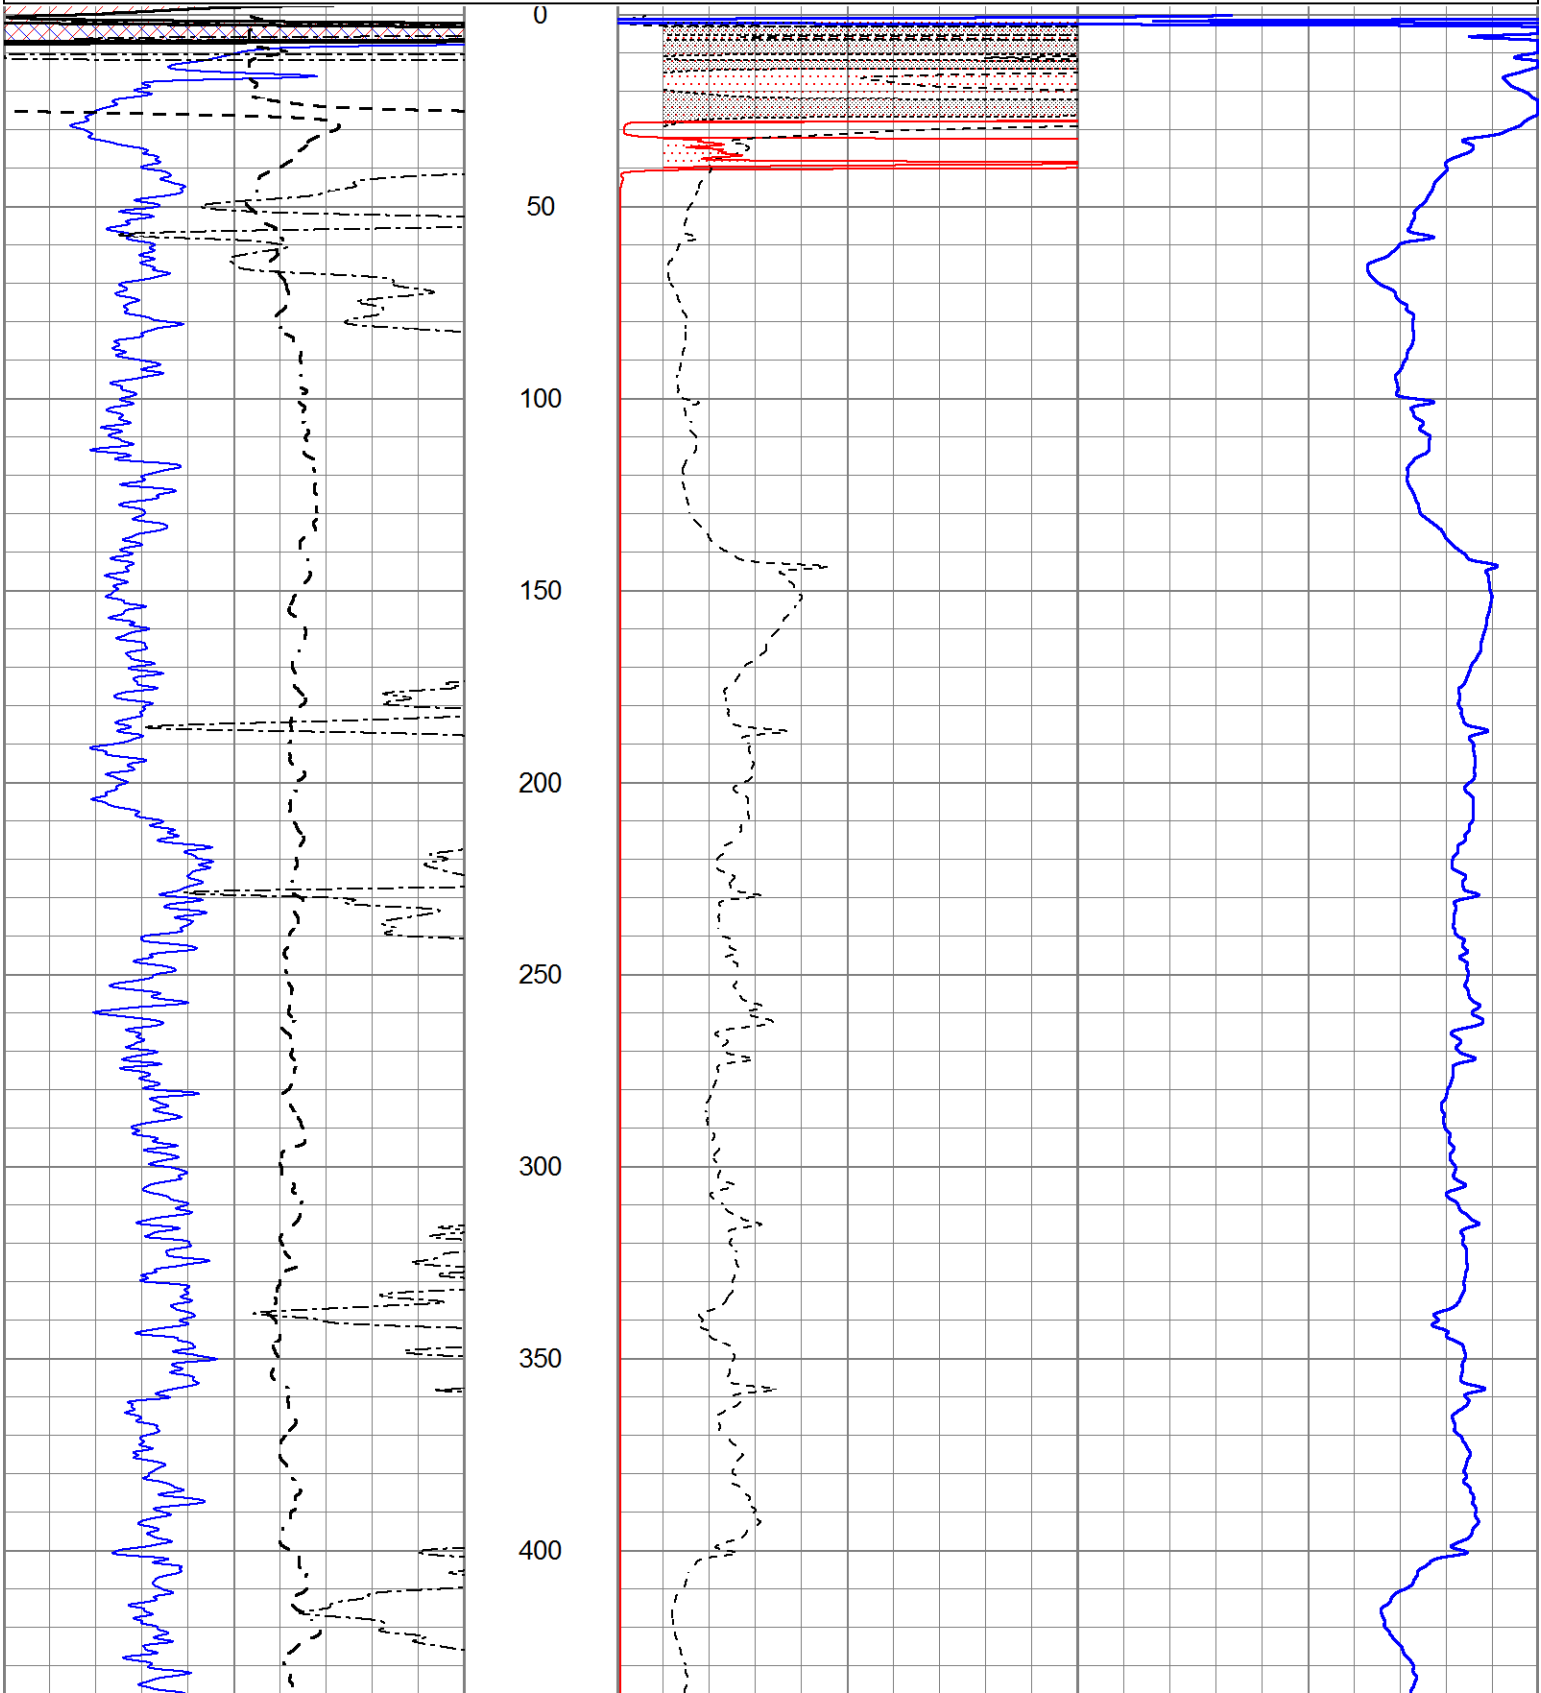

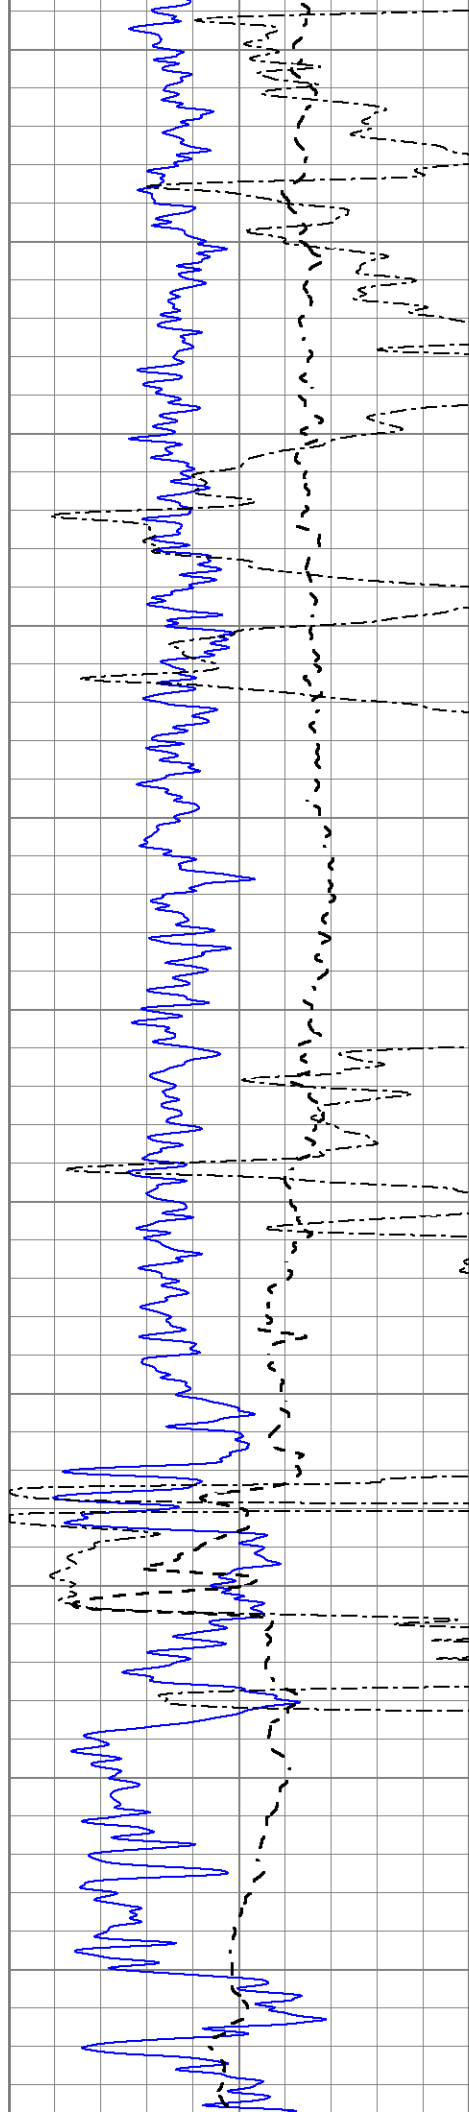

450

500

550

600

650

700



750



800


850

900

950

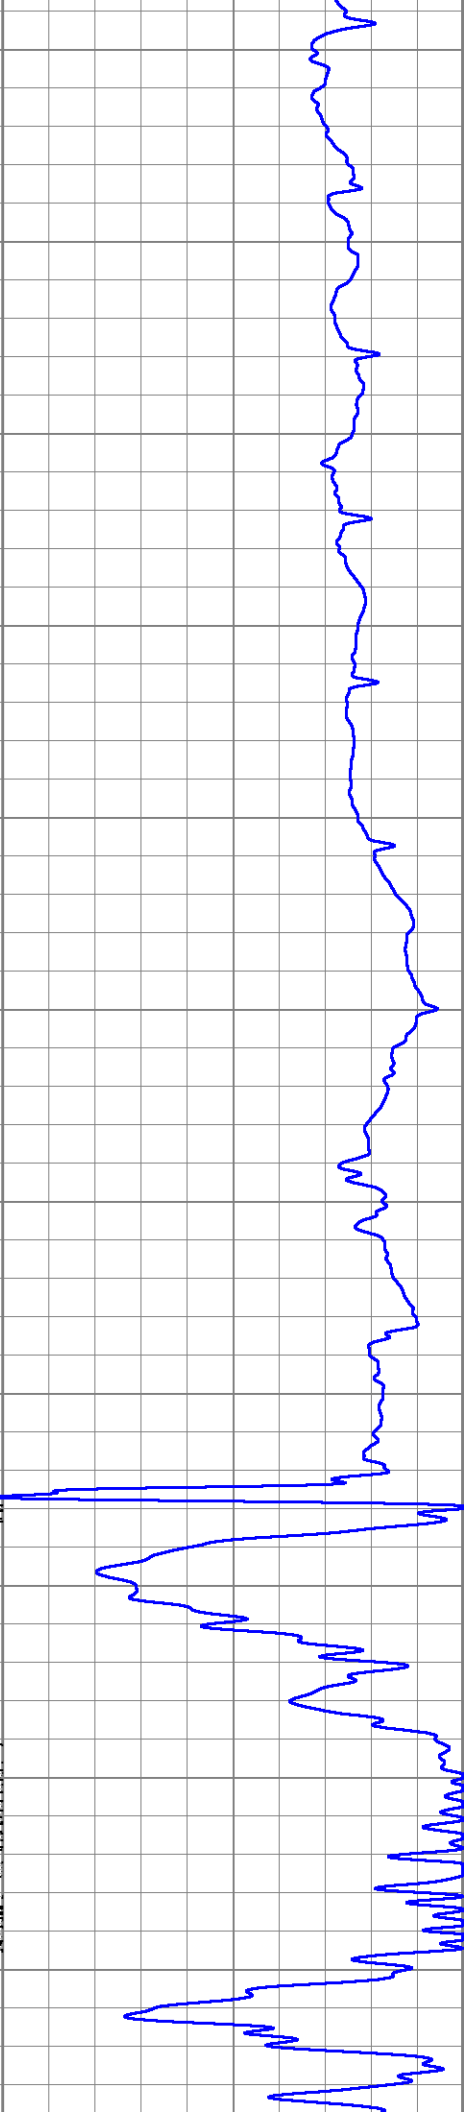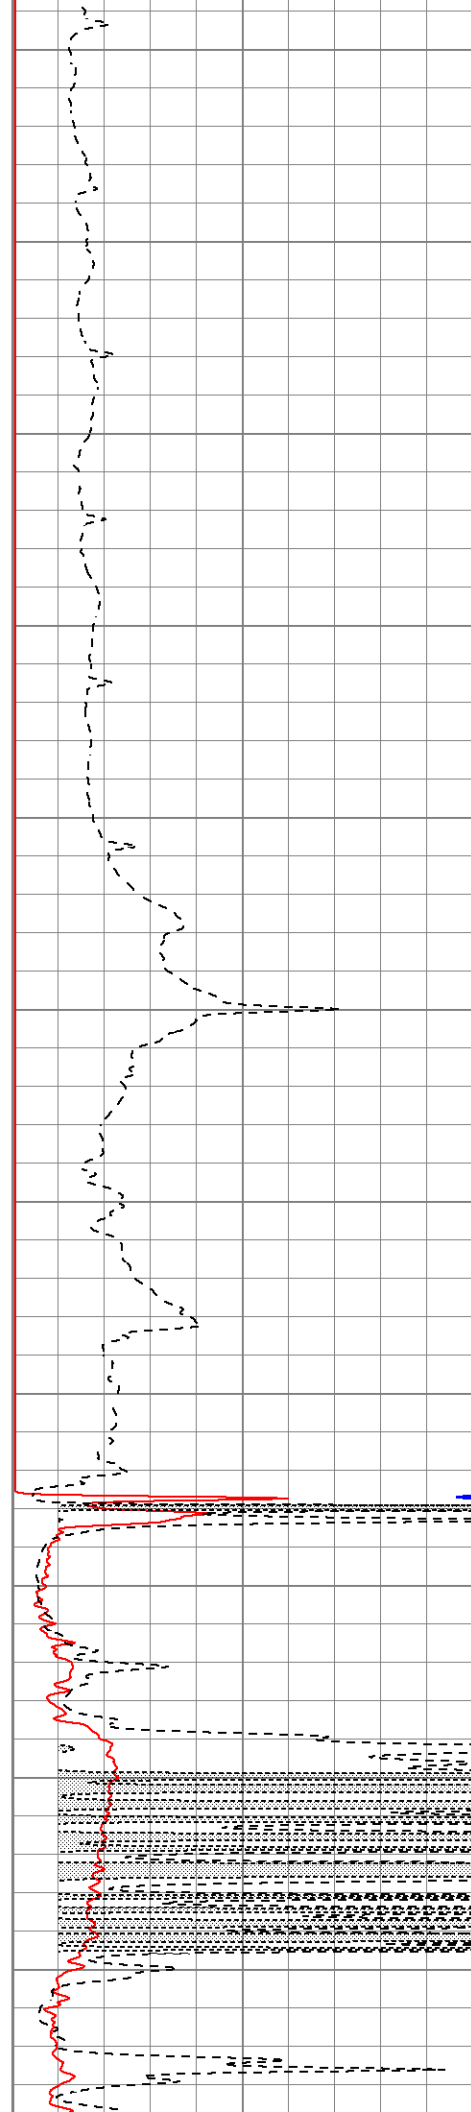

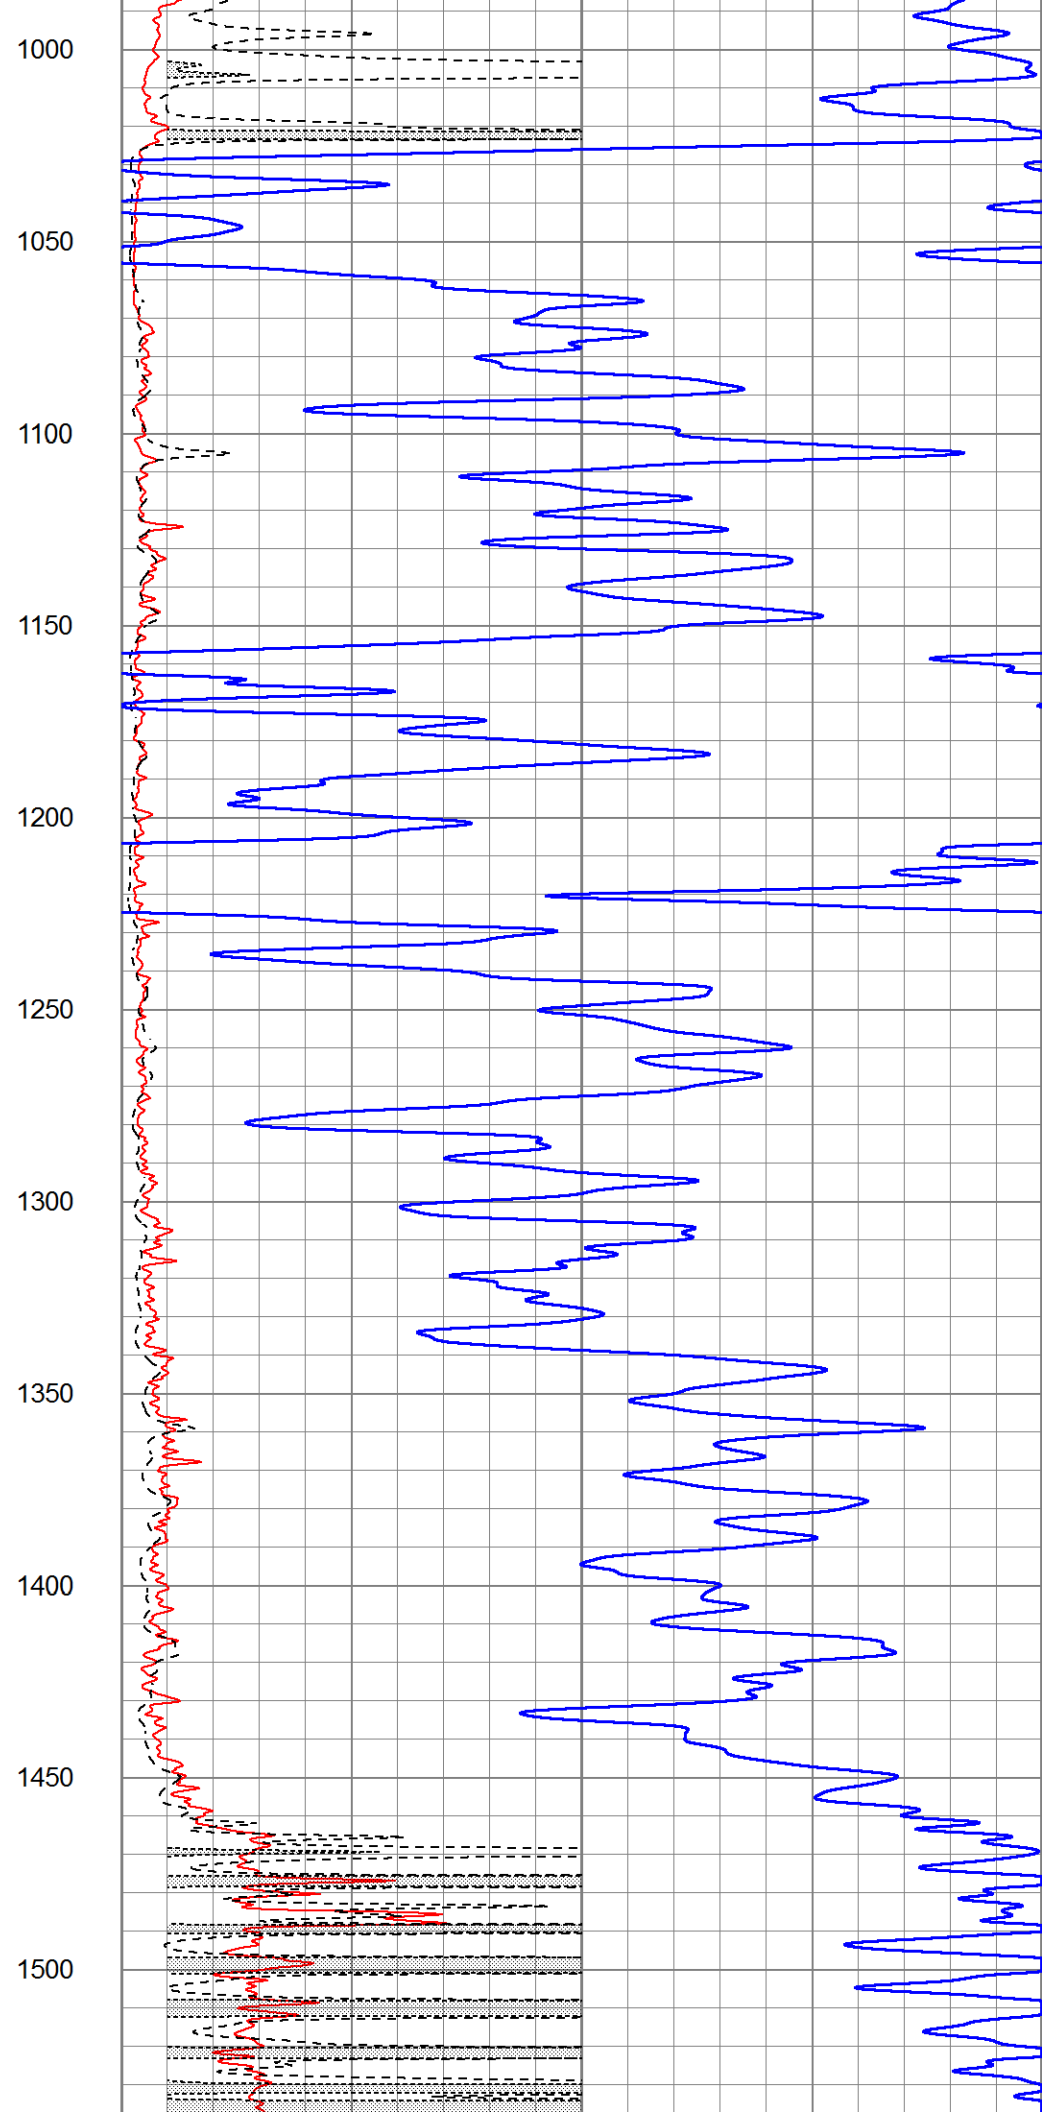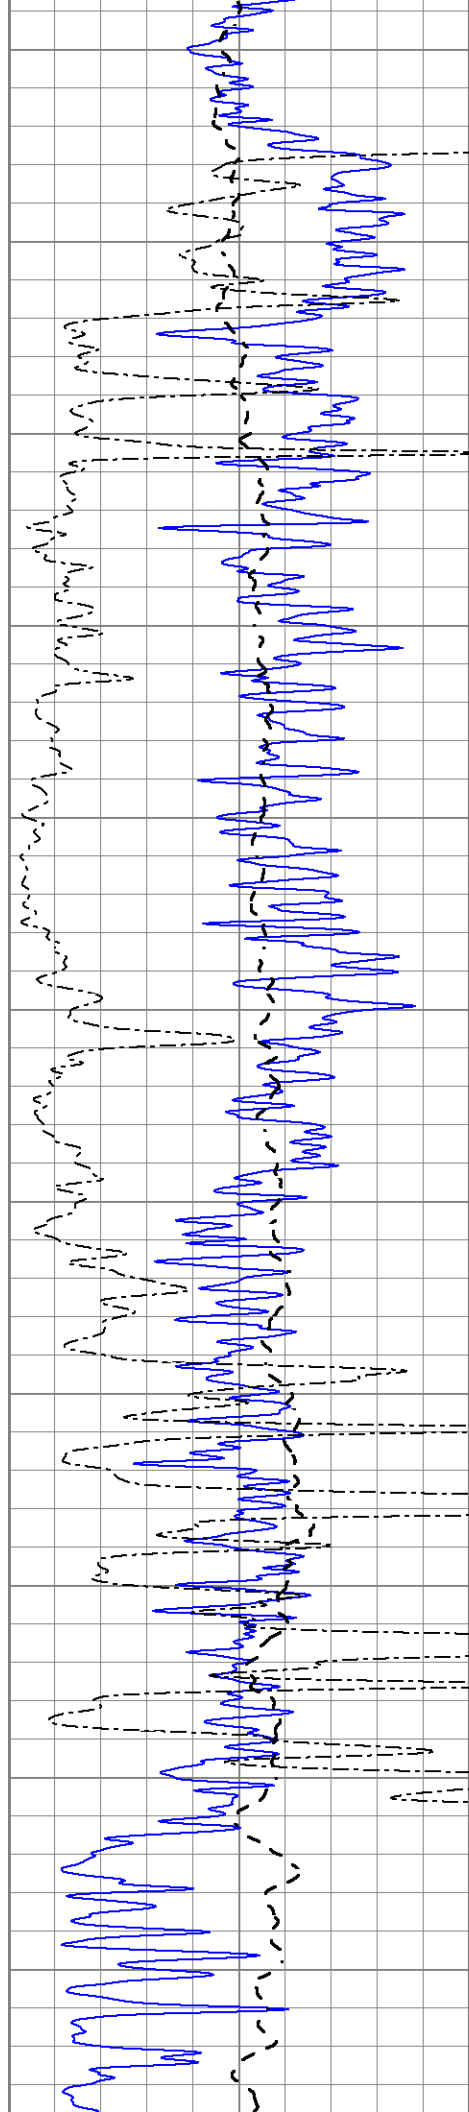

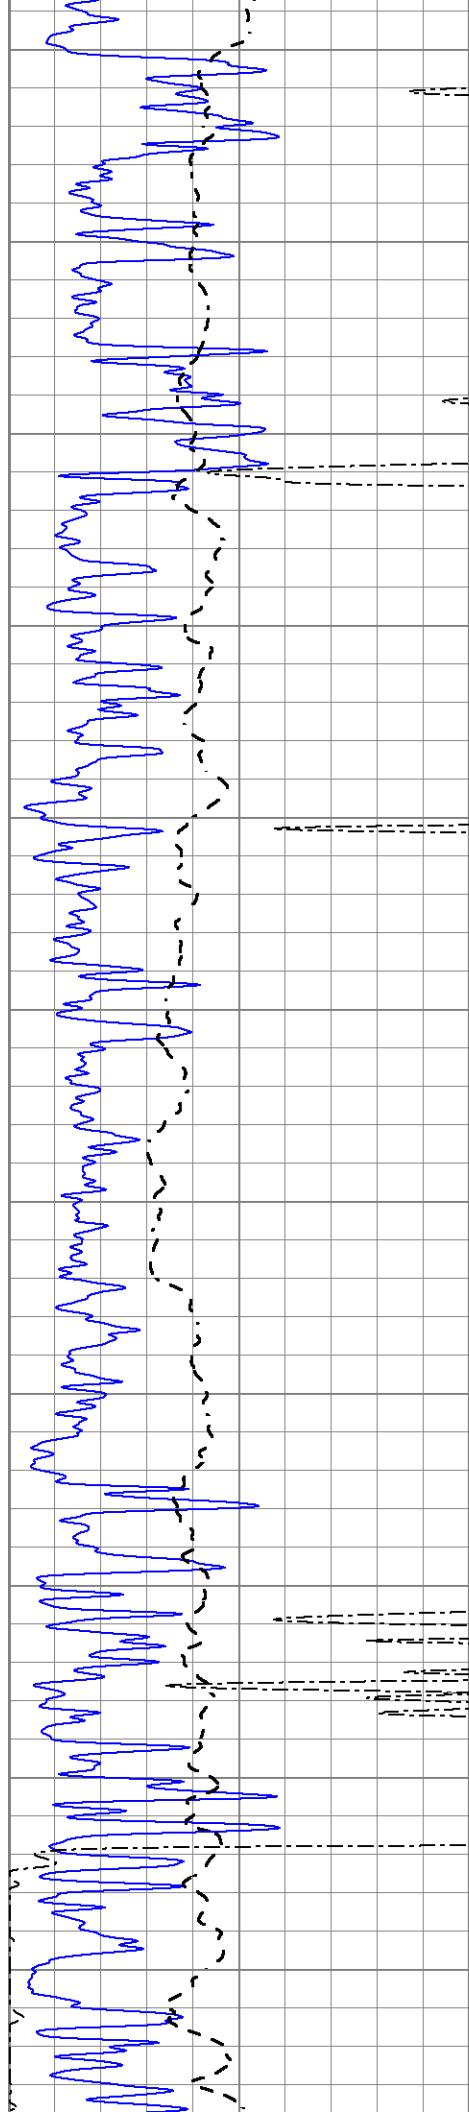

1550

1600

1650

1700

1750

1800



1850



1900



1950


2000

2050

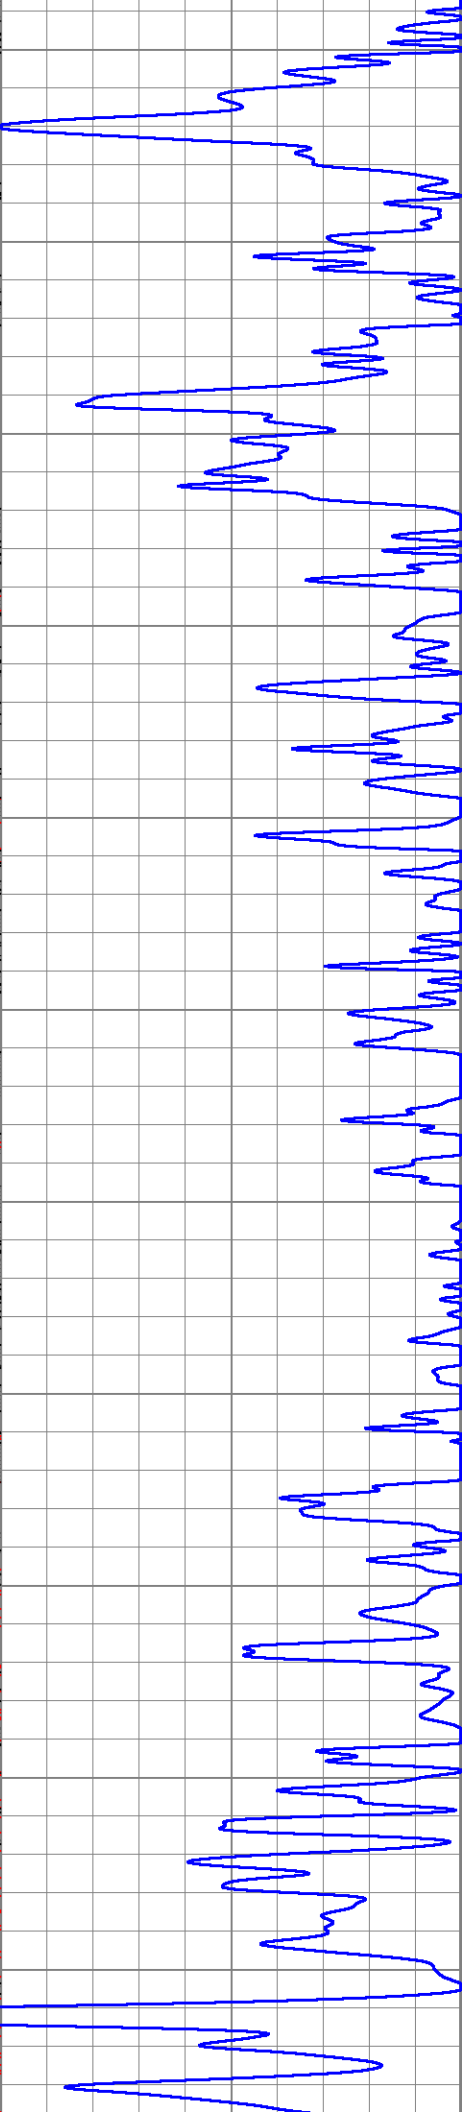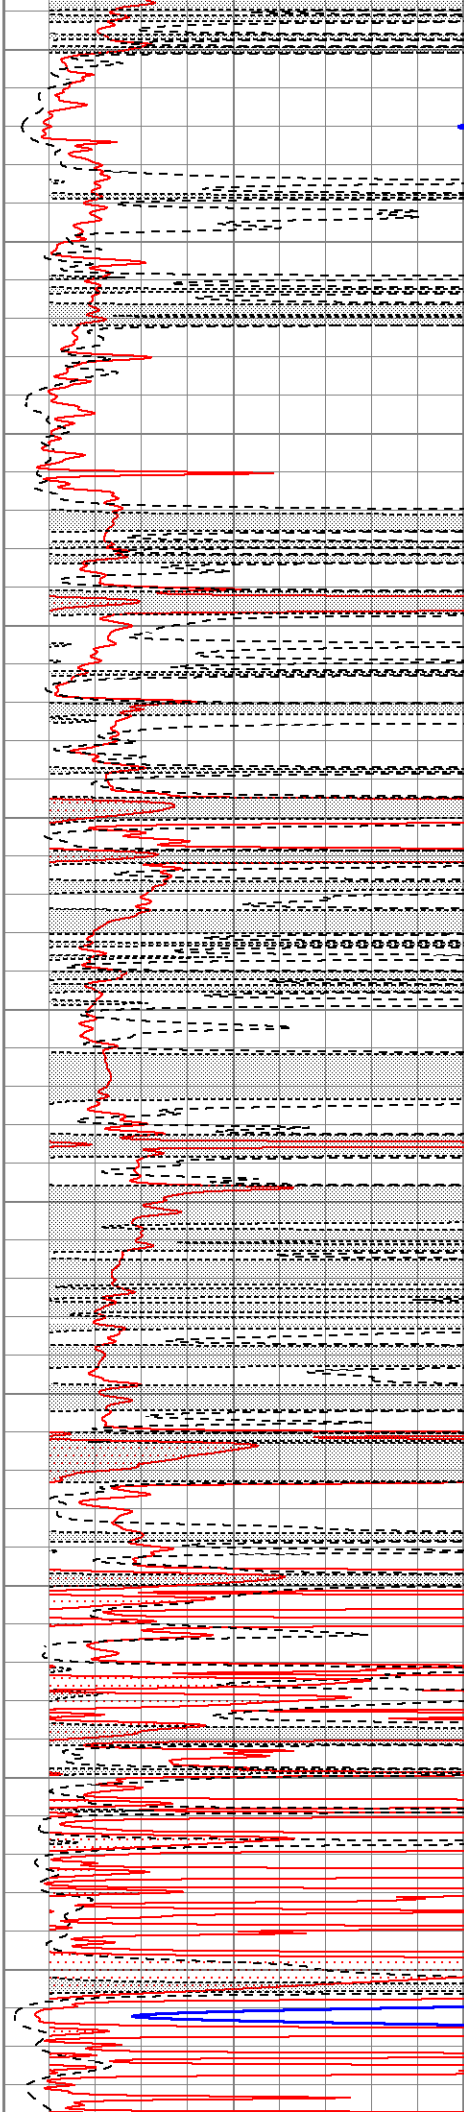

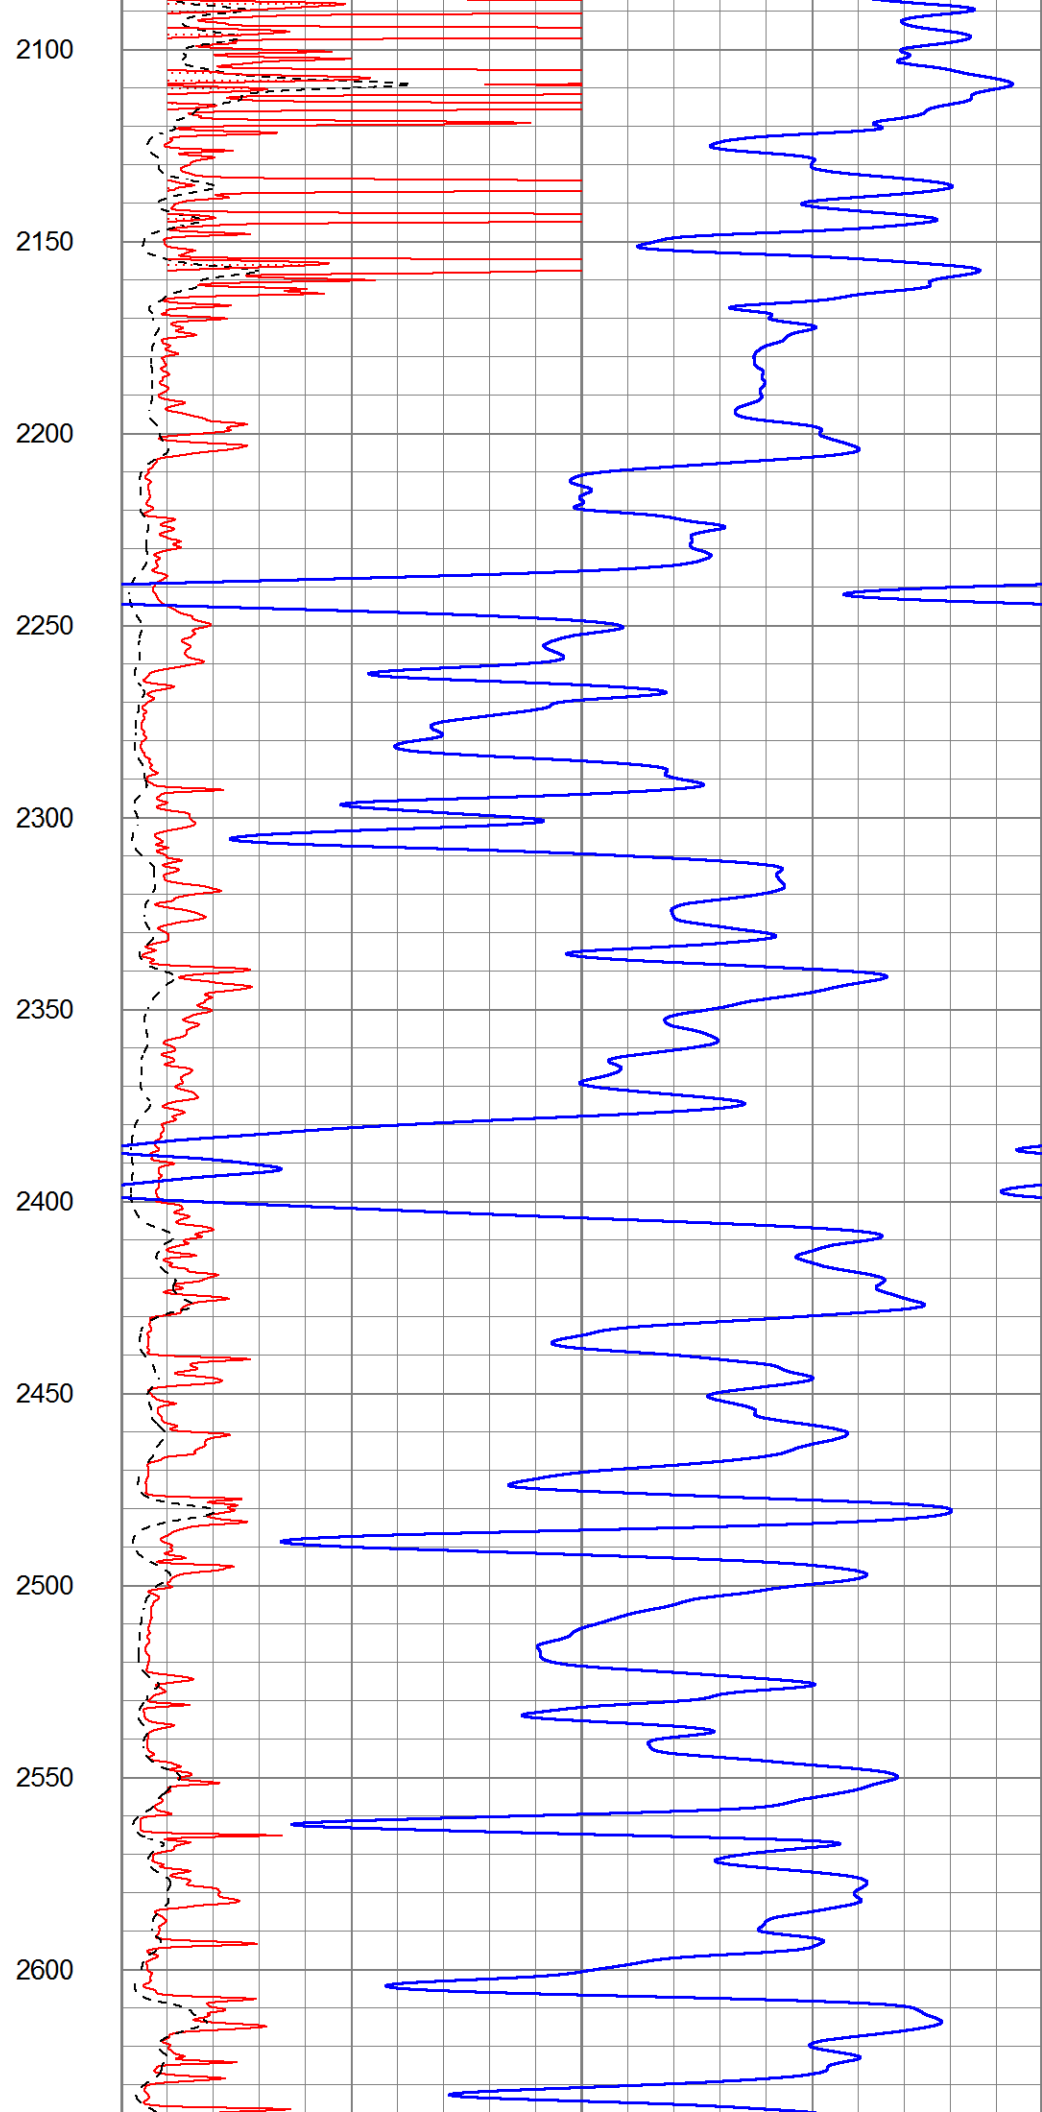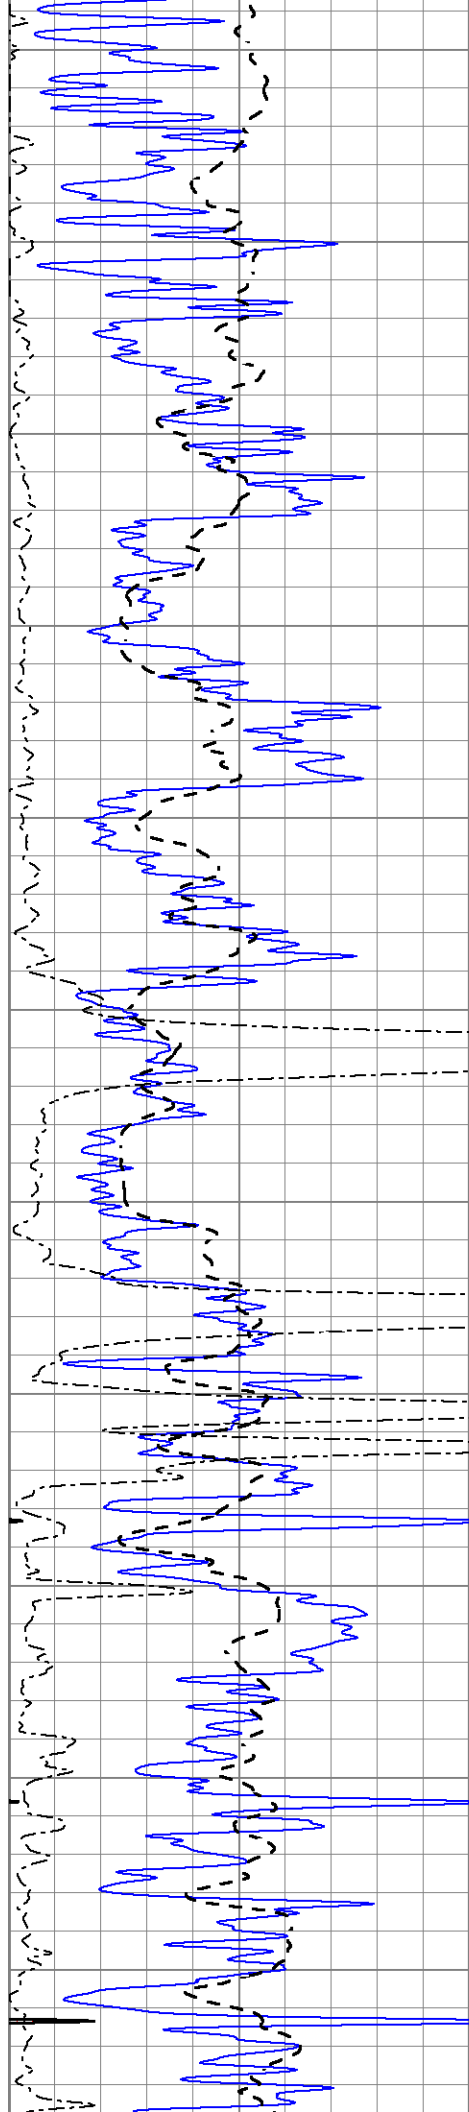

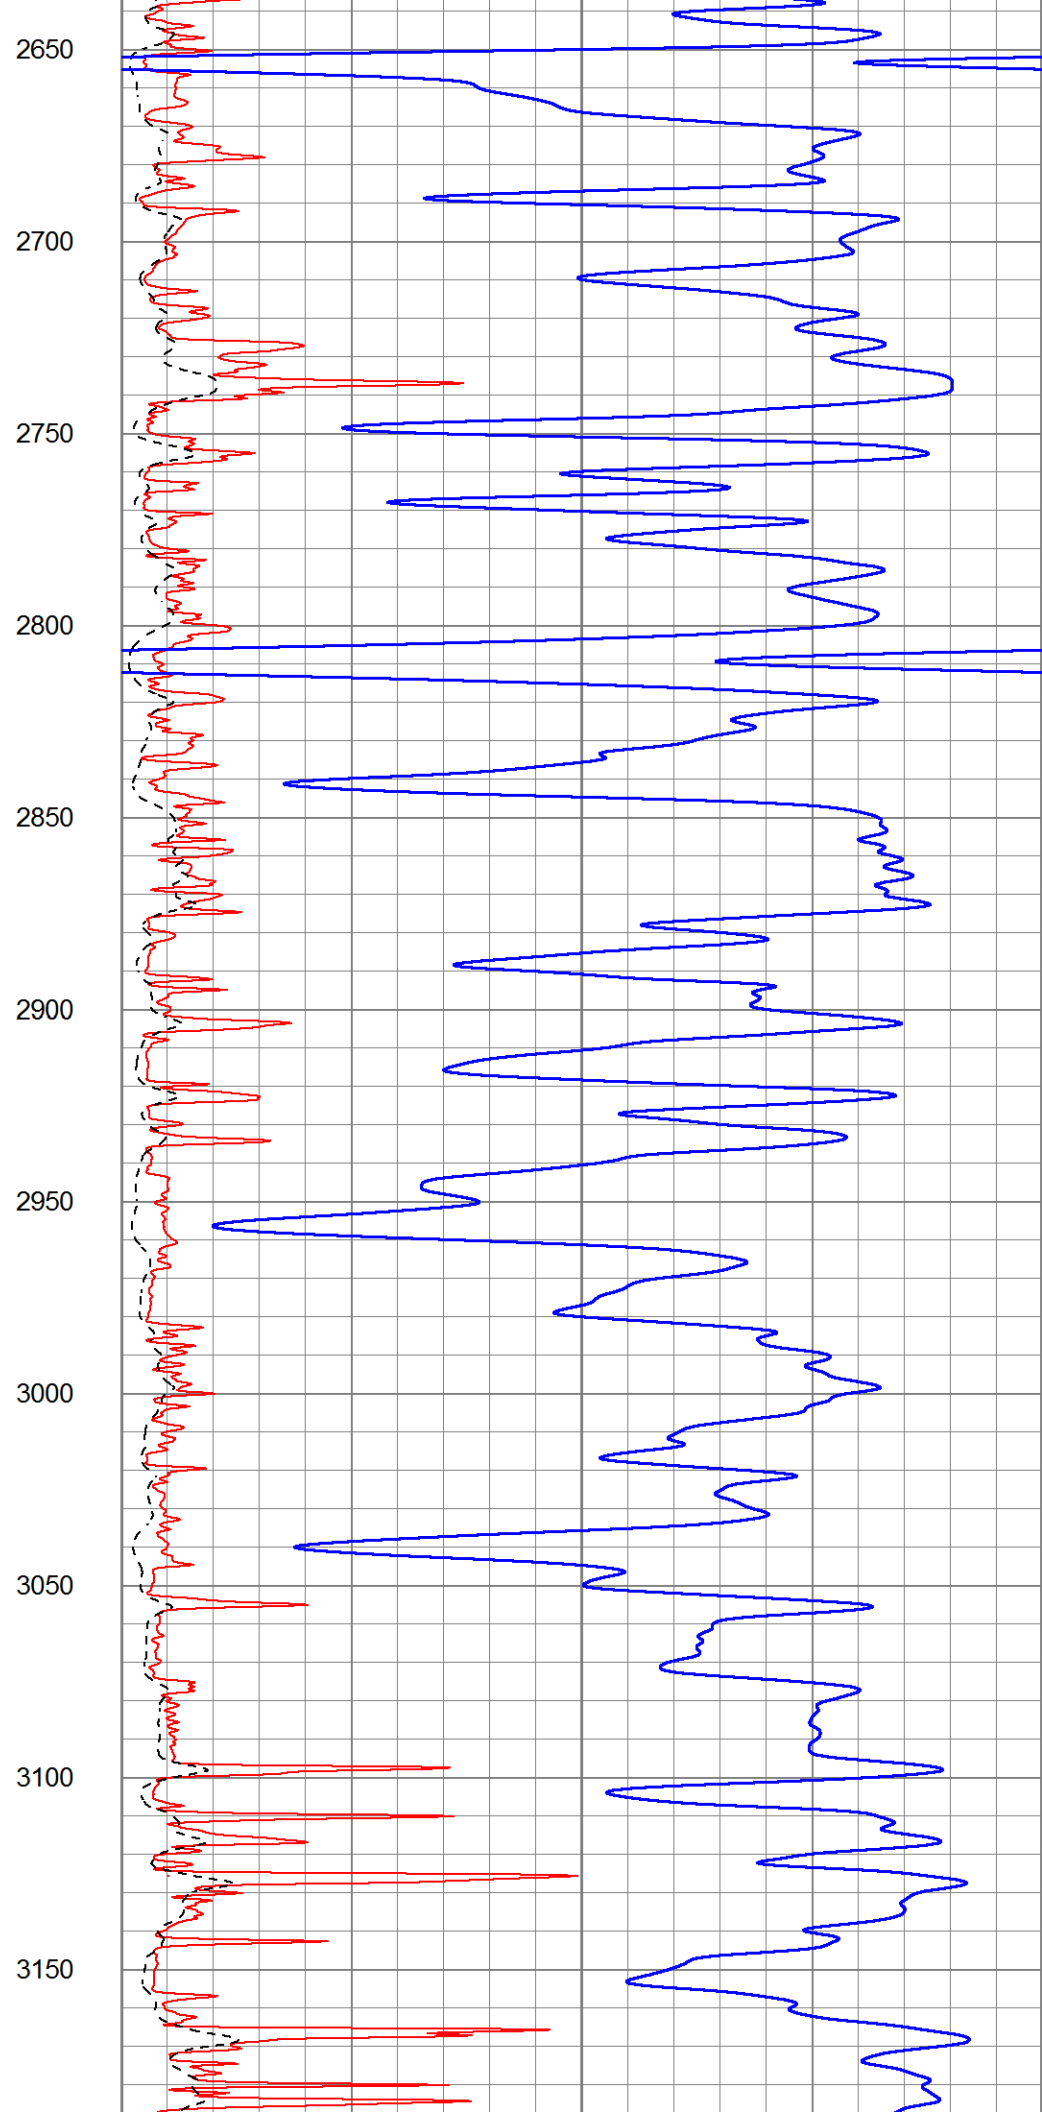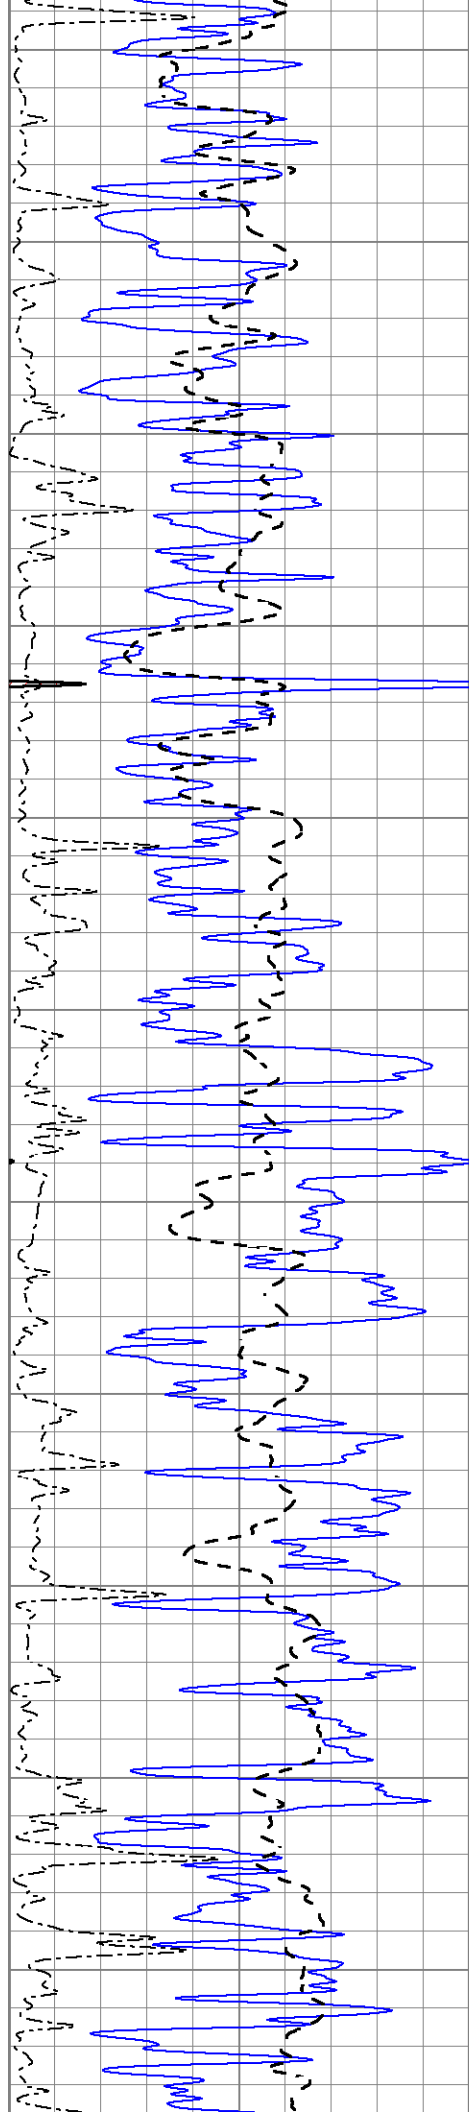

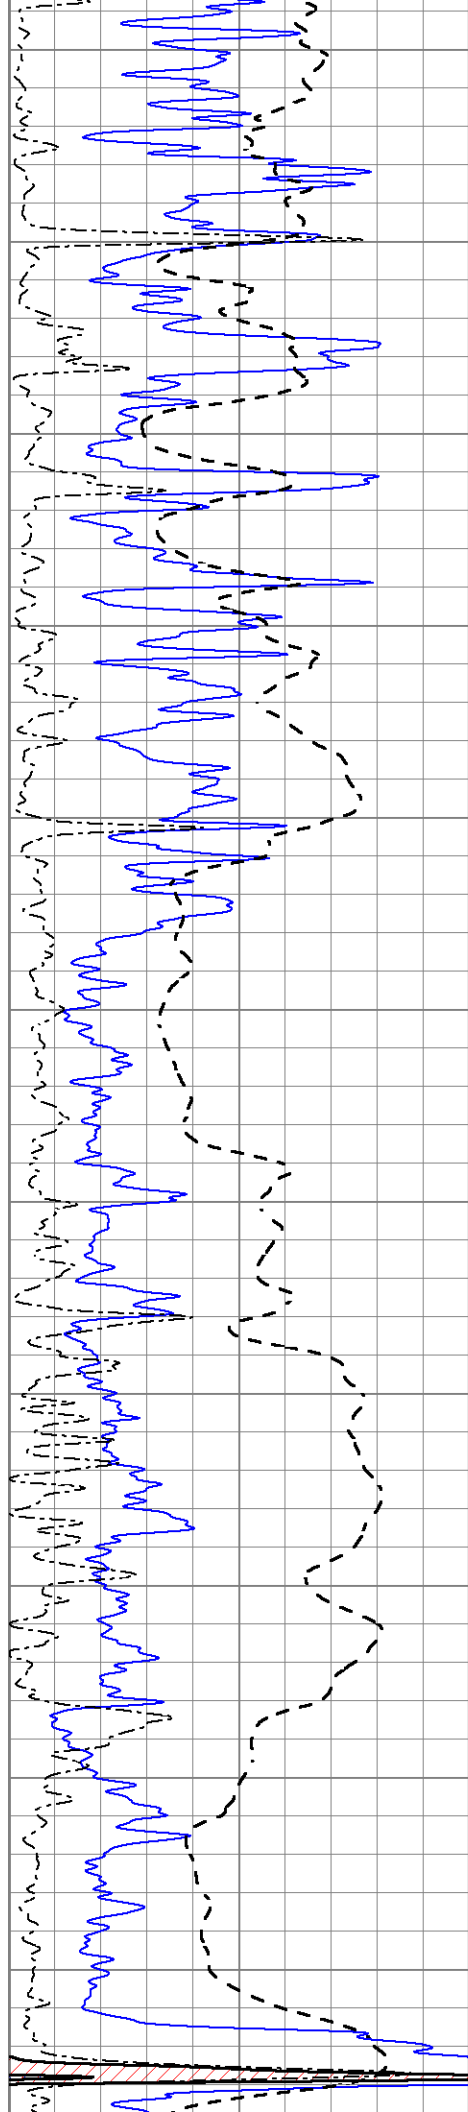

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

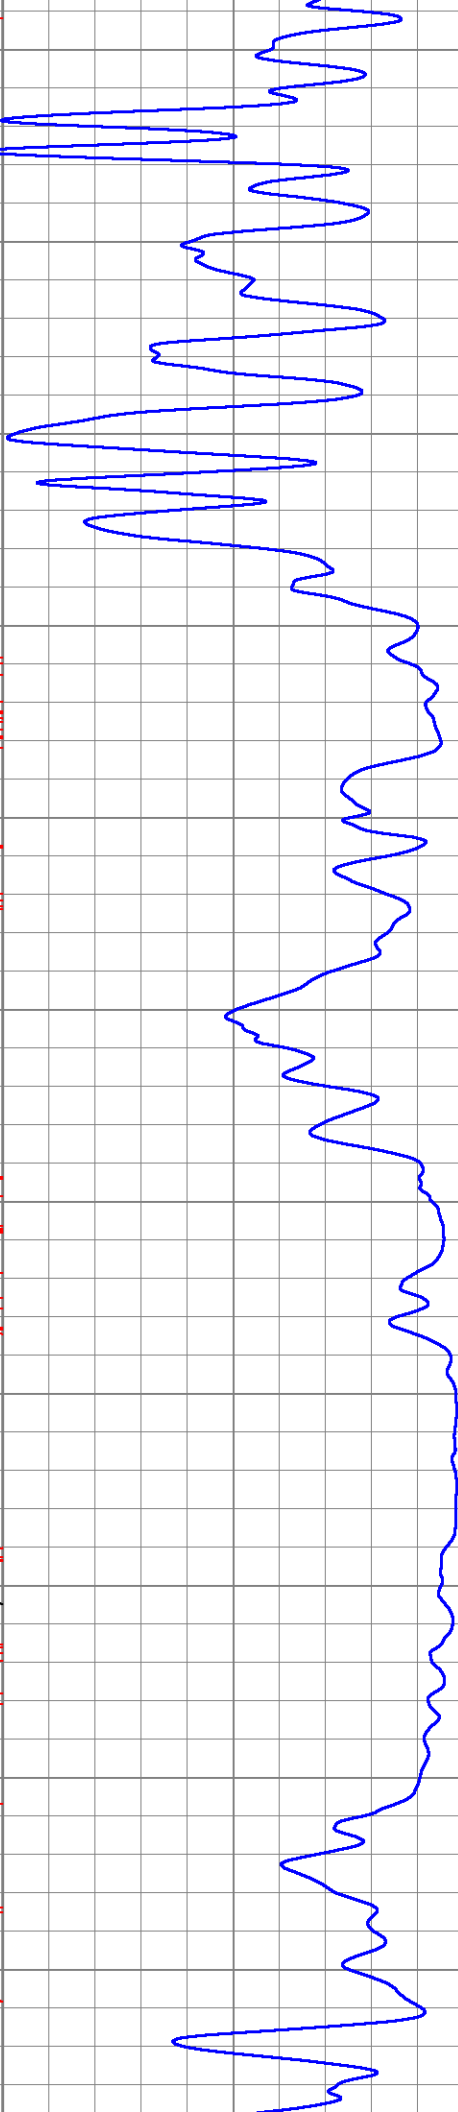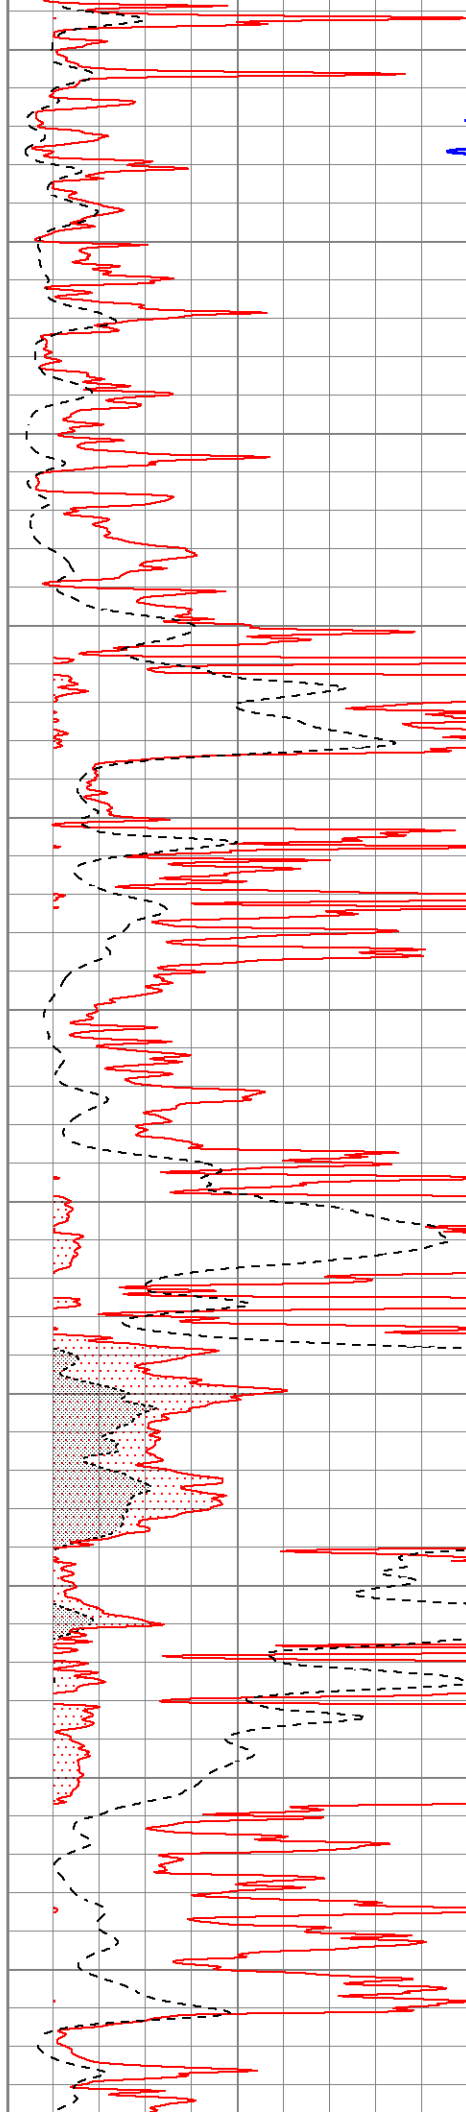

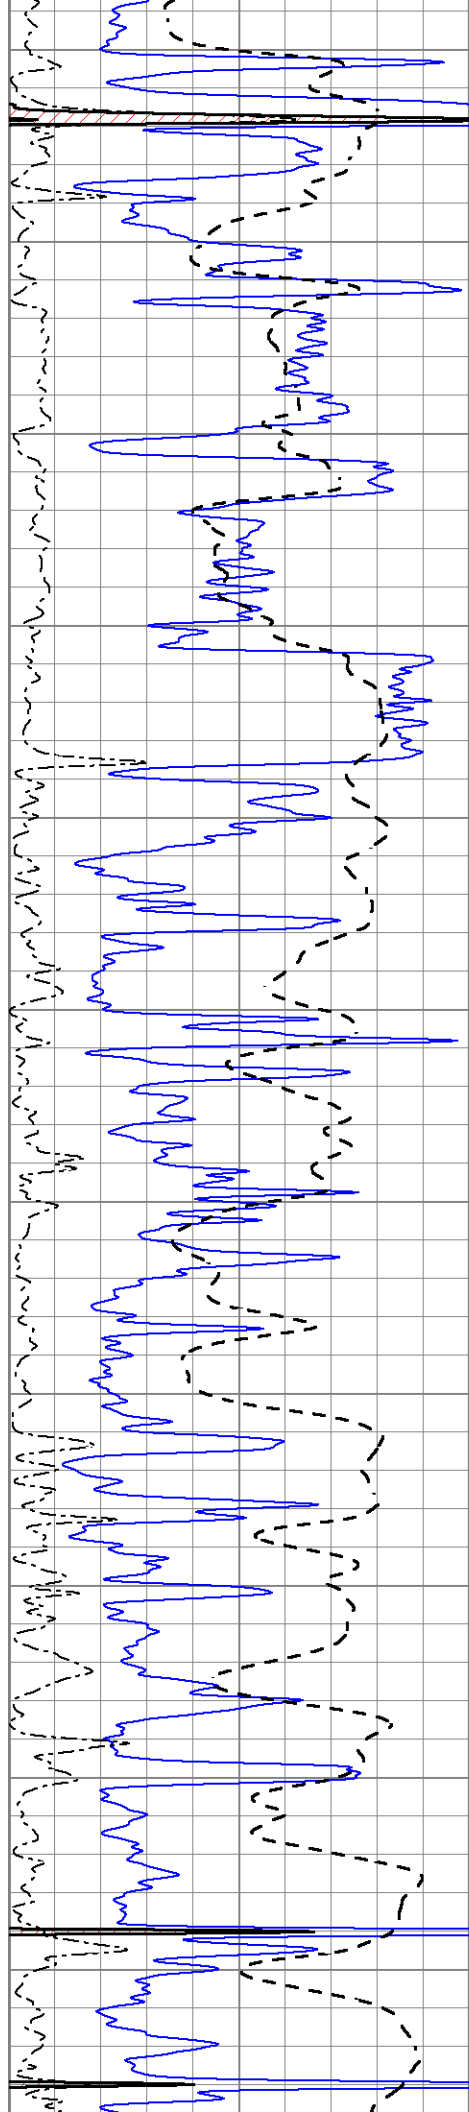

3750

3800

3850

3900

3950

4000



4050


4100

4150


4200

4250

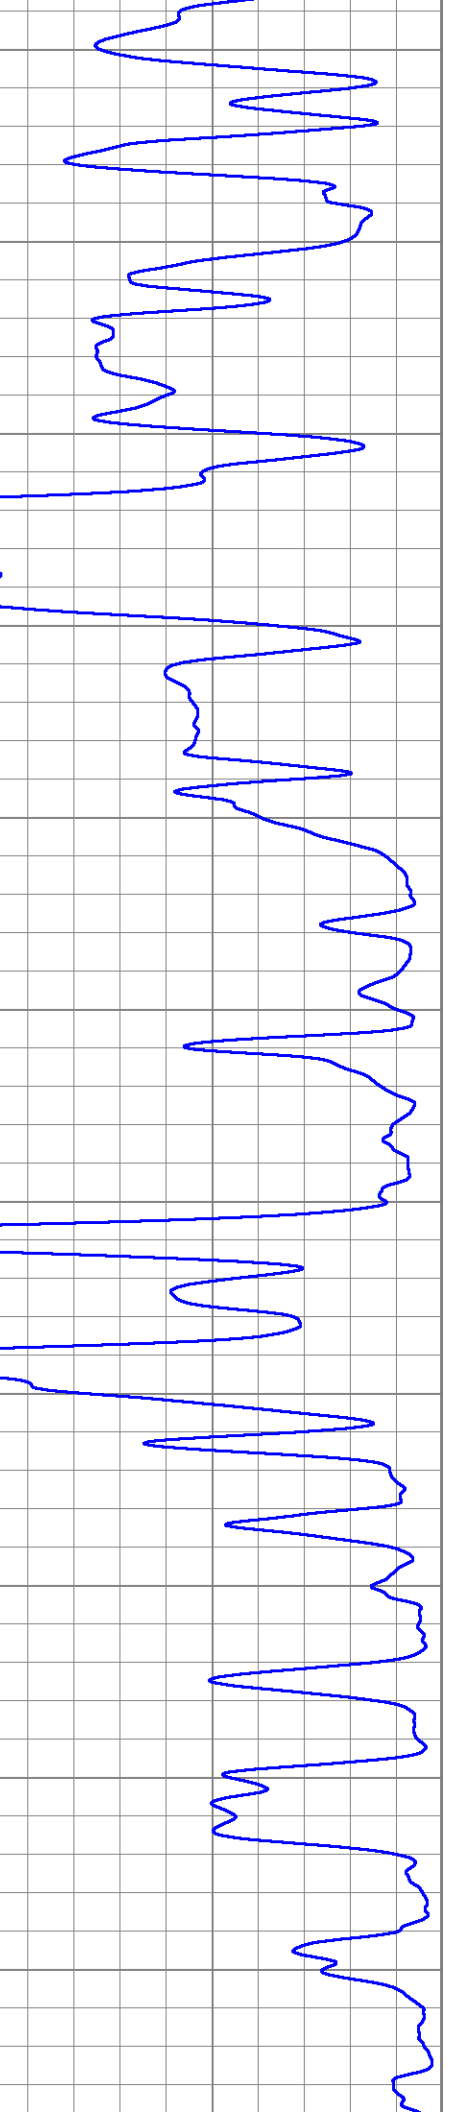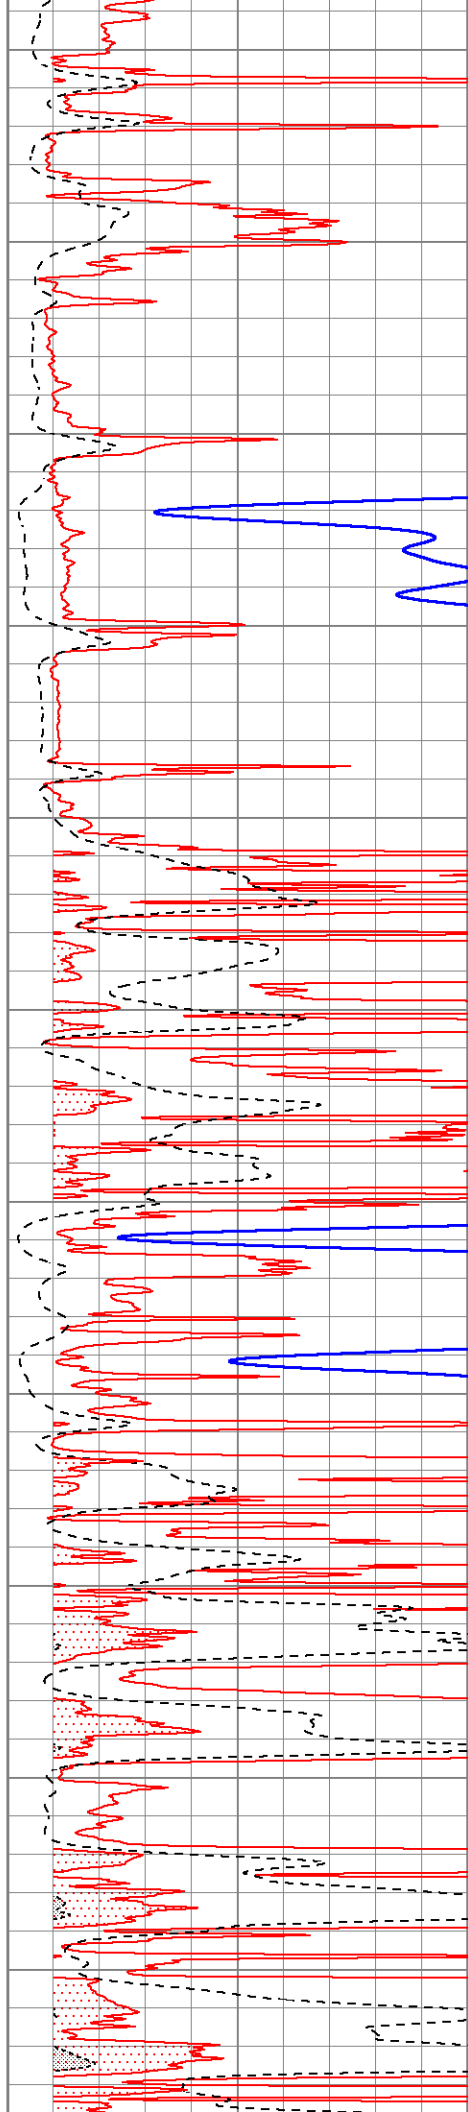

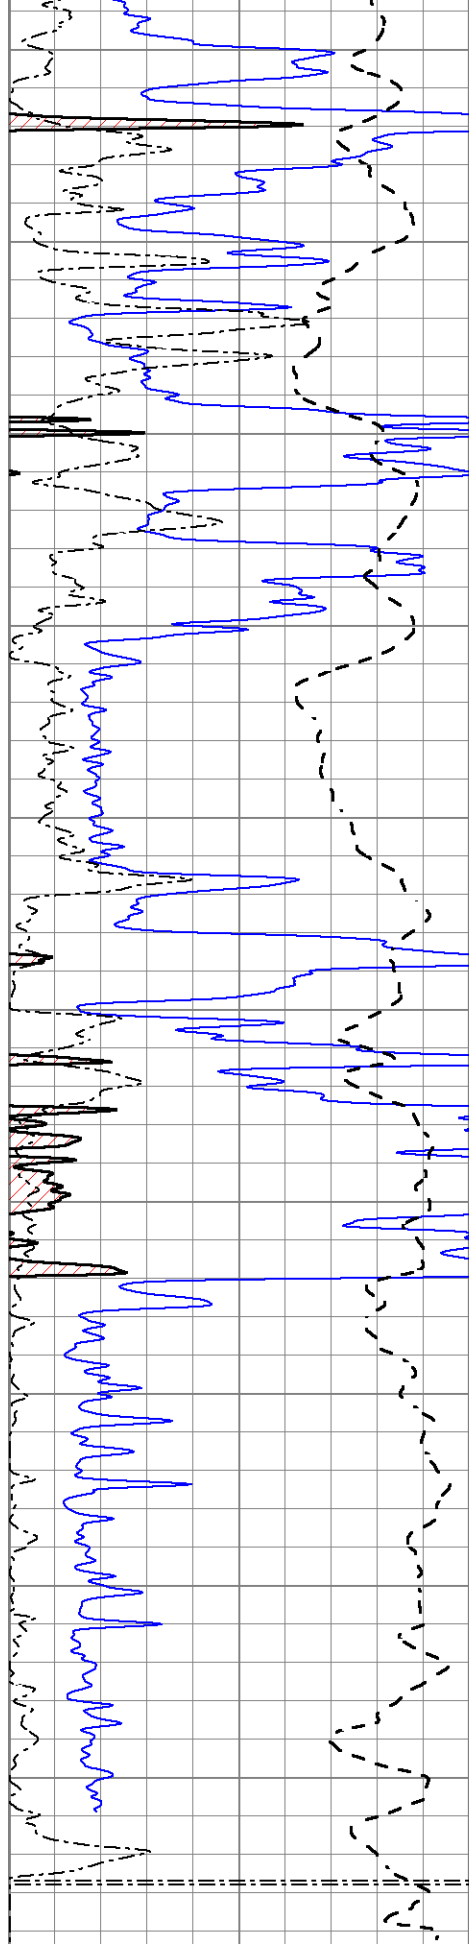

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

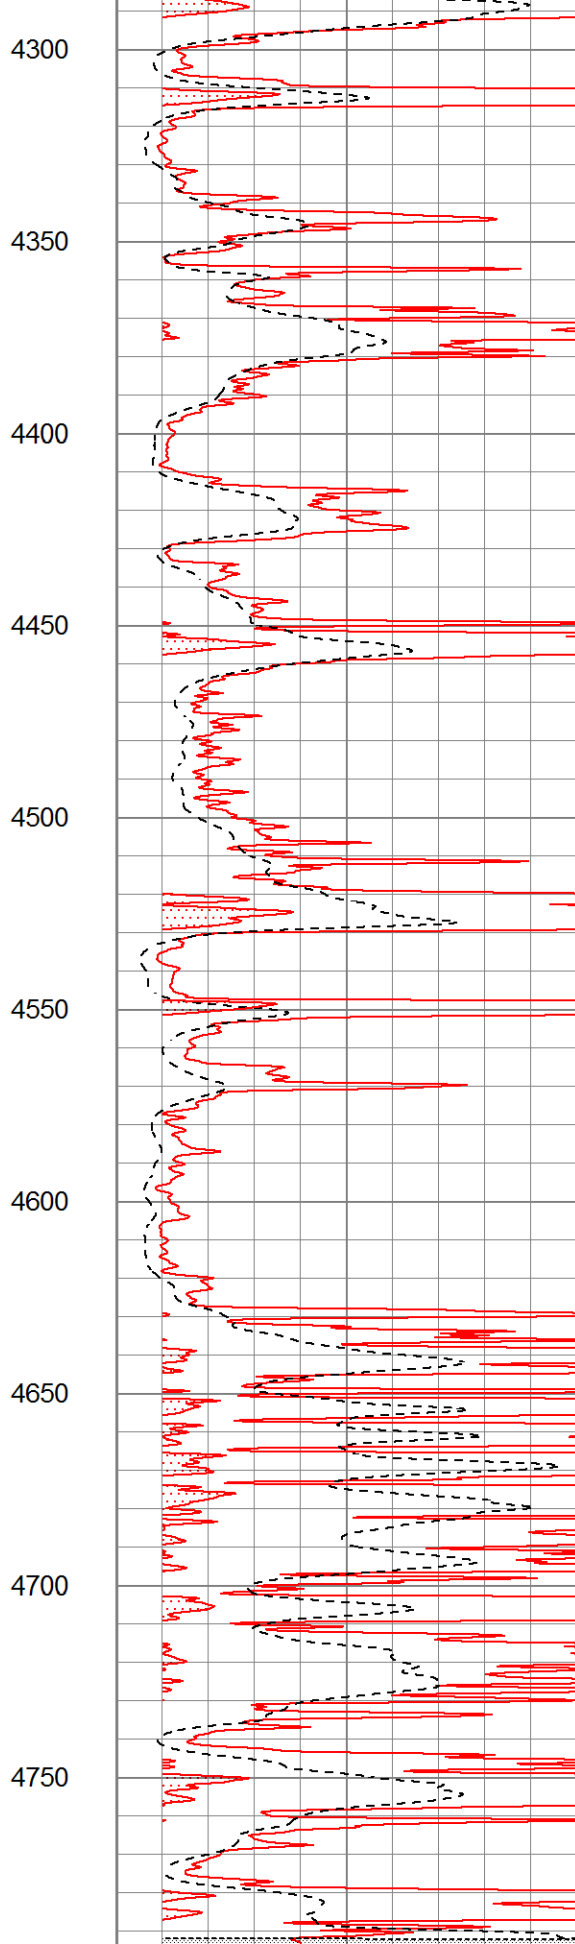

1000	CILD (mmho/m)	0
0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50



0




MAIN SECTION

Database File 6907pe.db
 Dataset Pathname pass3.1M
 Presentation Format _dil
 Dataset Creation Sat Aug 20 06:34:09 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

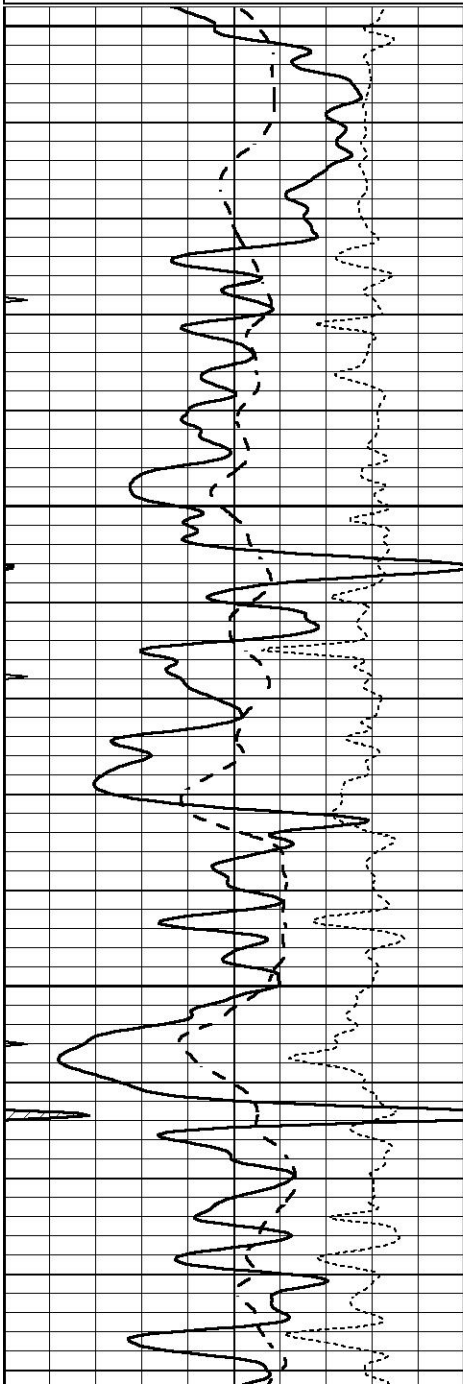


2500

2550

2600

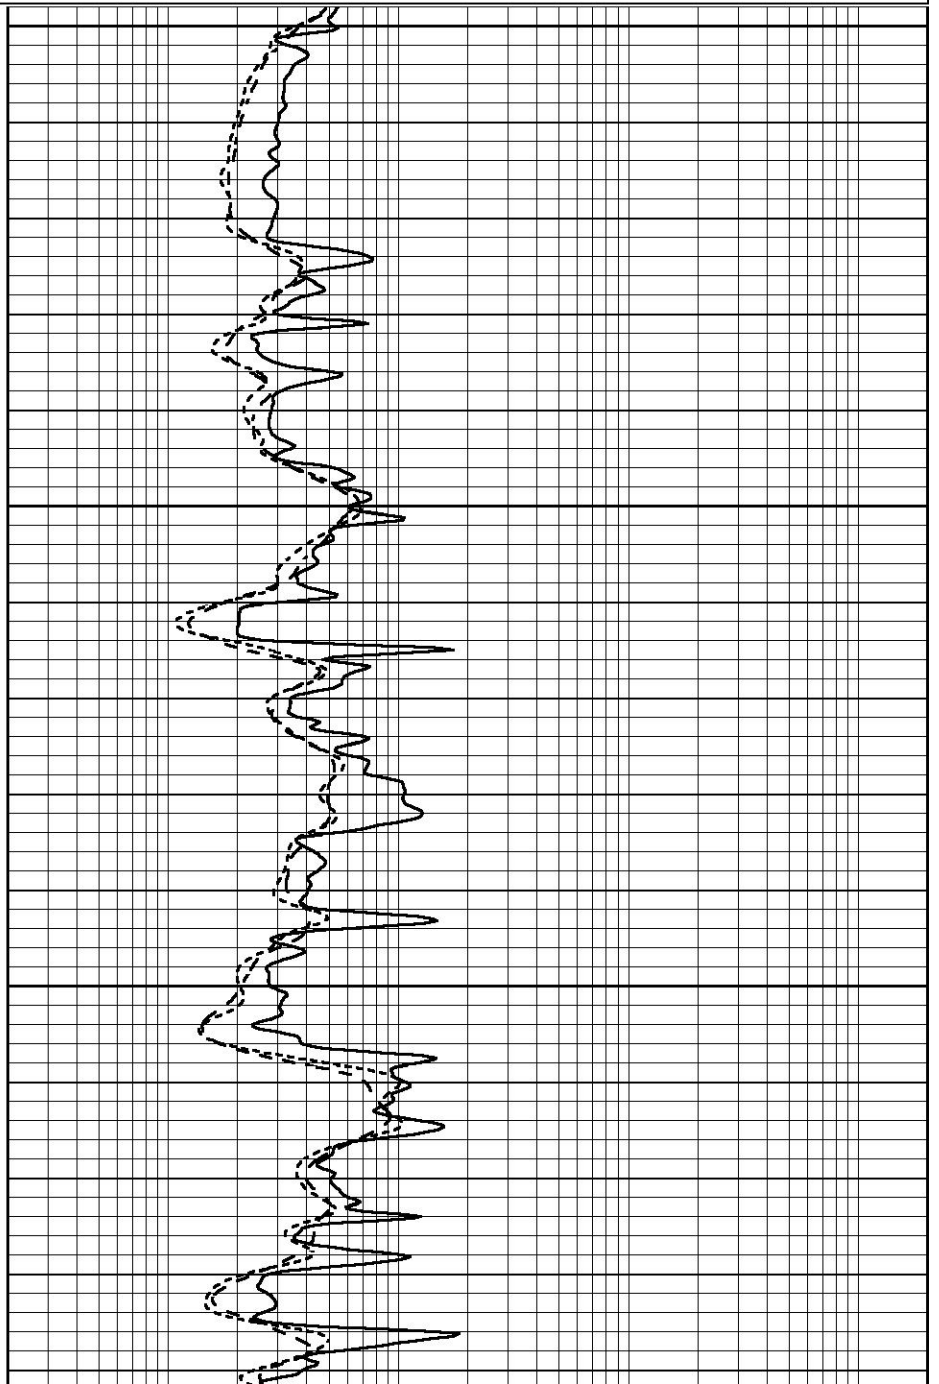

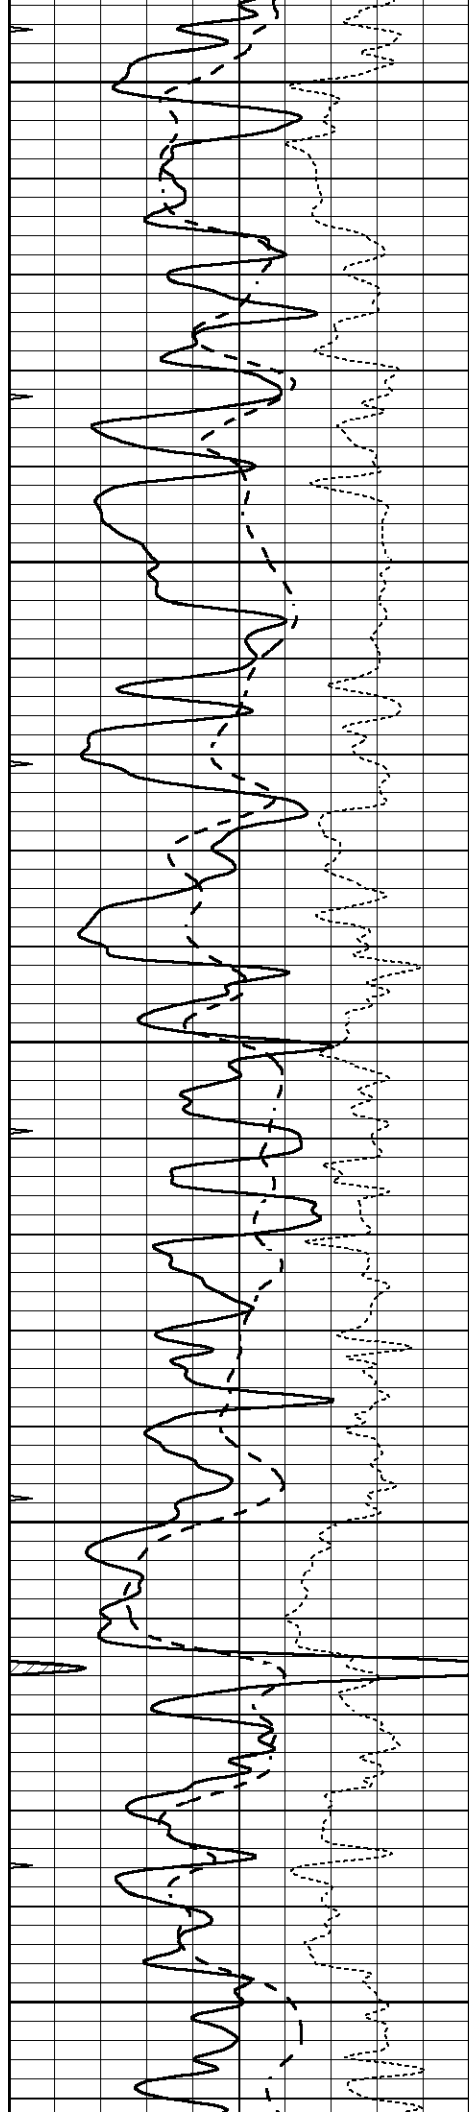


2650


2700

2750

2800

2850

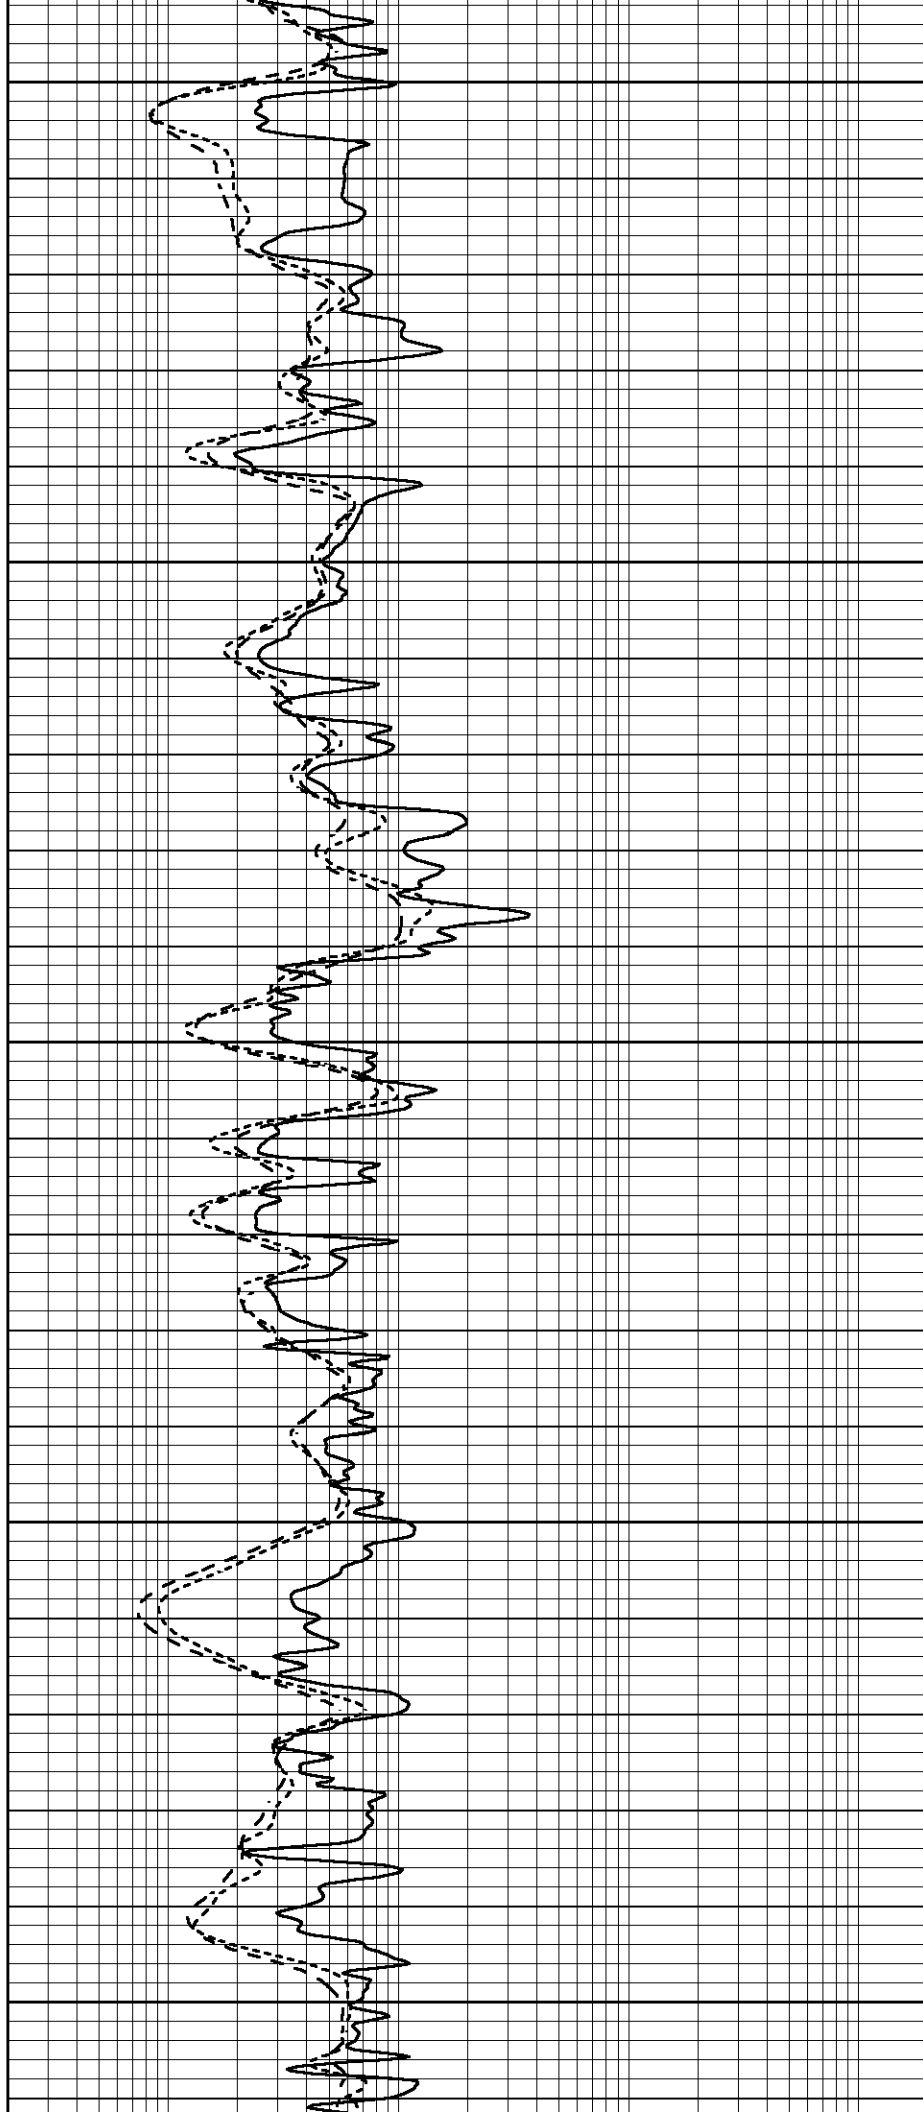

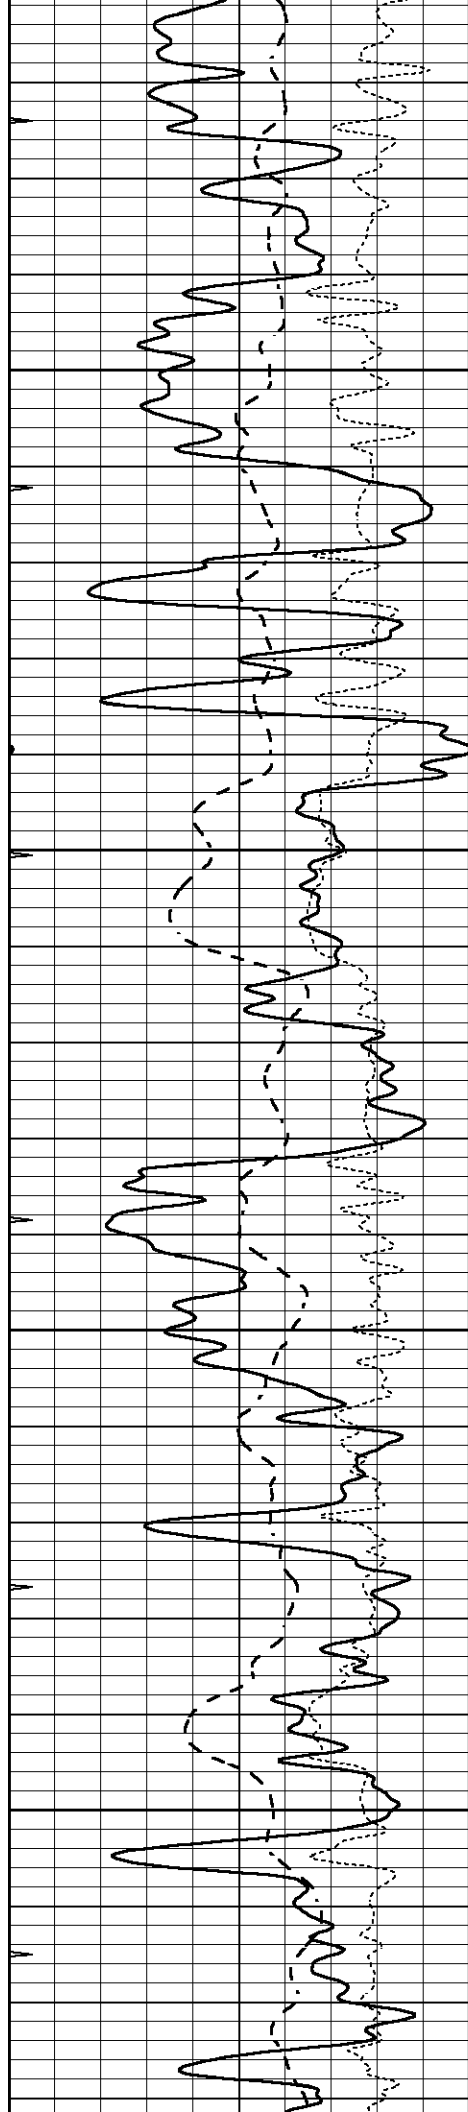



2900

2950

3000

3050

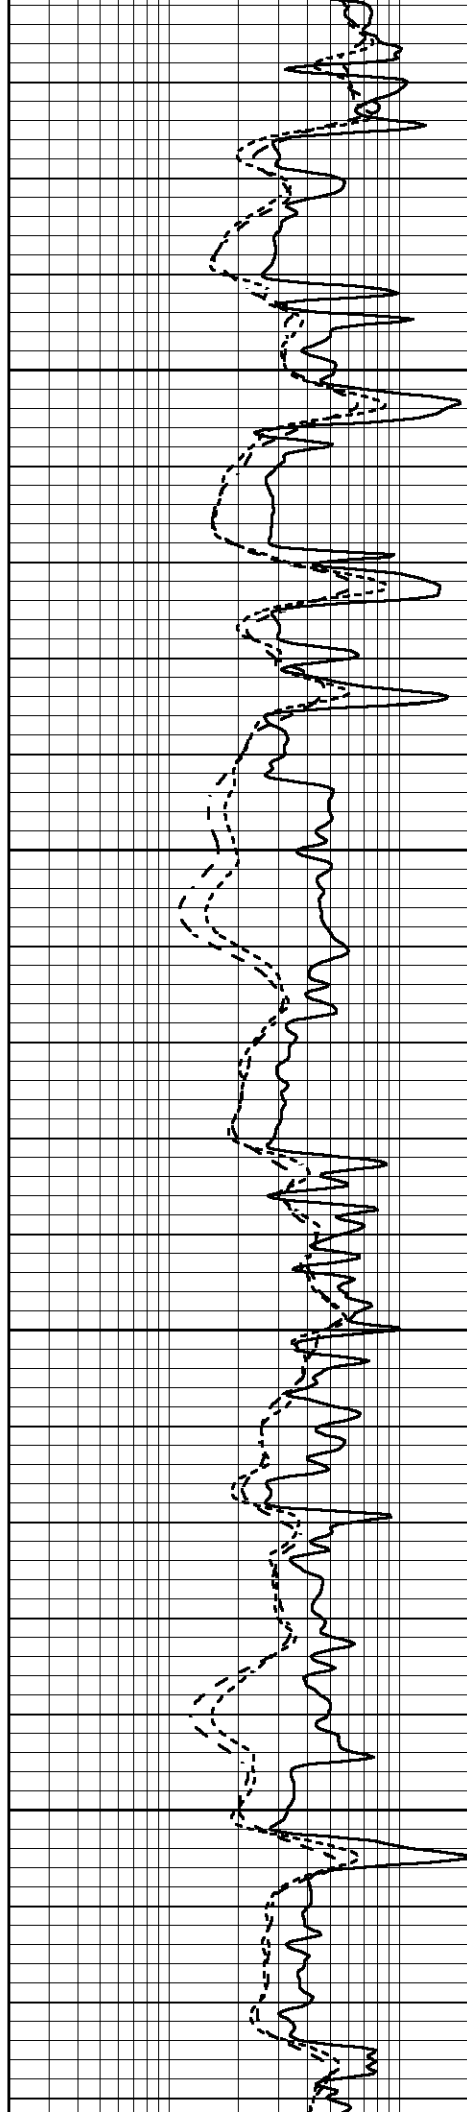

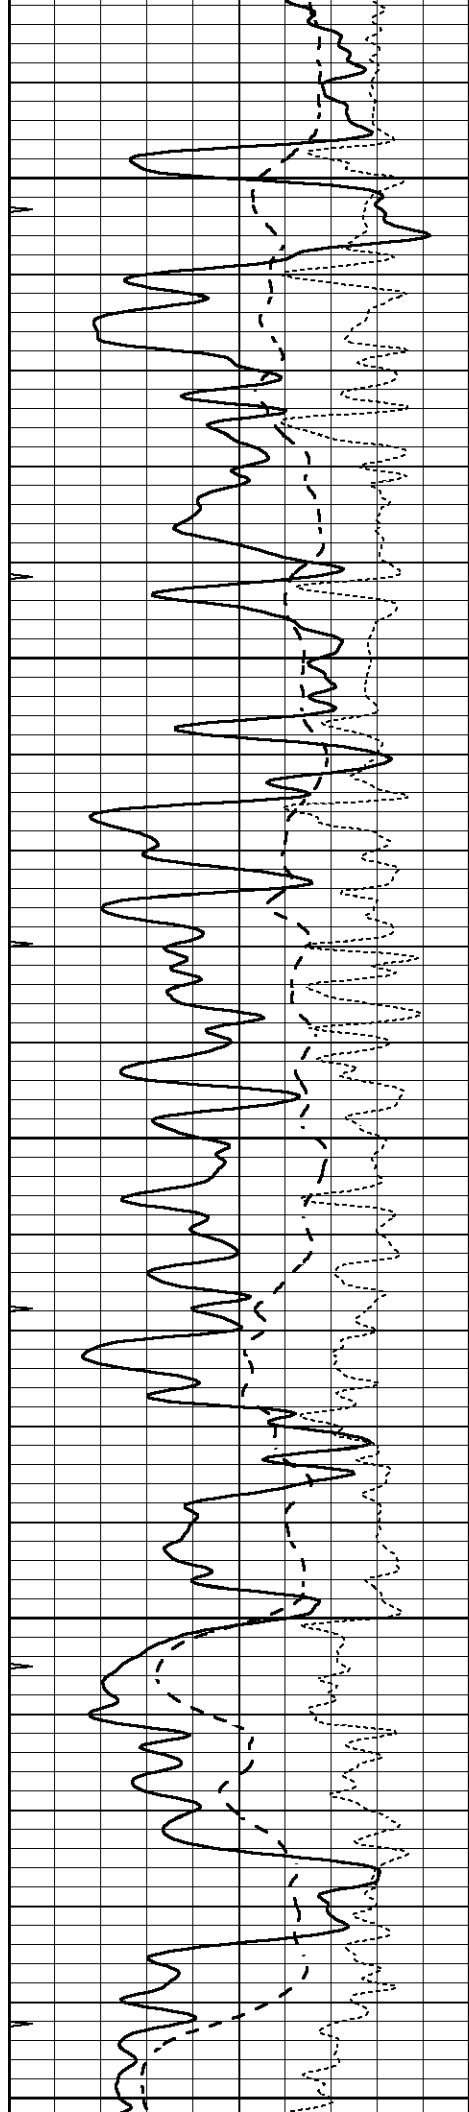


3100


3150

3200

3250

3300

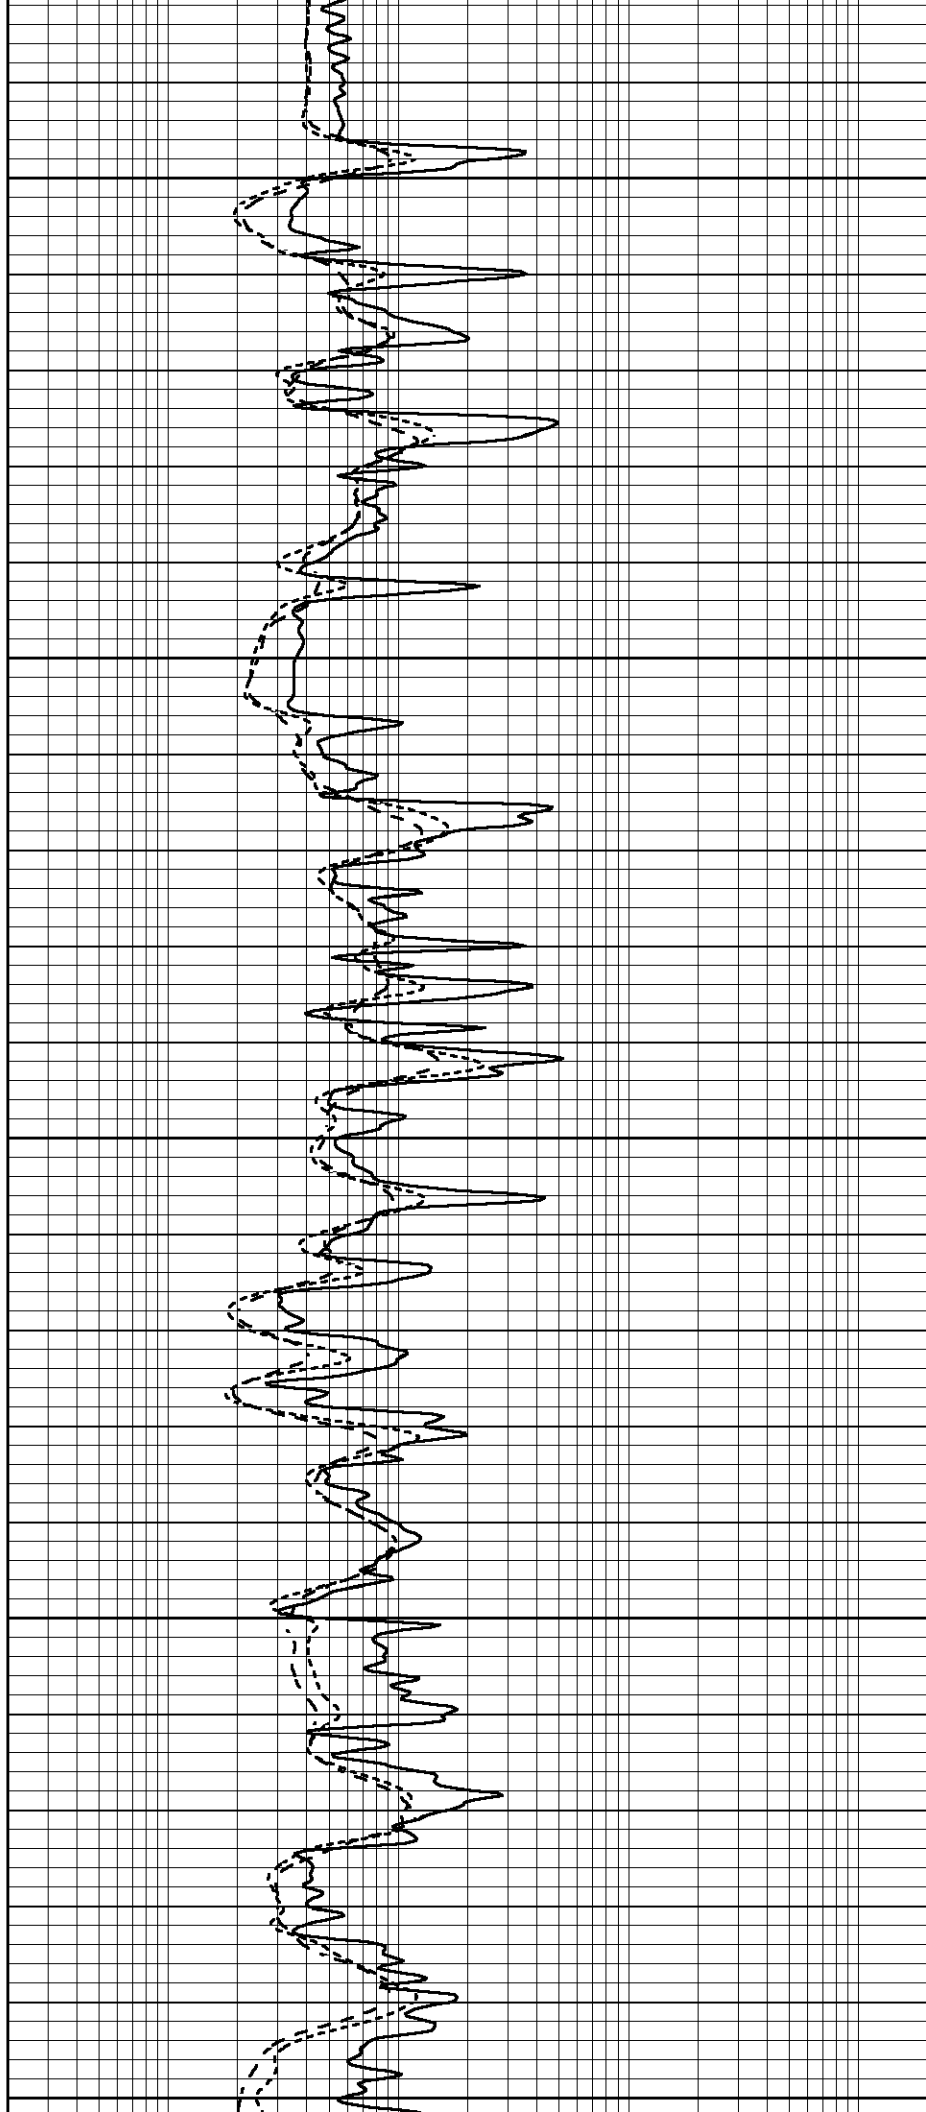

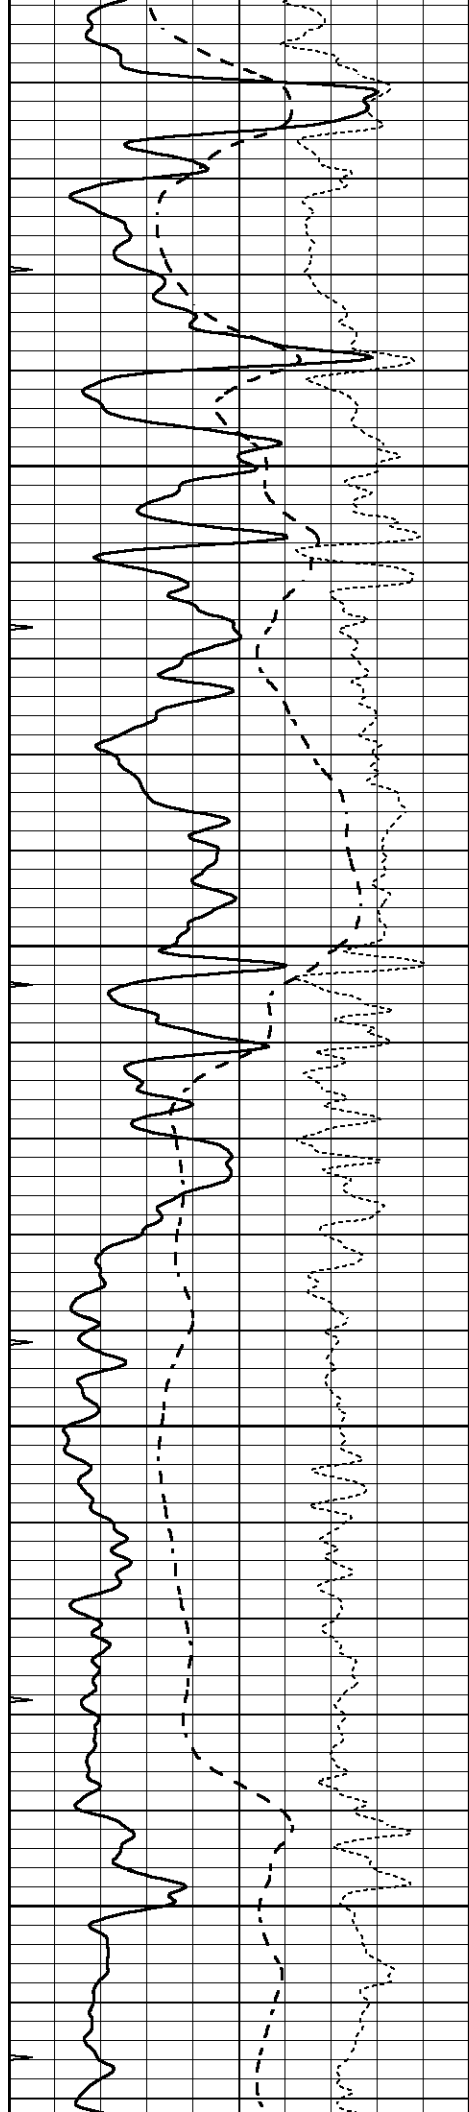



3350

3400

3450

3500

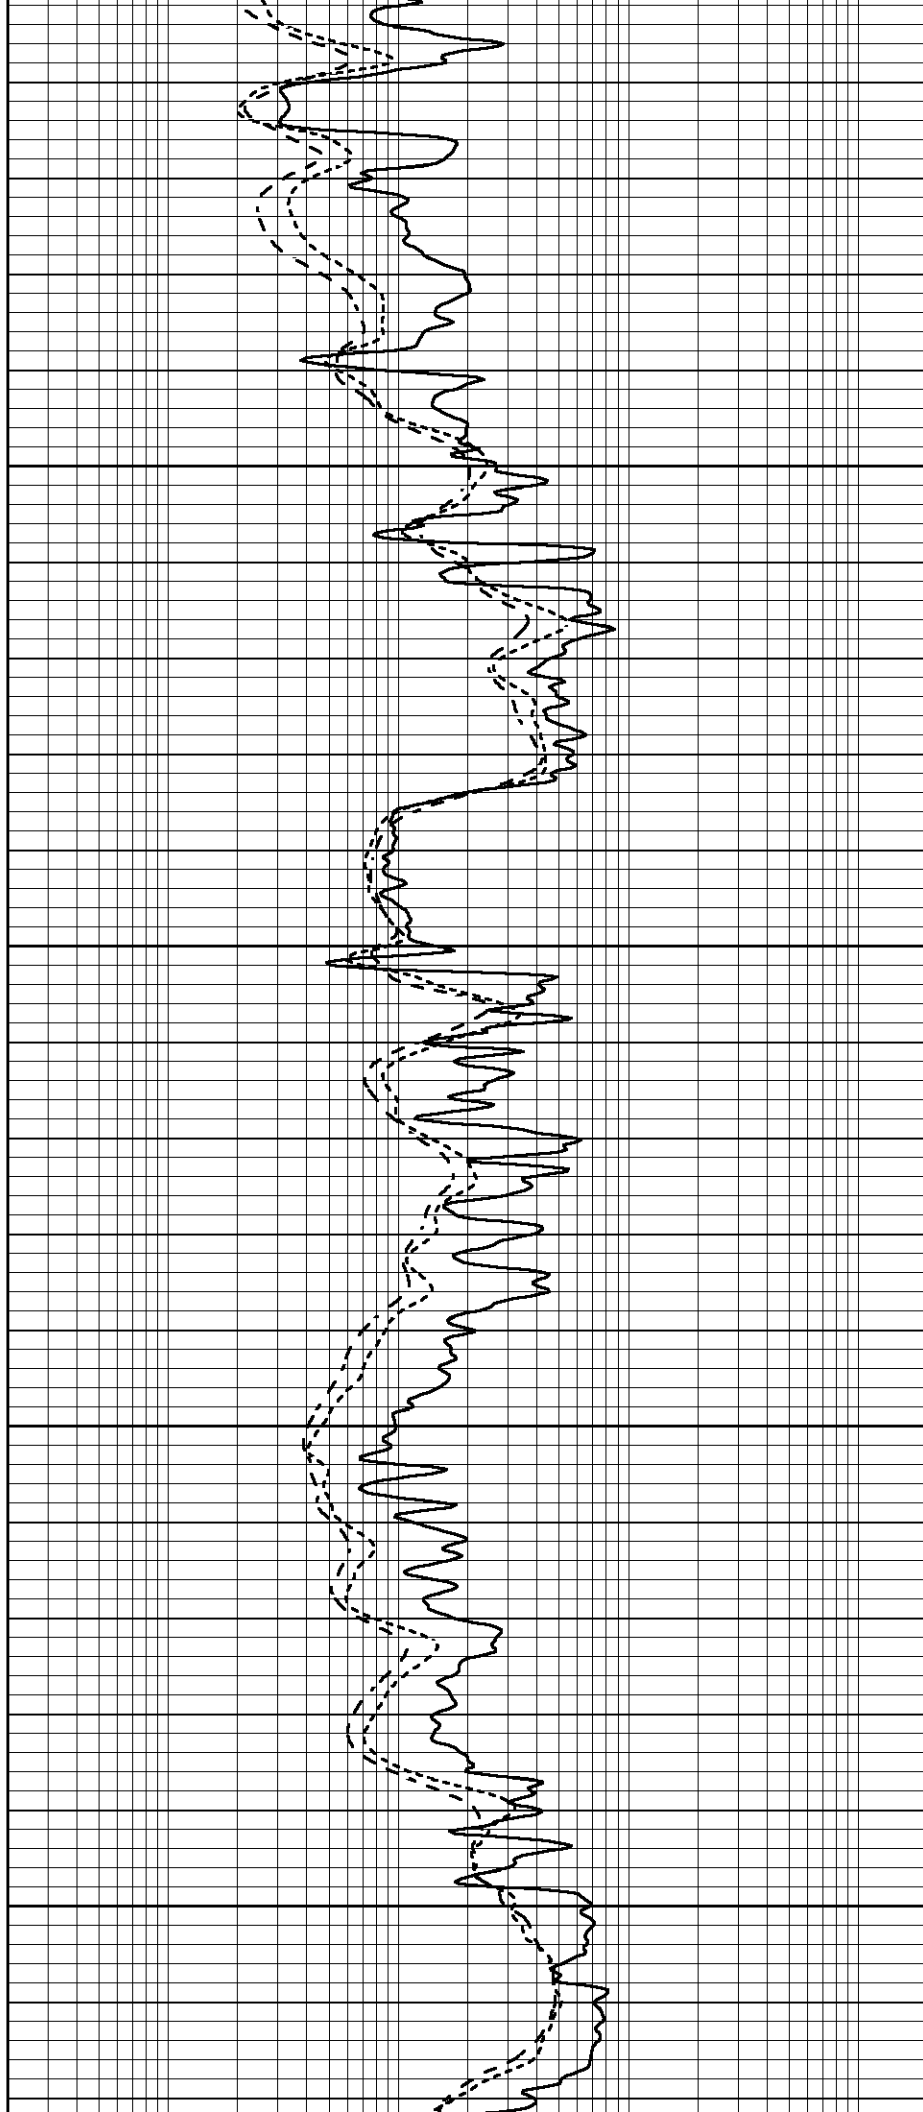

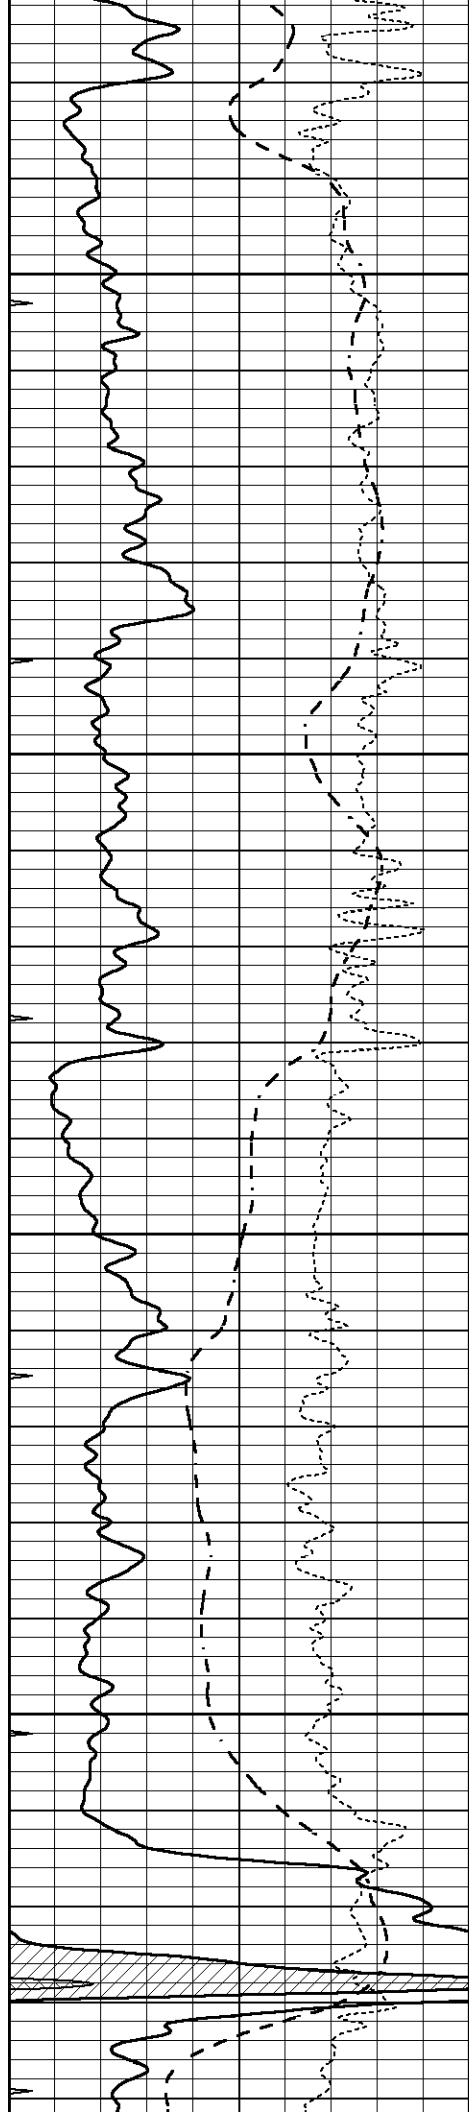



3550

3600

3650

3700

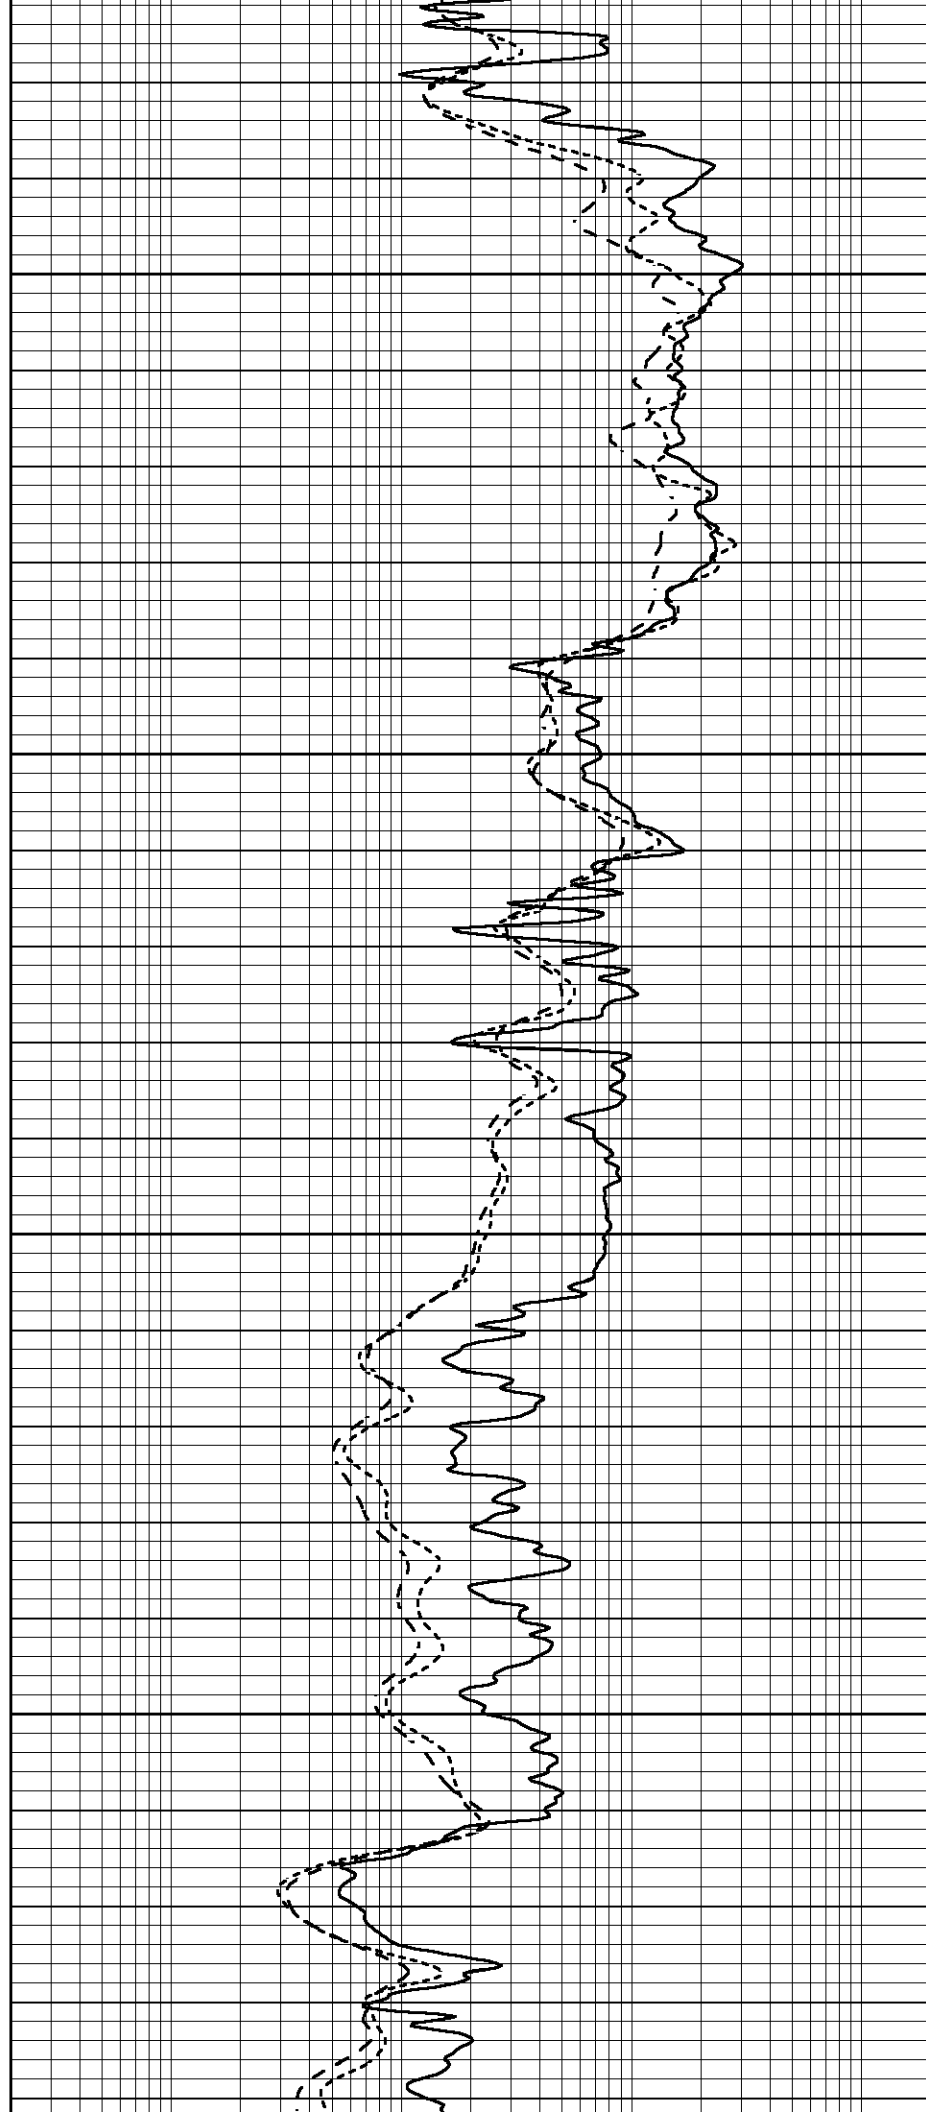

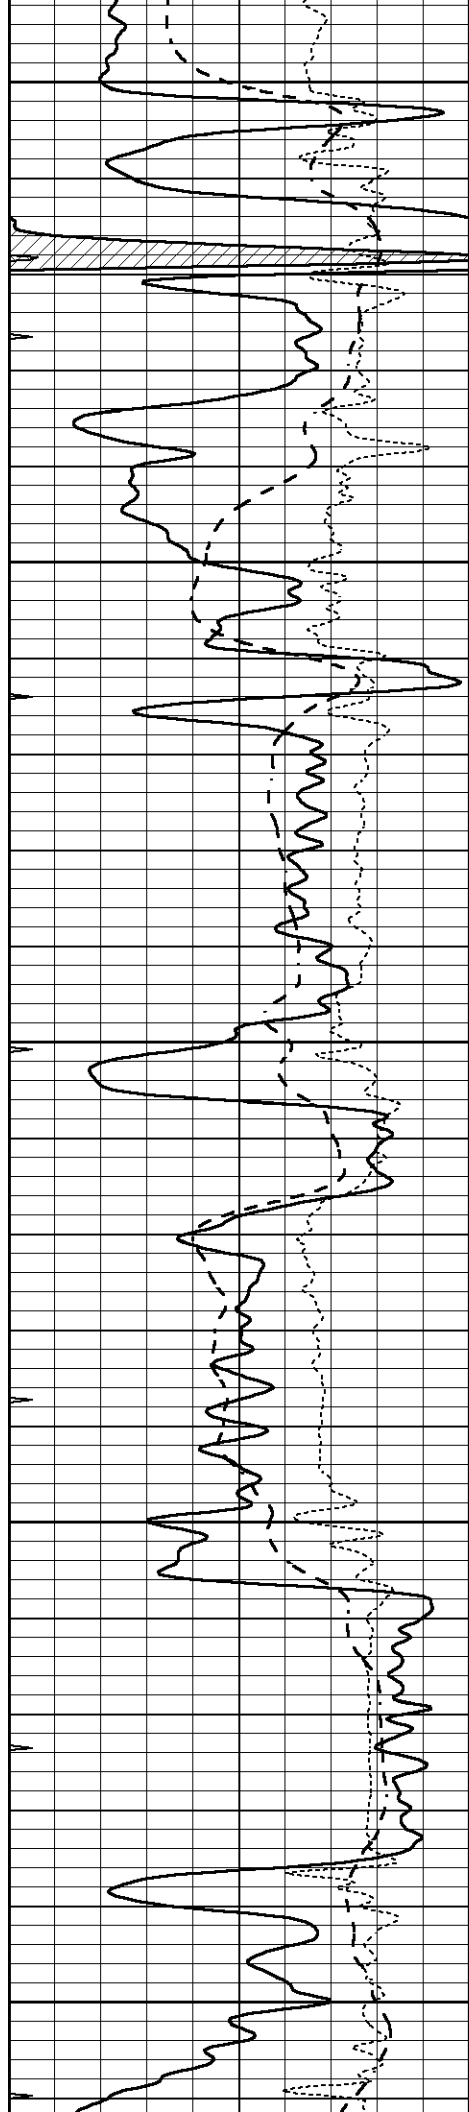


3750


3800

3850

3900

3950

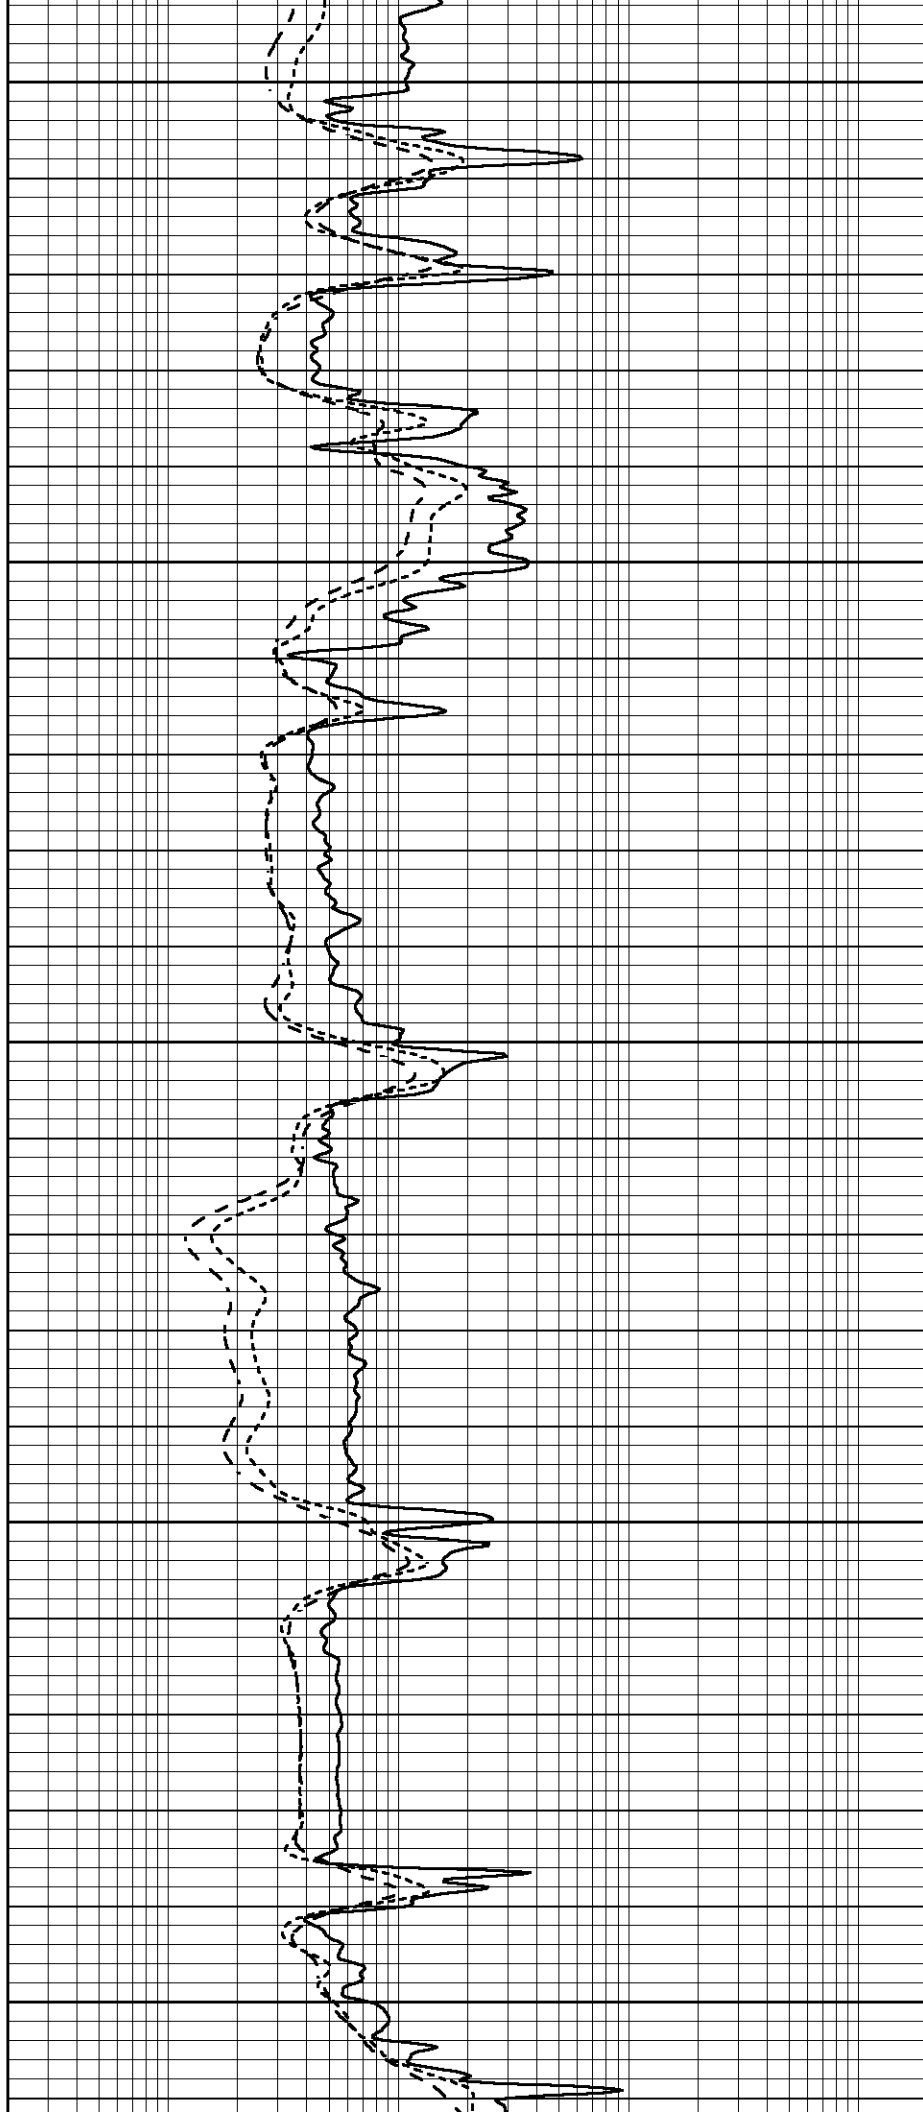

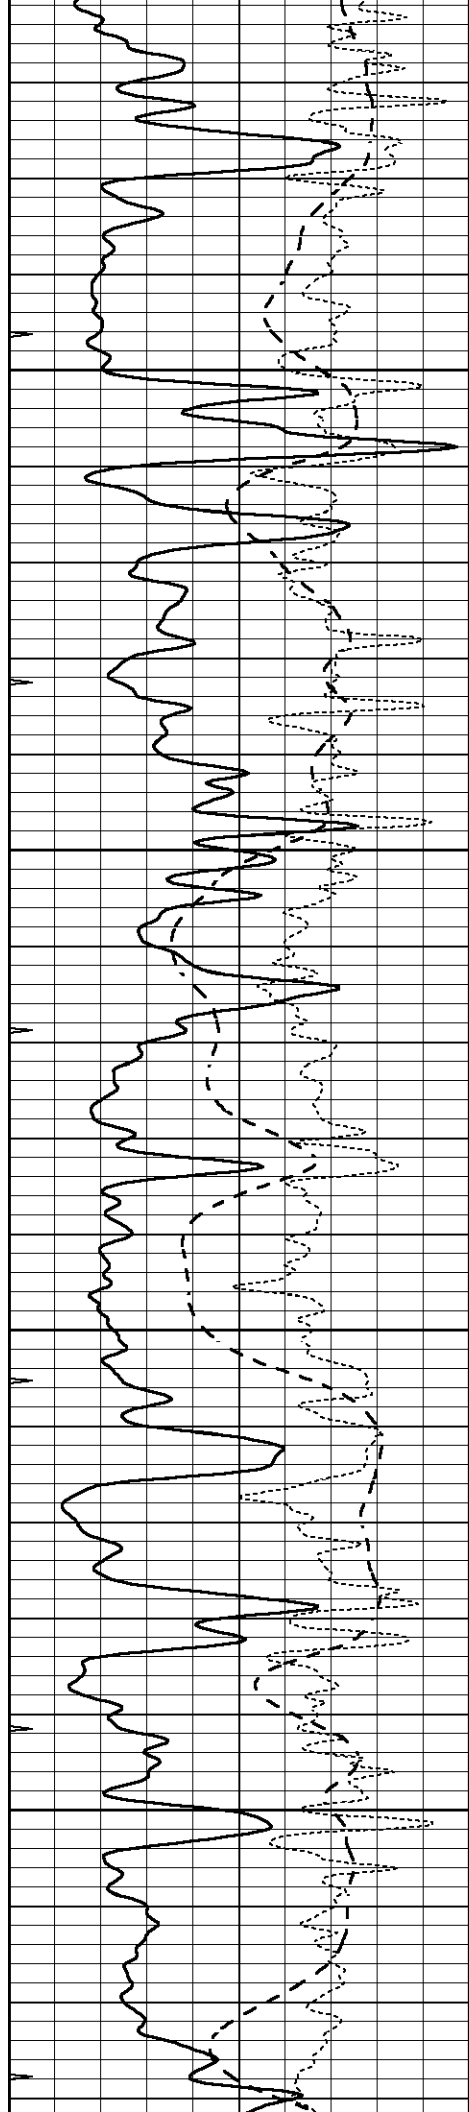



4000

4050

4100

4150

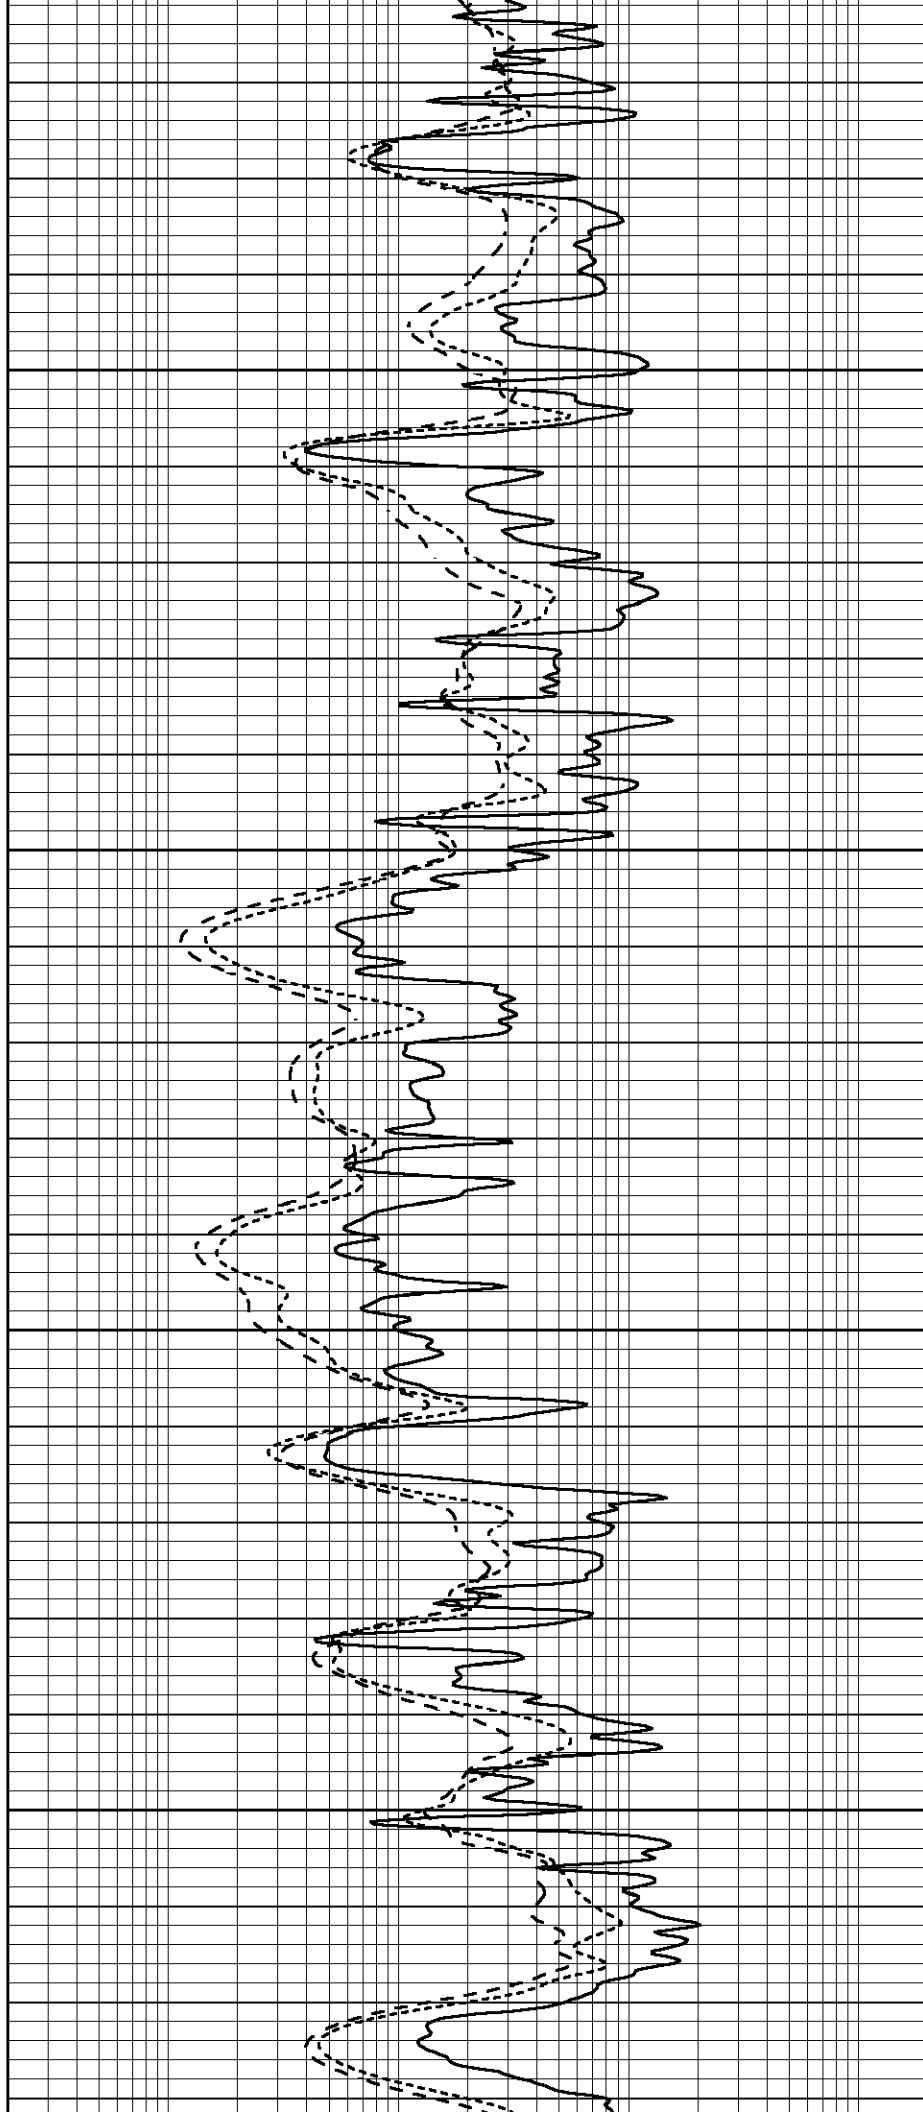

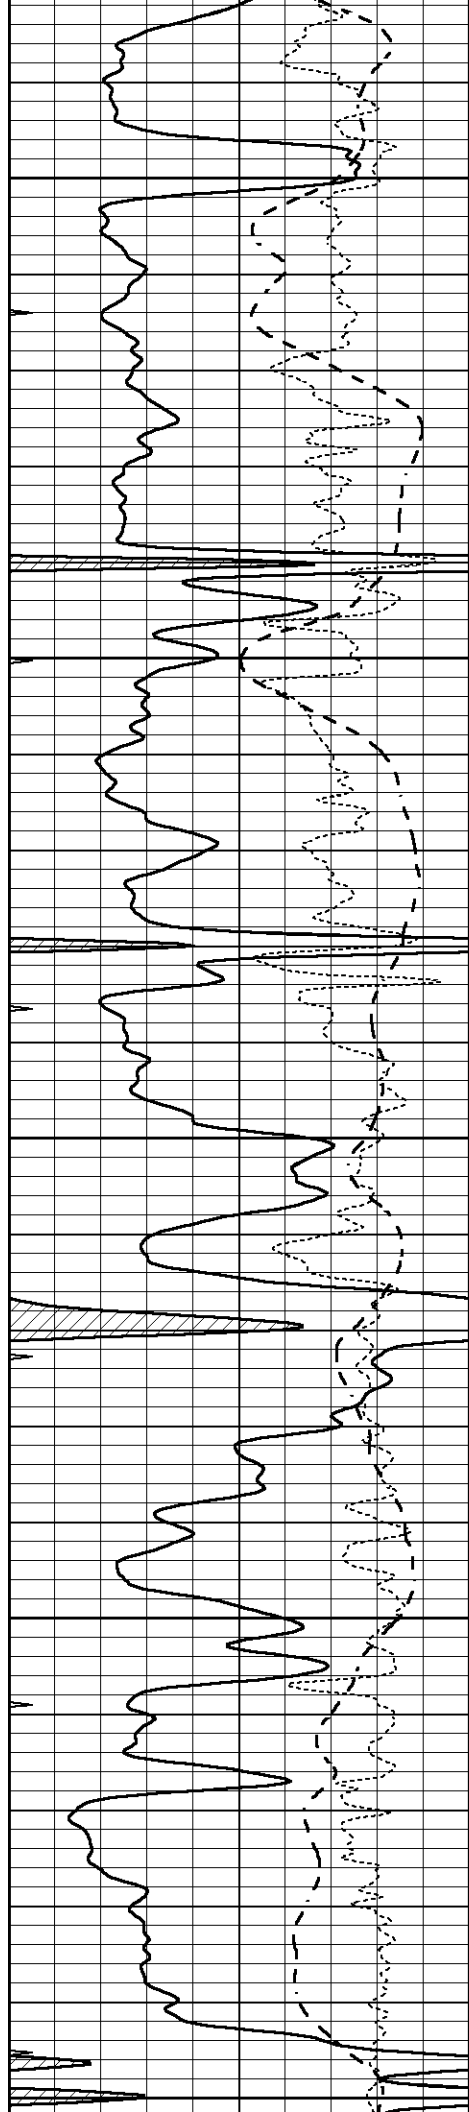


4200


4250

4300

4350

4400

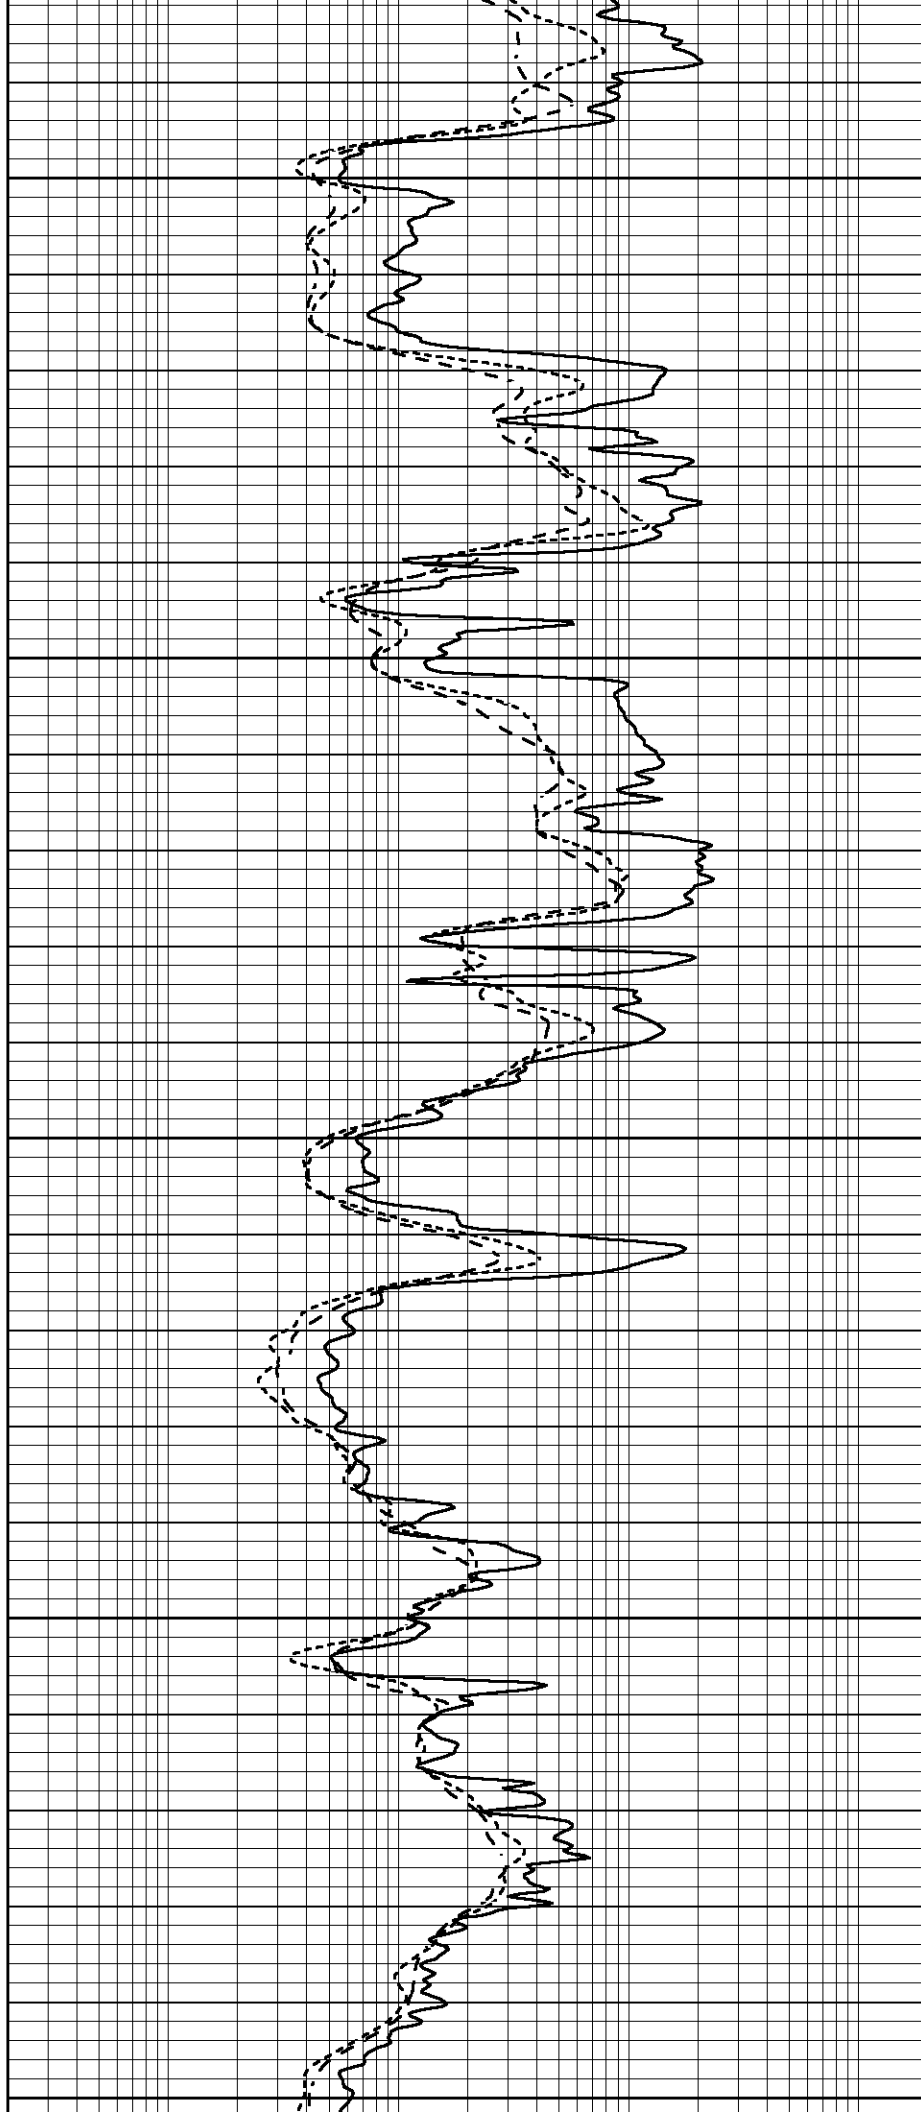

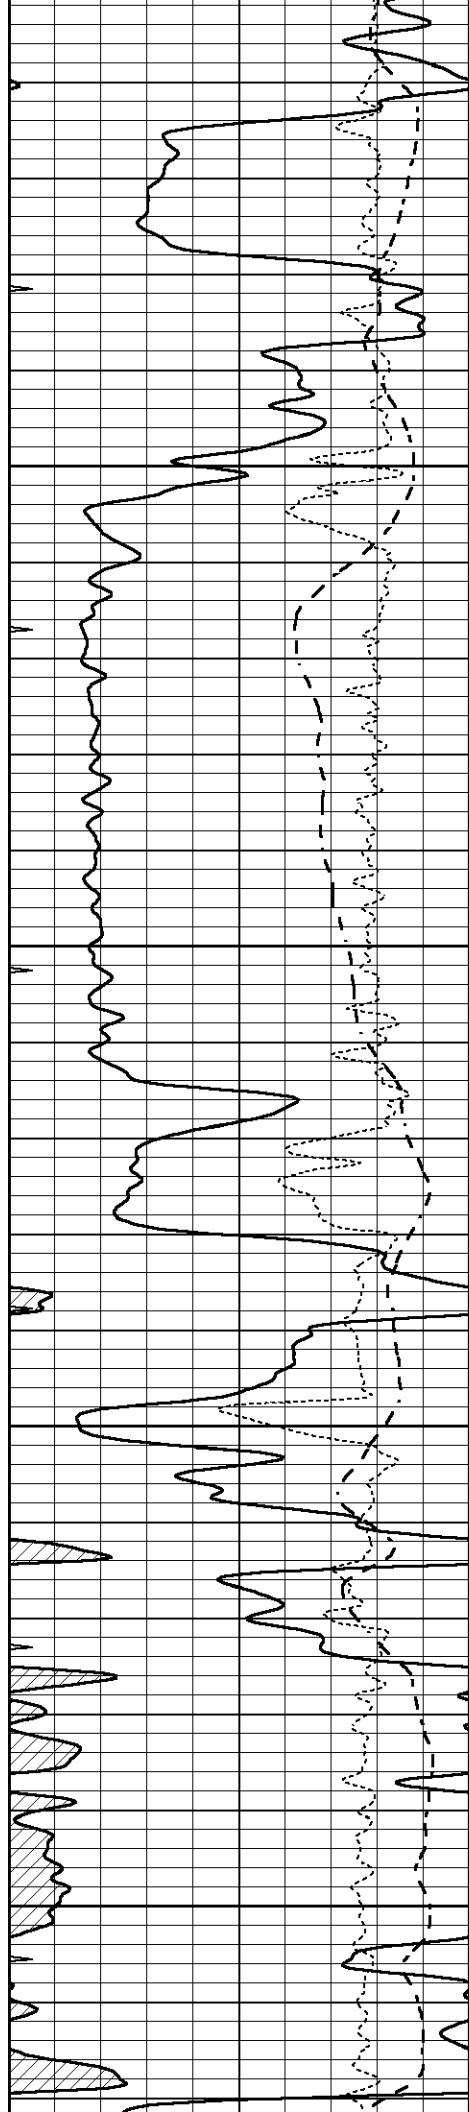



4450

4500

4550

4600

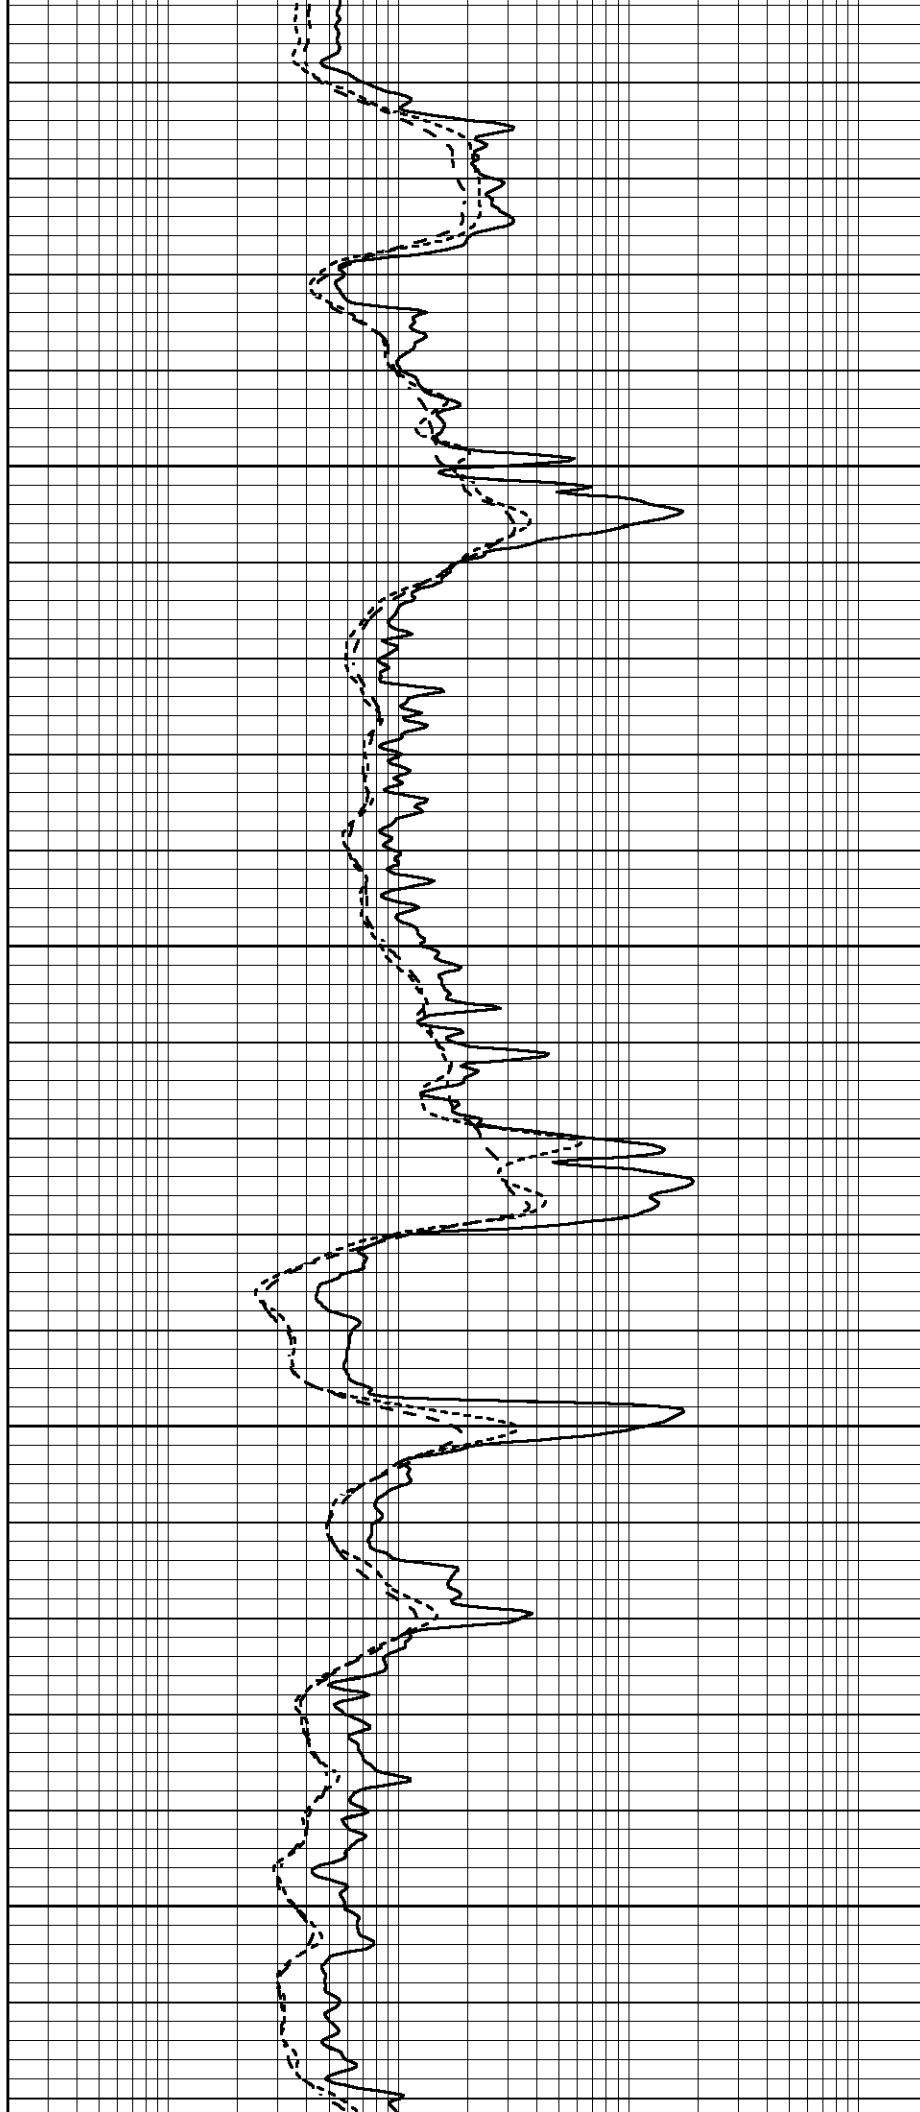

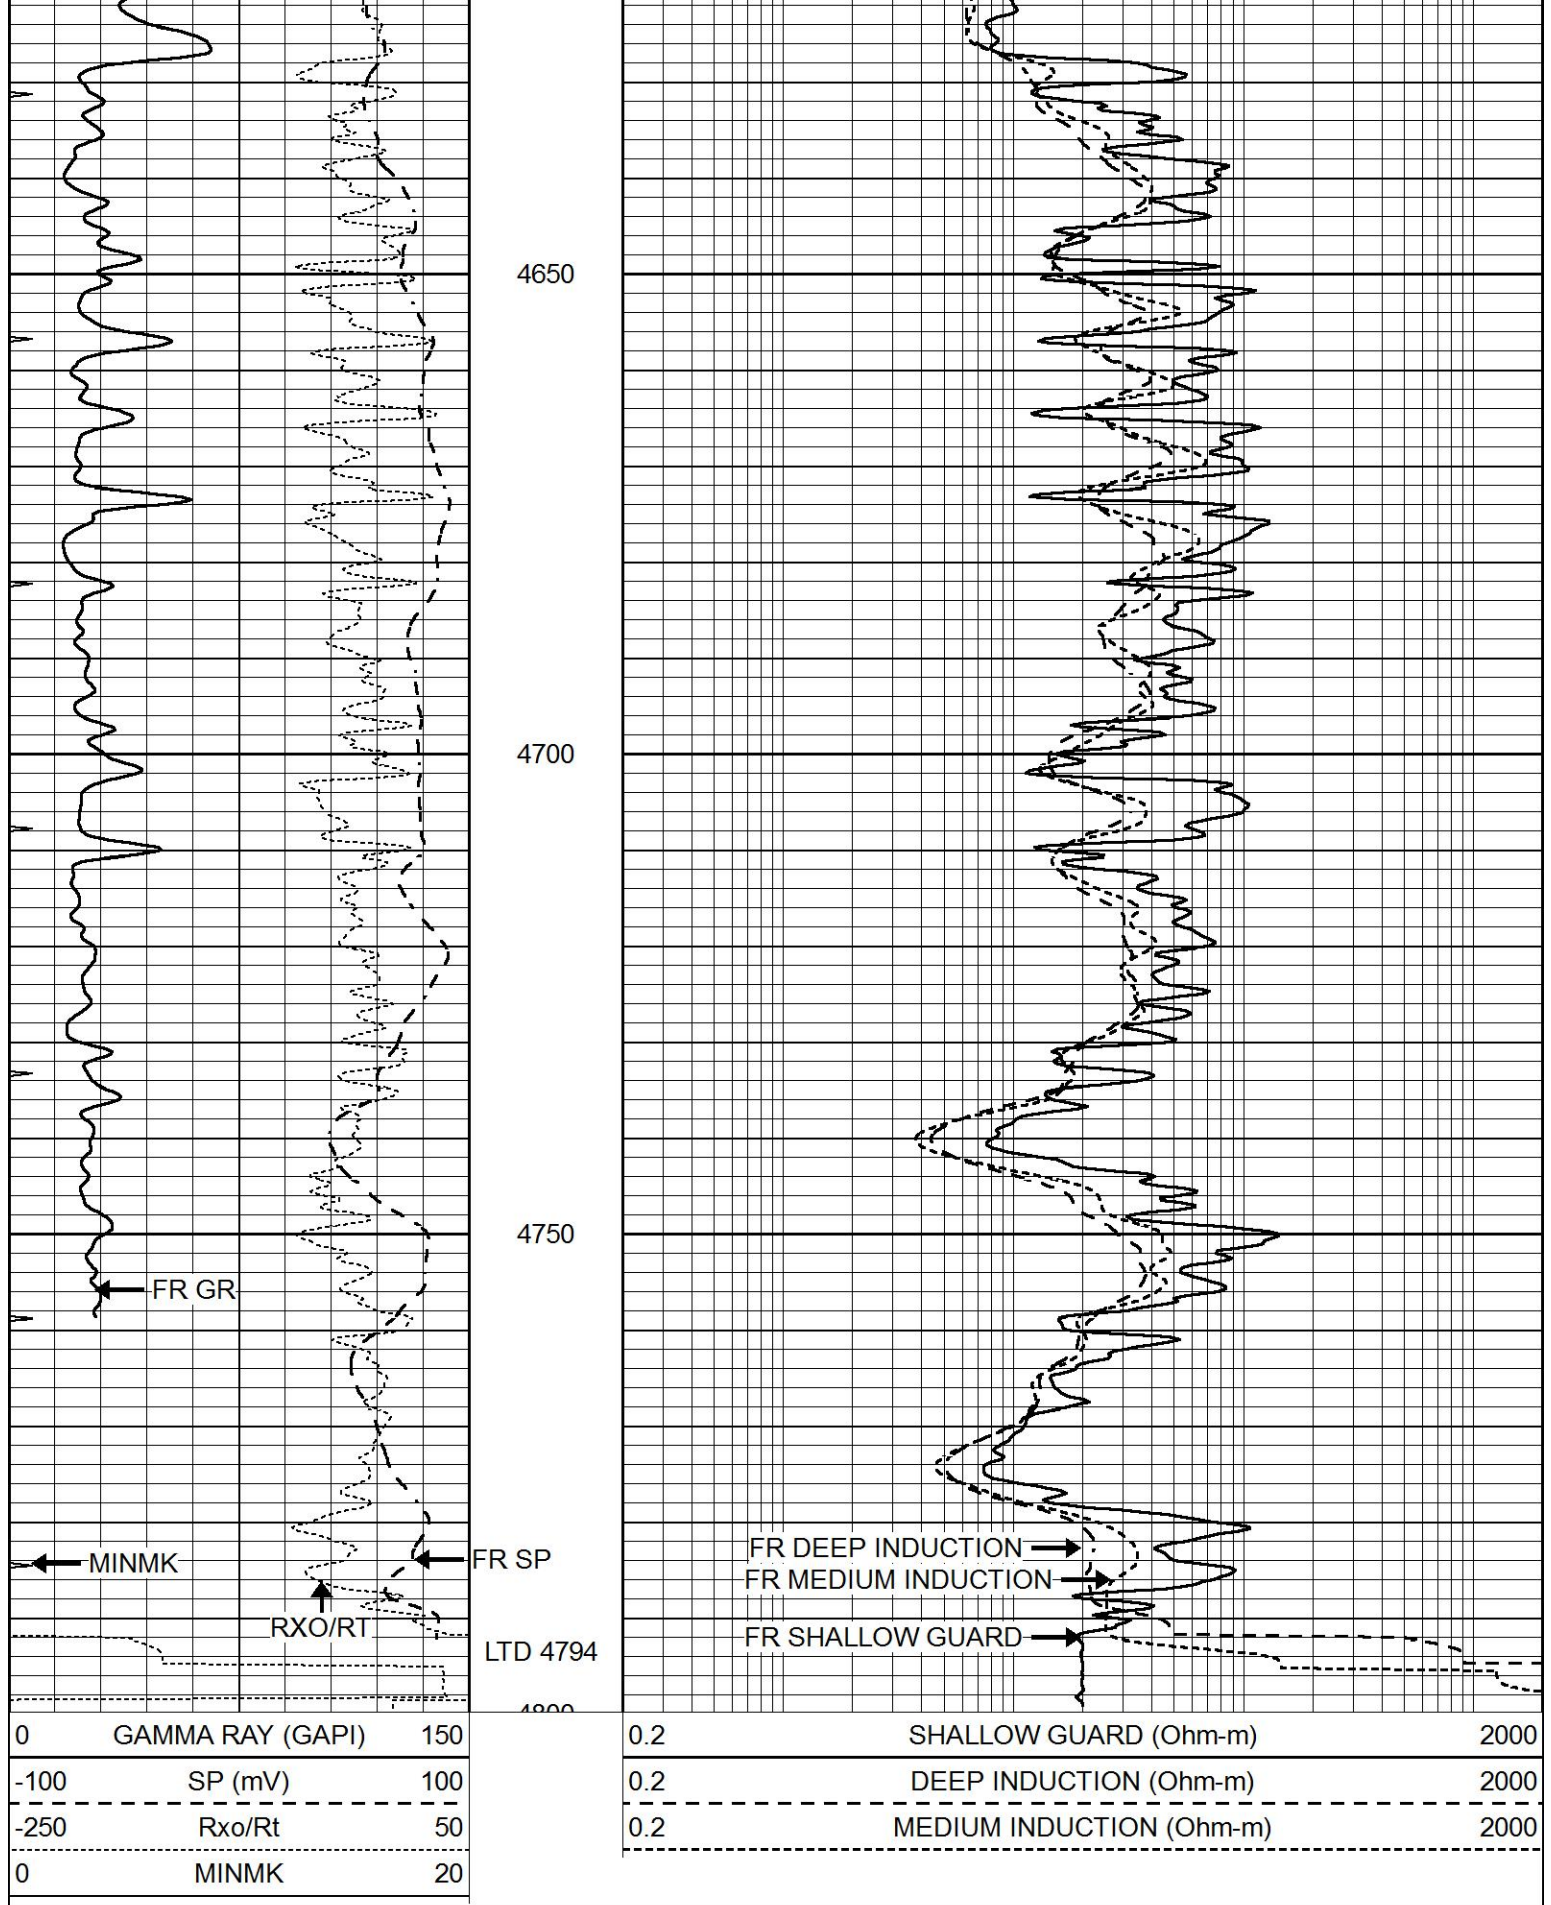


REPEAT SECTION

Database File 6907pe.db
Dataset Pathname pass2.1R
Presentation Format _dil
Dataset Creation Sat Aug 20 05:34:37 2022
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

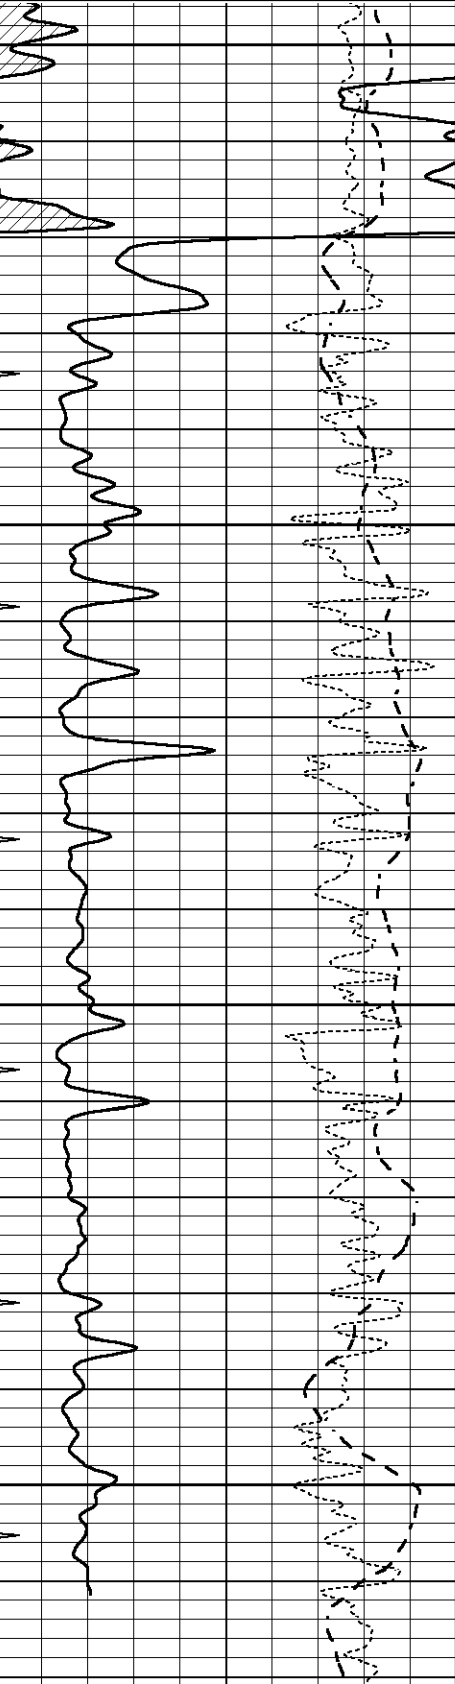



4600

4650

4700

4750

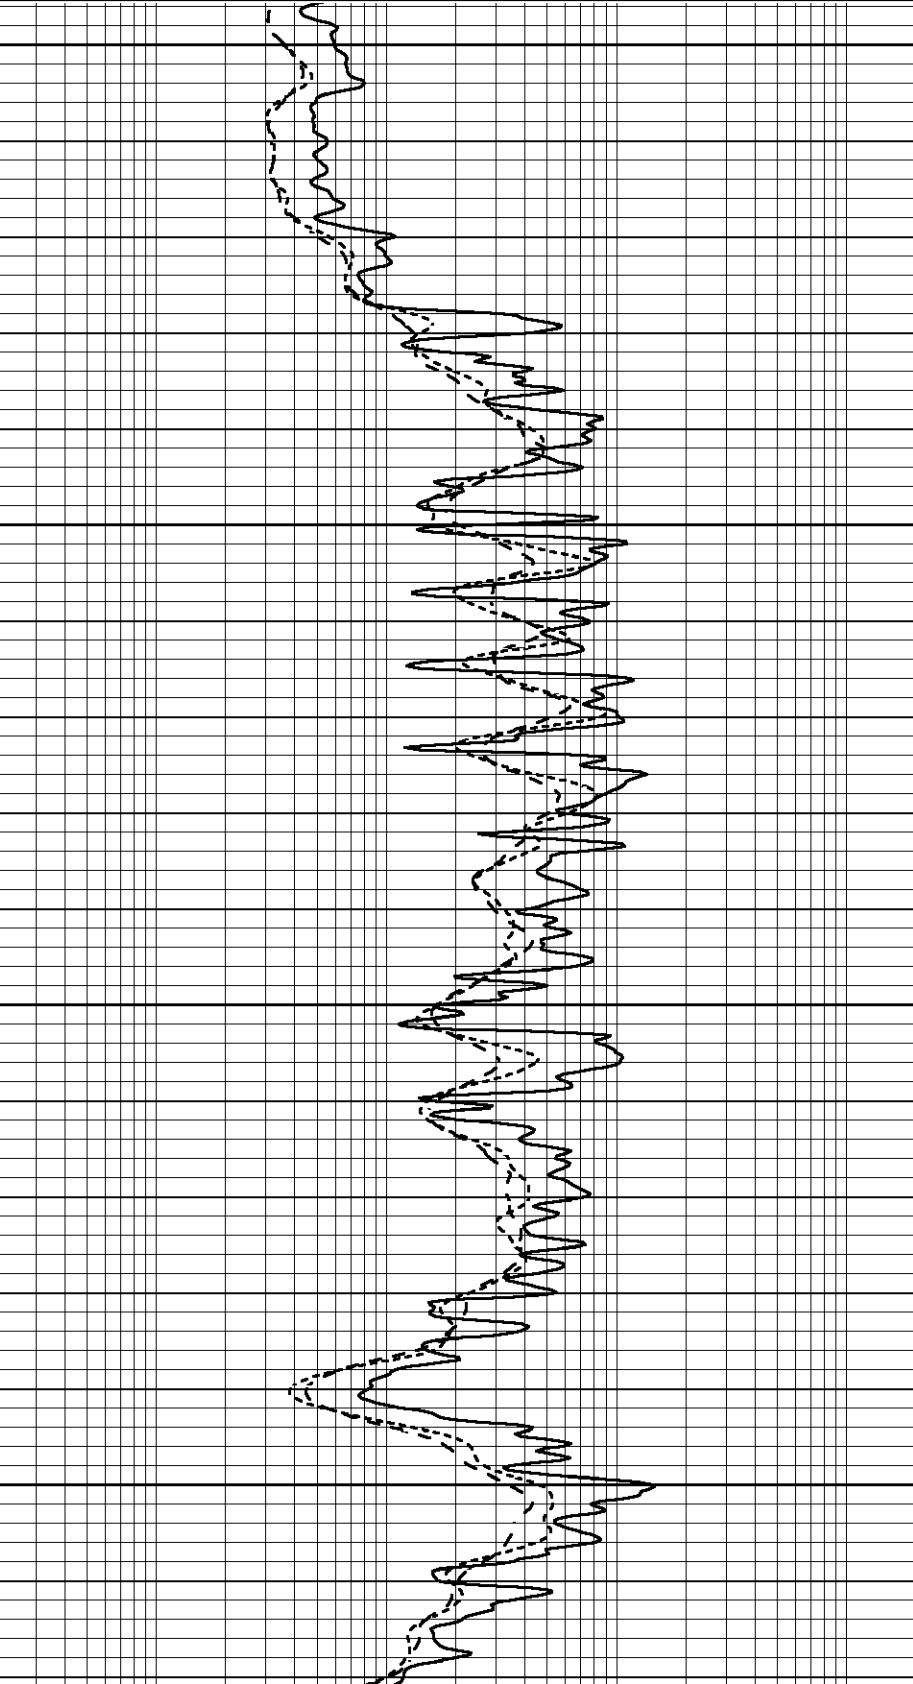

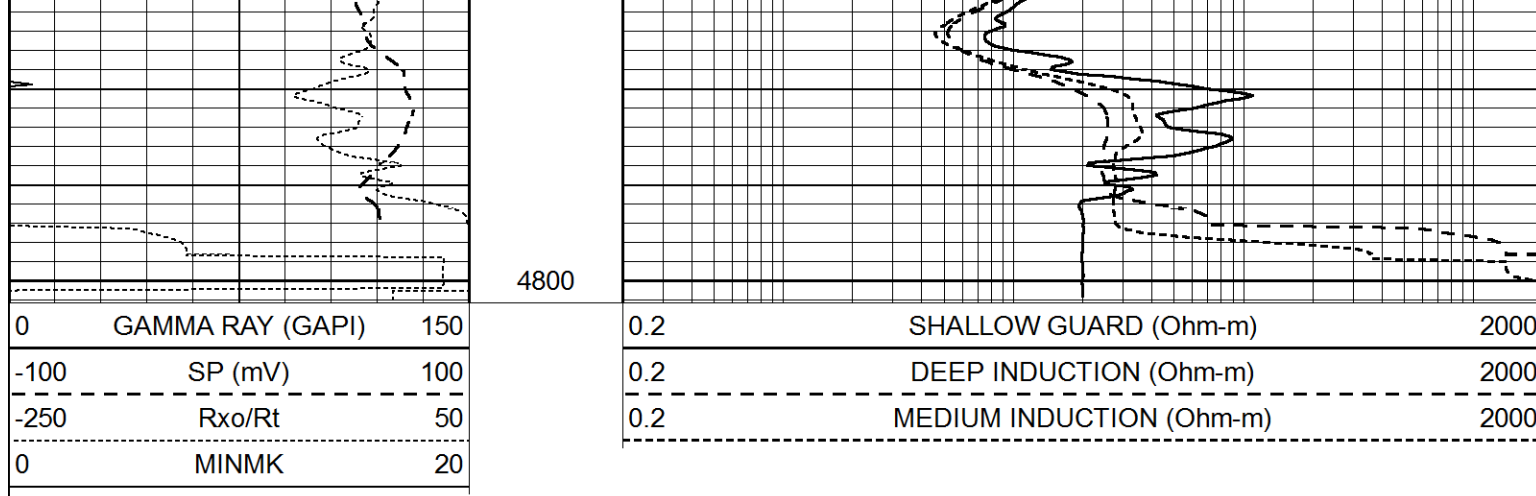

Calibration Report									
Database File	6907pe.db								
Dataset Pathname	pass3.1M								
Dataset Creation	Sat Aug 20 06:34:09 2022								
Dual Induction Calibration Report									
Serial-Model:				PROBE8-DILG					
Surface Cal Performed:				Sat Aug 20 06:06:56 2022					
Downhole Cal Performed:				Mon Jul 28 11:08:27 2008					
After Survey Verification Performed:				Mon Jul 28 11:08:27 2008					
Surface Calibration									
Readings				References			Results		
Loop:	Air	Loop		Air	Loop		m	b	
Deep	0.015	0.648	V	0.000	400.000	mmho/m	640.000	18.000	
Medium	0.029	0.796	V	0.000	464.000	mmho/m	630.000	6.000	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619	
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739	
Downhole Calibration									
Readings				References			Results		
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000	
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000	
LL3		7.500	V		1500.000	Ohm-m			
		0.000	V		20.000	Ohm-m			
		-7.200	V		3800.000	mmho-m			
After Survey Verification									
Readings				Targets			Results		
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
LL3		1.000	Ohm-m		1.000	Ohm-m			
		0.000	Ohm-m		0.000	Ohm-m			
		1.000	mmho-m		1.000	mmho-m			
Litho Density Calibration Report									
Serial: 004				Model: PRB					

	Background	Magnesium	Aluminum	Aluminum+Fe	
Window 1	1154.2	10019.5	3137.9	2795.6	cps
Window 2	1054.4	8597.6	2733.4	2469.5	cps
Window 3	902.3	5241.4	1832.1	1719.3	cps
Window 4	251.9	261.1	255.8	252.9	cps
Long Space	0.0	7543.2	1679.0	1415.0	cps
Short Space	4.4	2049.3	1321.7	1116.8	cps
Rho		1.7100	2.5900	0.0000	g/cc
Pe		2.0000	2.7500	5.7900	
Rib Angle	: 43.7	Rib Slope	: 0.957	Density/Spine Ratio	: 0.562
Spine Angle	: 73.7	Spine Slope	: 3.426	Spine Intercept	: -17.2

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808PMC
Tool Model: NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070558
Tool Model:	OPEN_GR
Performed:	Tue Aug 16 14:40:27 2022

Calibrator Value:	1.0	GAPI
-------------------	-----	------

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity:	0.3000	GAPI/cps
--------------	--------	----------