



MICRO LOG

Company	SHELBY RESOURCES, LLC.	
Well	ROCKY #1-26	
Field	INGRAM	
County	PRATT	State KANSAS
Location:	API # : 15-151-22553-0000 933' FSL & 605' FWL	
Permanent Datum	SEC 26 TWP 28S RGE 14W	Other Services CDL/CNL/PE DIL/SONIC
Log Measured From	GROUND LEVEL	
Drilling Measured From	KELLY BUSHING 12' A.G.L. KELLY BUSHING	Elevation K.B. 1974 D.F. 1972 G.L. 1962
Date	8/20/22	
Run Number	TWO	
Depth Driller	4793	
Depth Logger	4794	
Bottom Logged Interval	4778	
Top Log Interval	2500	
Casing Driller	8 5/8"@826'	
Casing Logger	826	
Bit Size	7 7/8"	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 7.000 PPM
Density / Viscosity	9.3/55	
pH / Fluid Loss	9.5/9.6	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	.600@80F	
Rmf @ Meas. Temp	.450@80F	
Rmc @ Meas. Temp	.720@80F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.390@123F	
Time Circulation Stopped	4.5 HOURS	
Time Logger on Bottom	7:00 A.M.	
Maximum Recorded Temperature	123F	
Equipment Number	922339	
Location	HAYS, KANSAS	
Recorded By	JEFF LUEBBERS	
Witnessed By	JEREMY SCHWARTZ	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-151-22553-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
PRATT, KS., 5S. ON HWY 281 TO "50TH ST.", 5W., N. INTO





MAIN SECTION


Database File	6907pe.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Sat Aug 20 09:01:44 2022
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

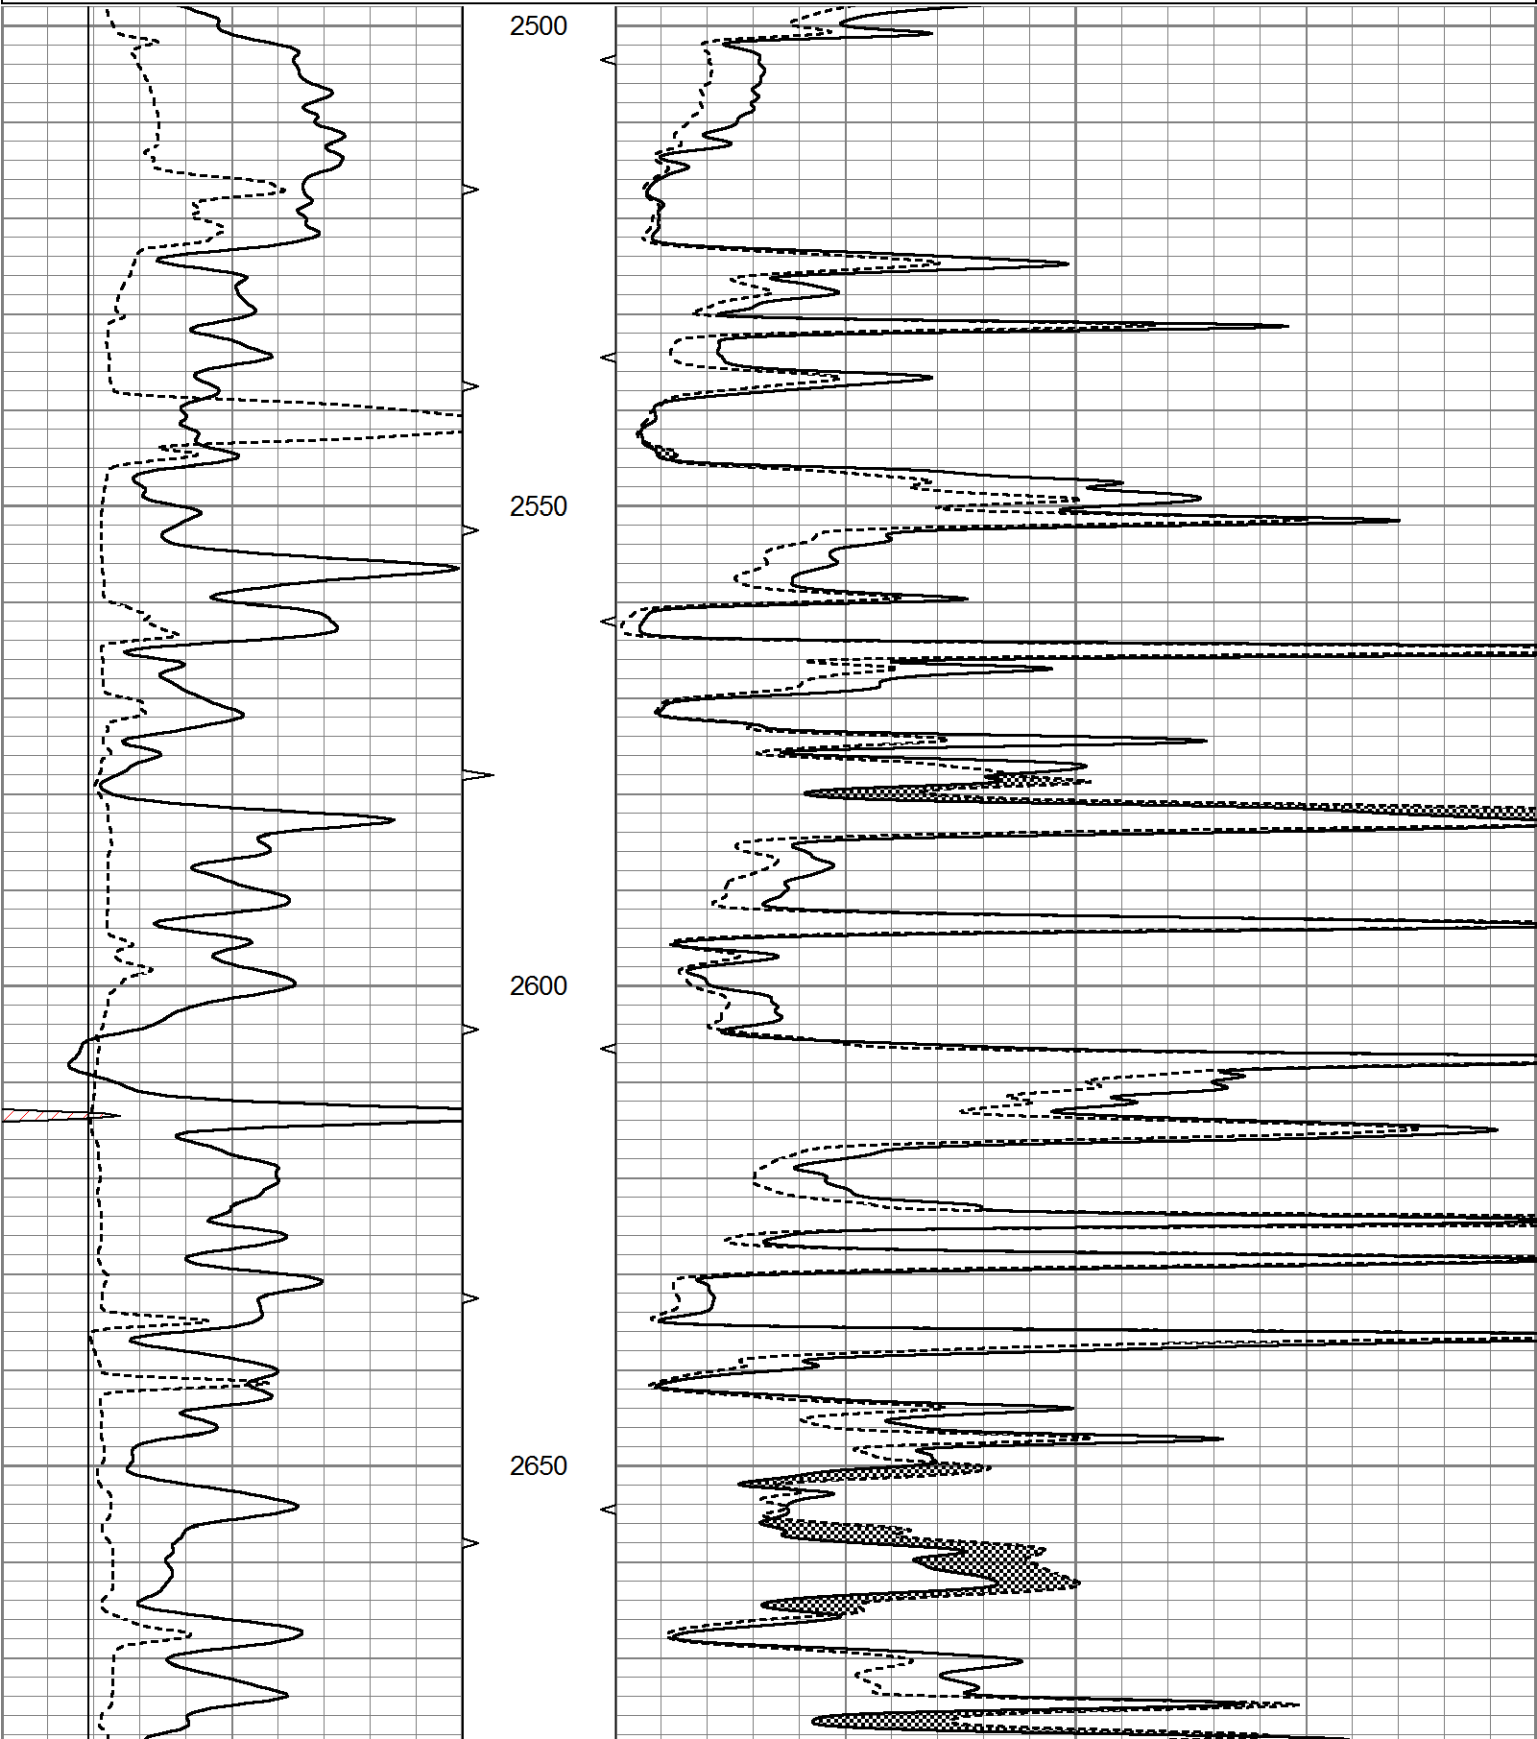


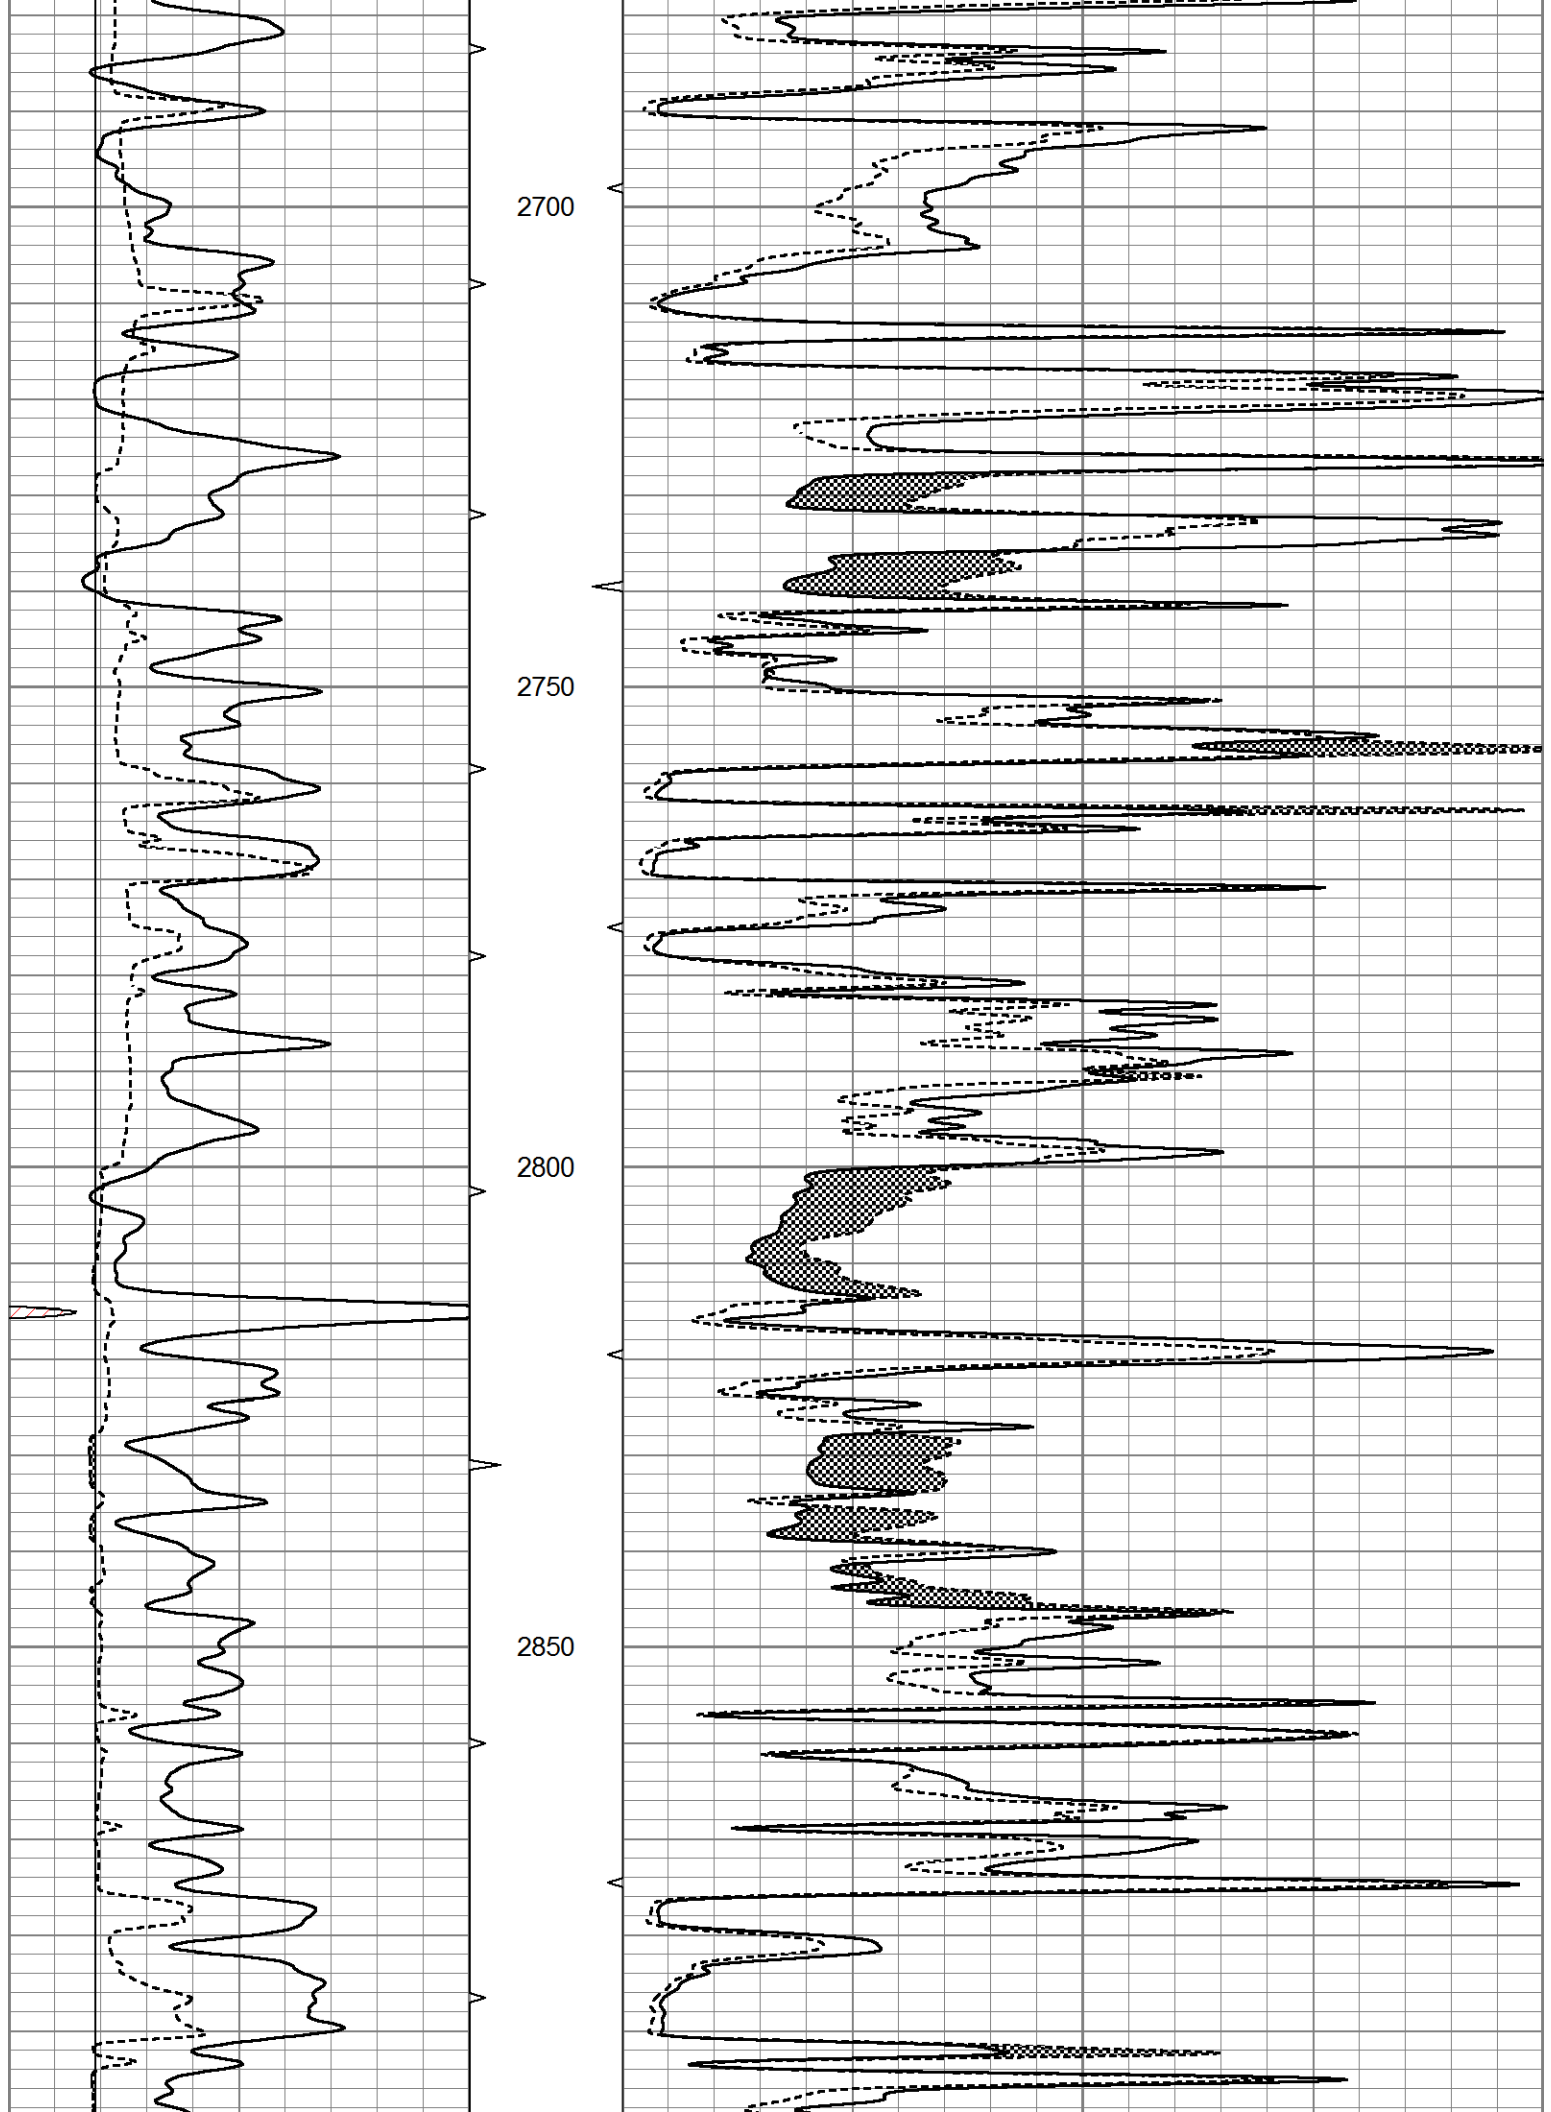


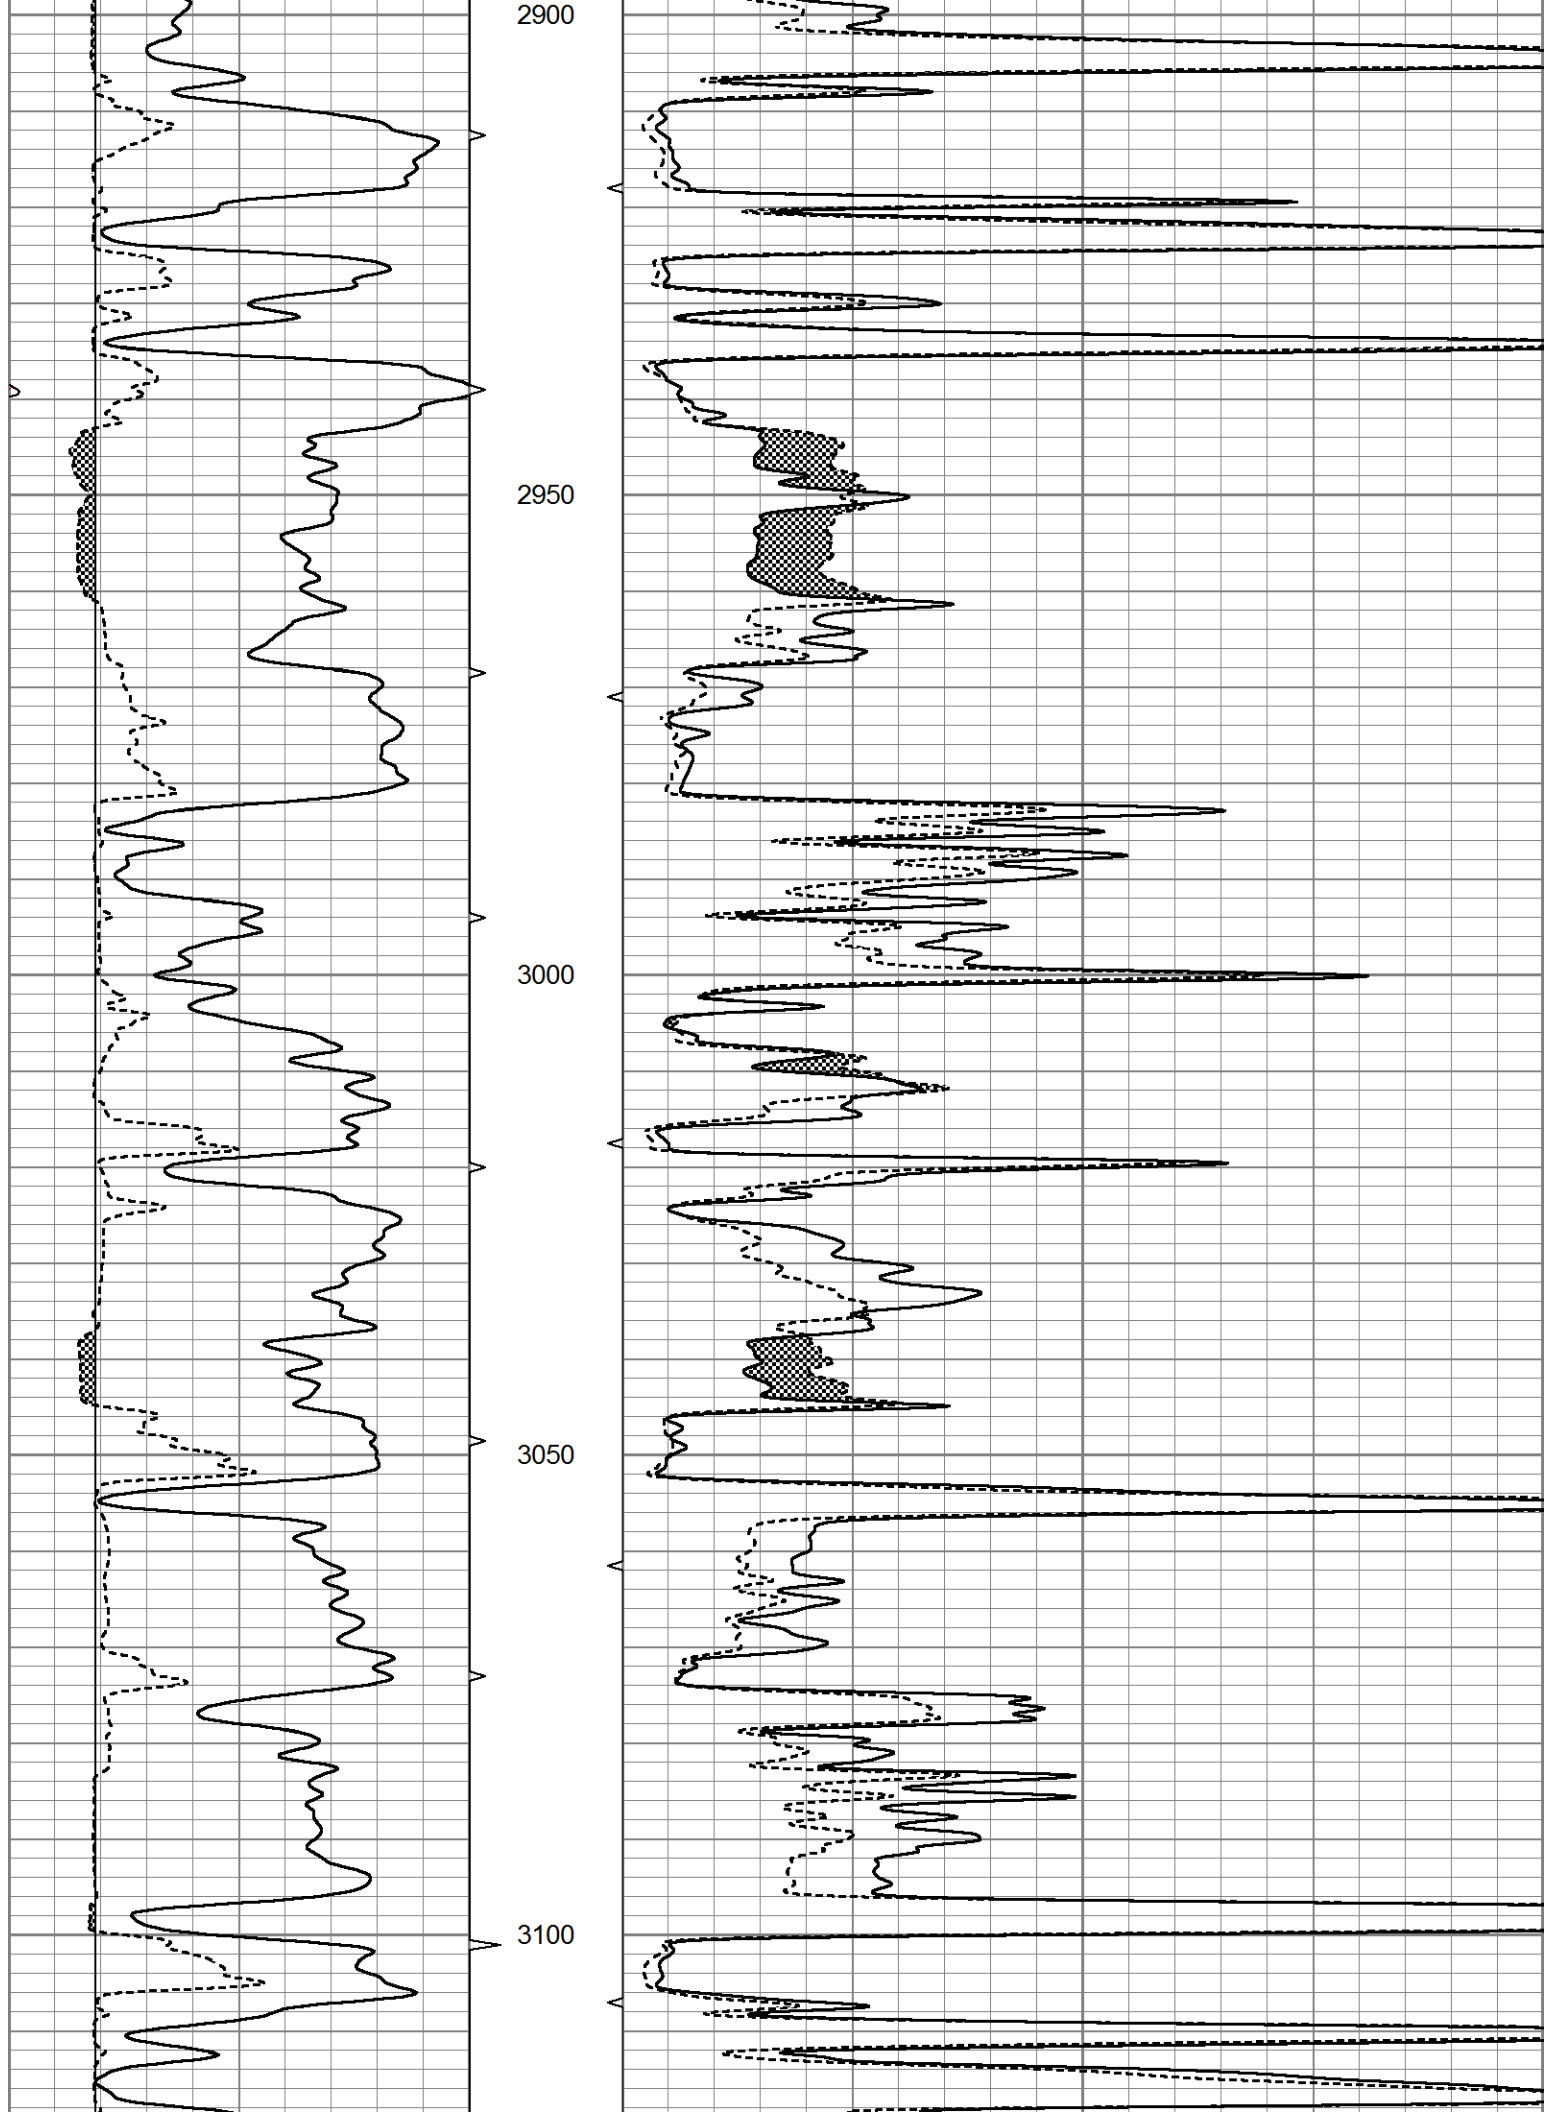


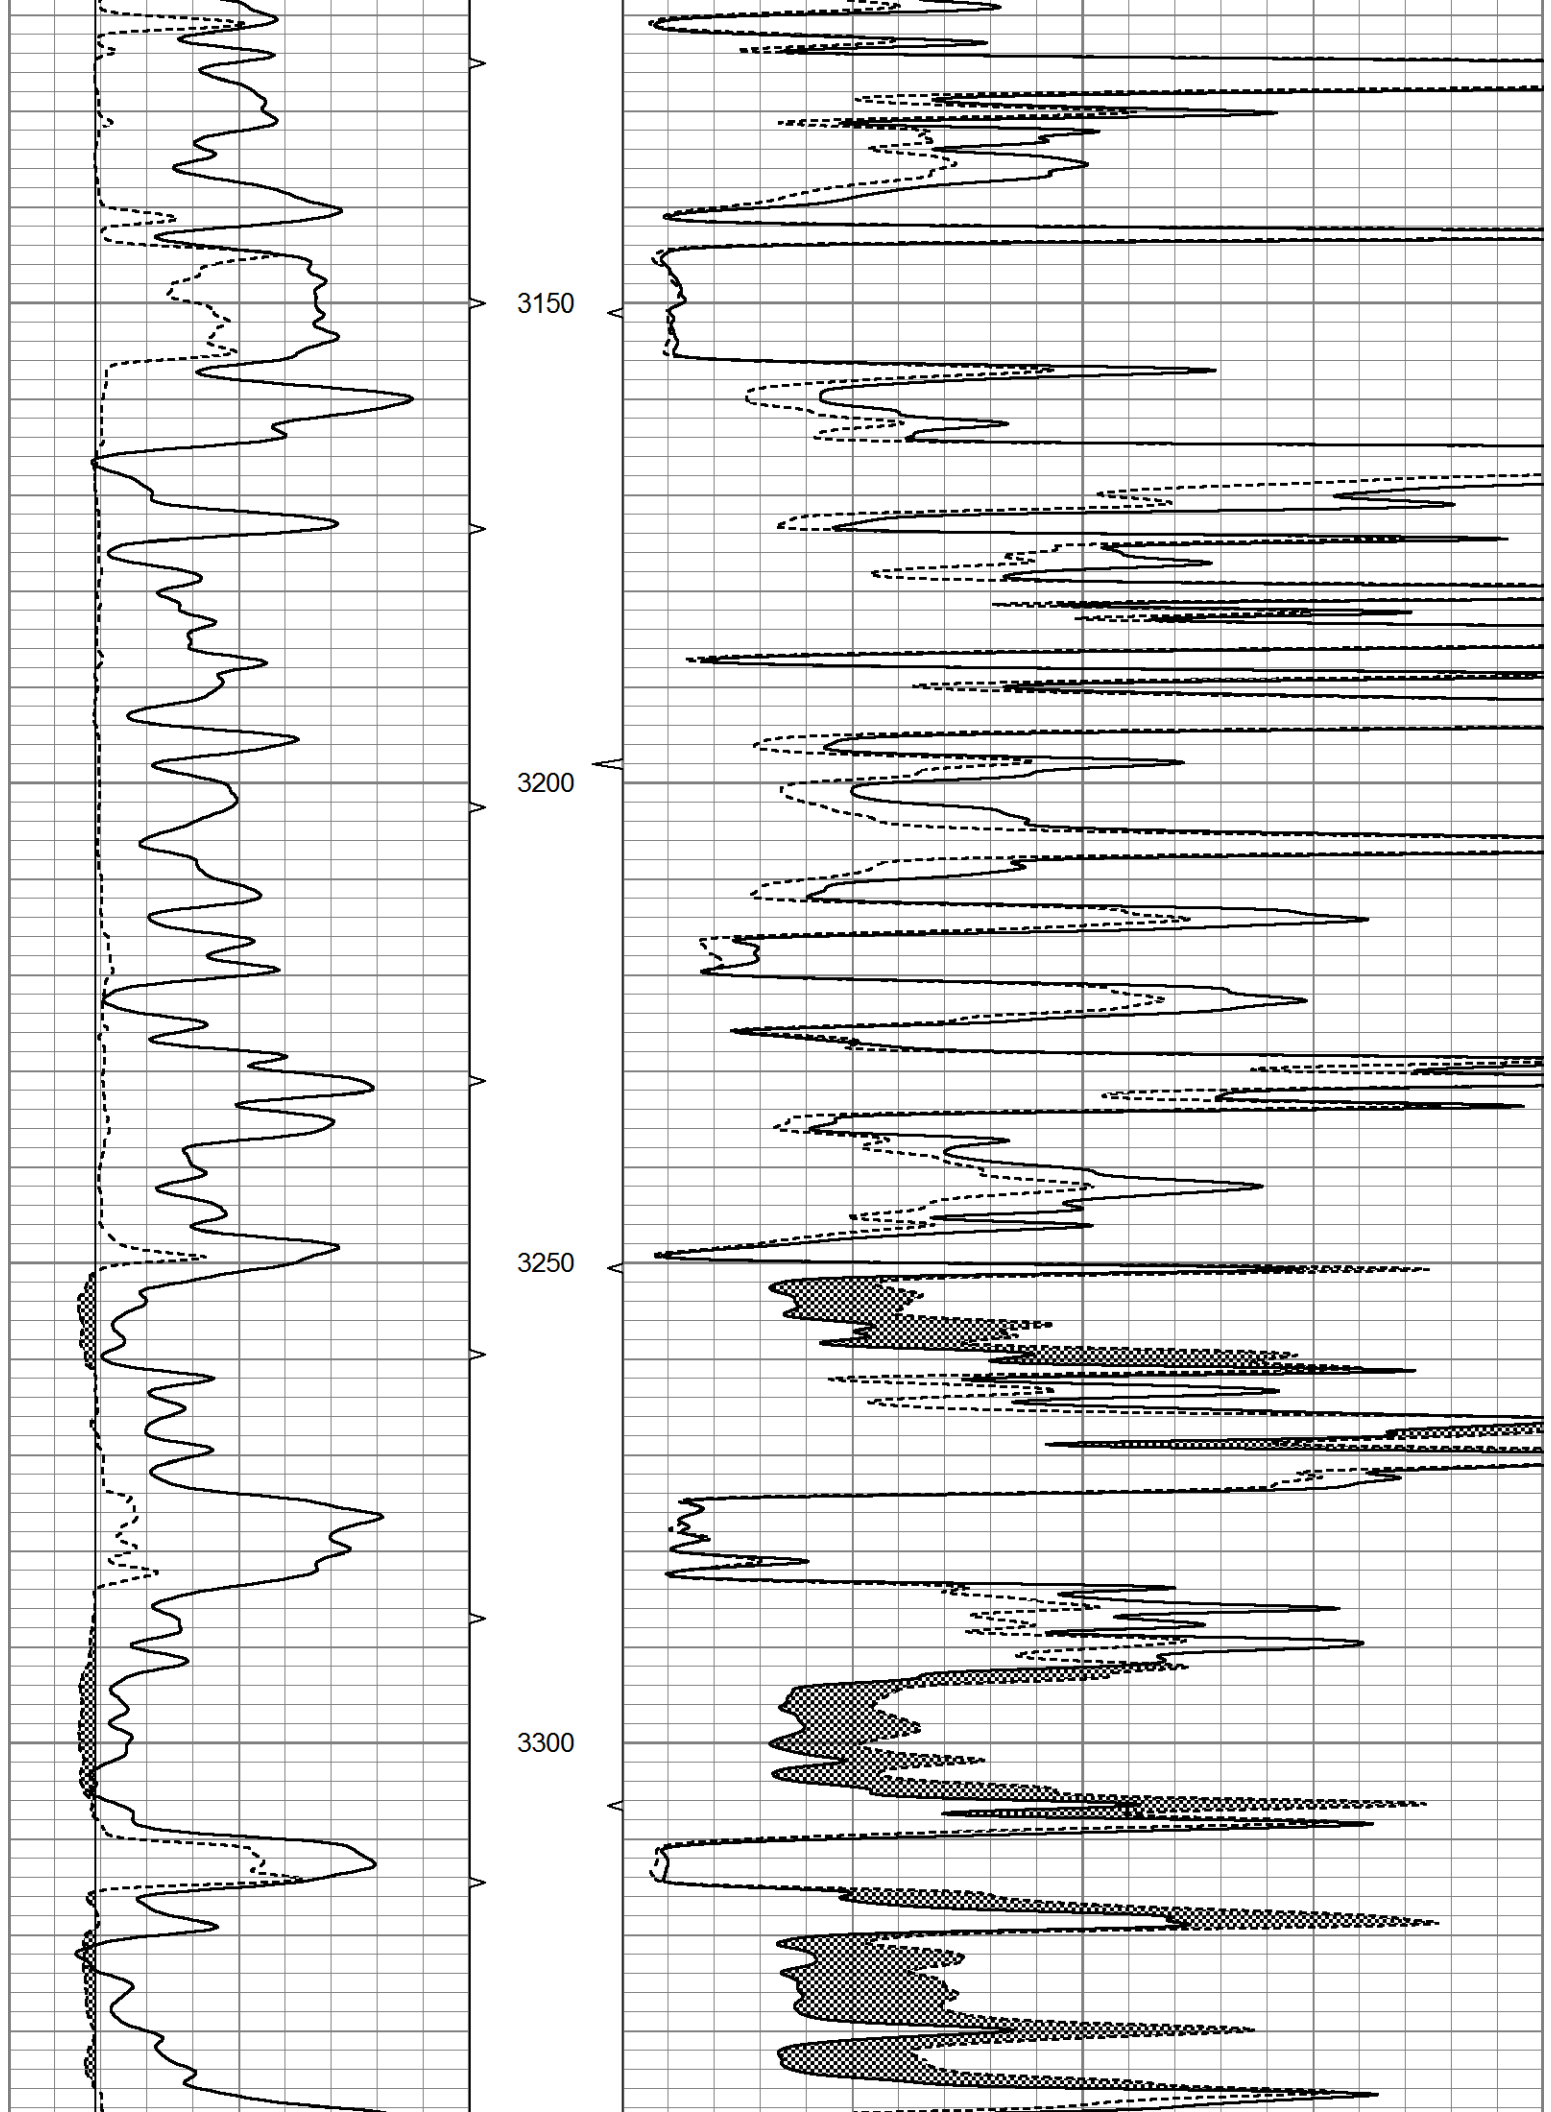


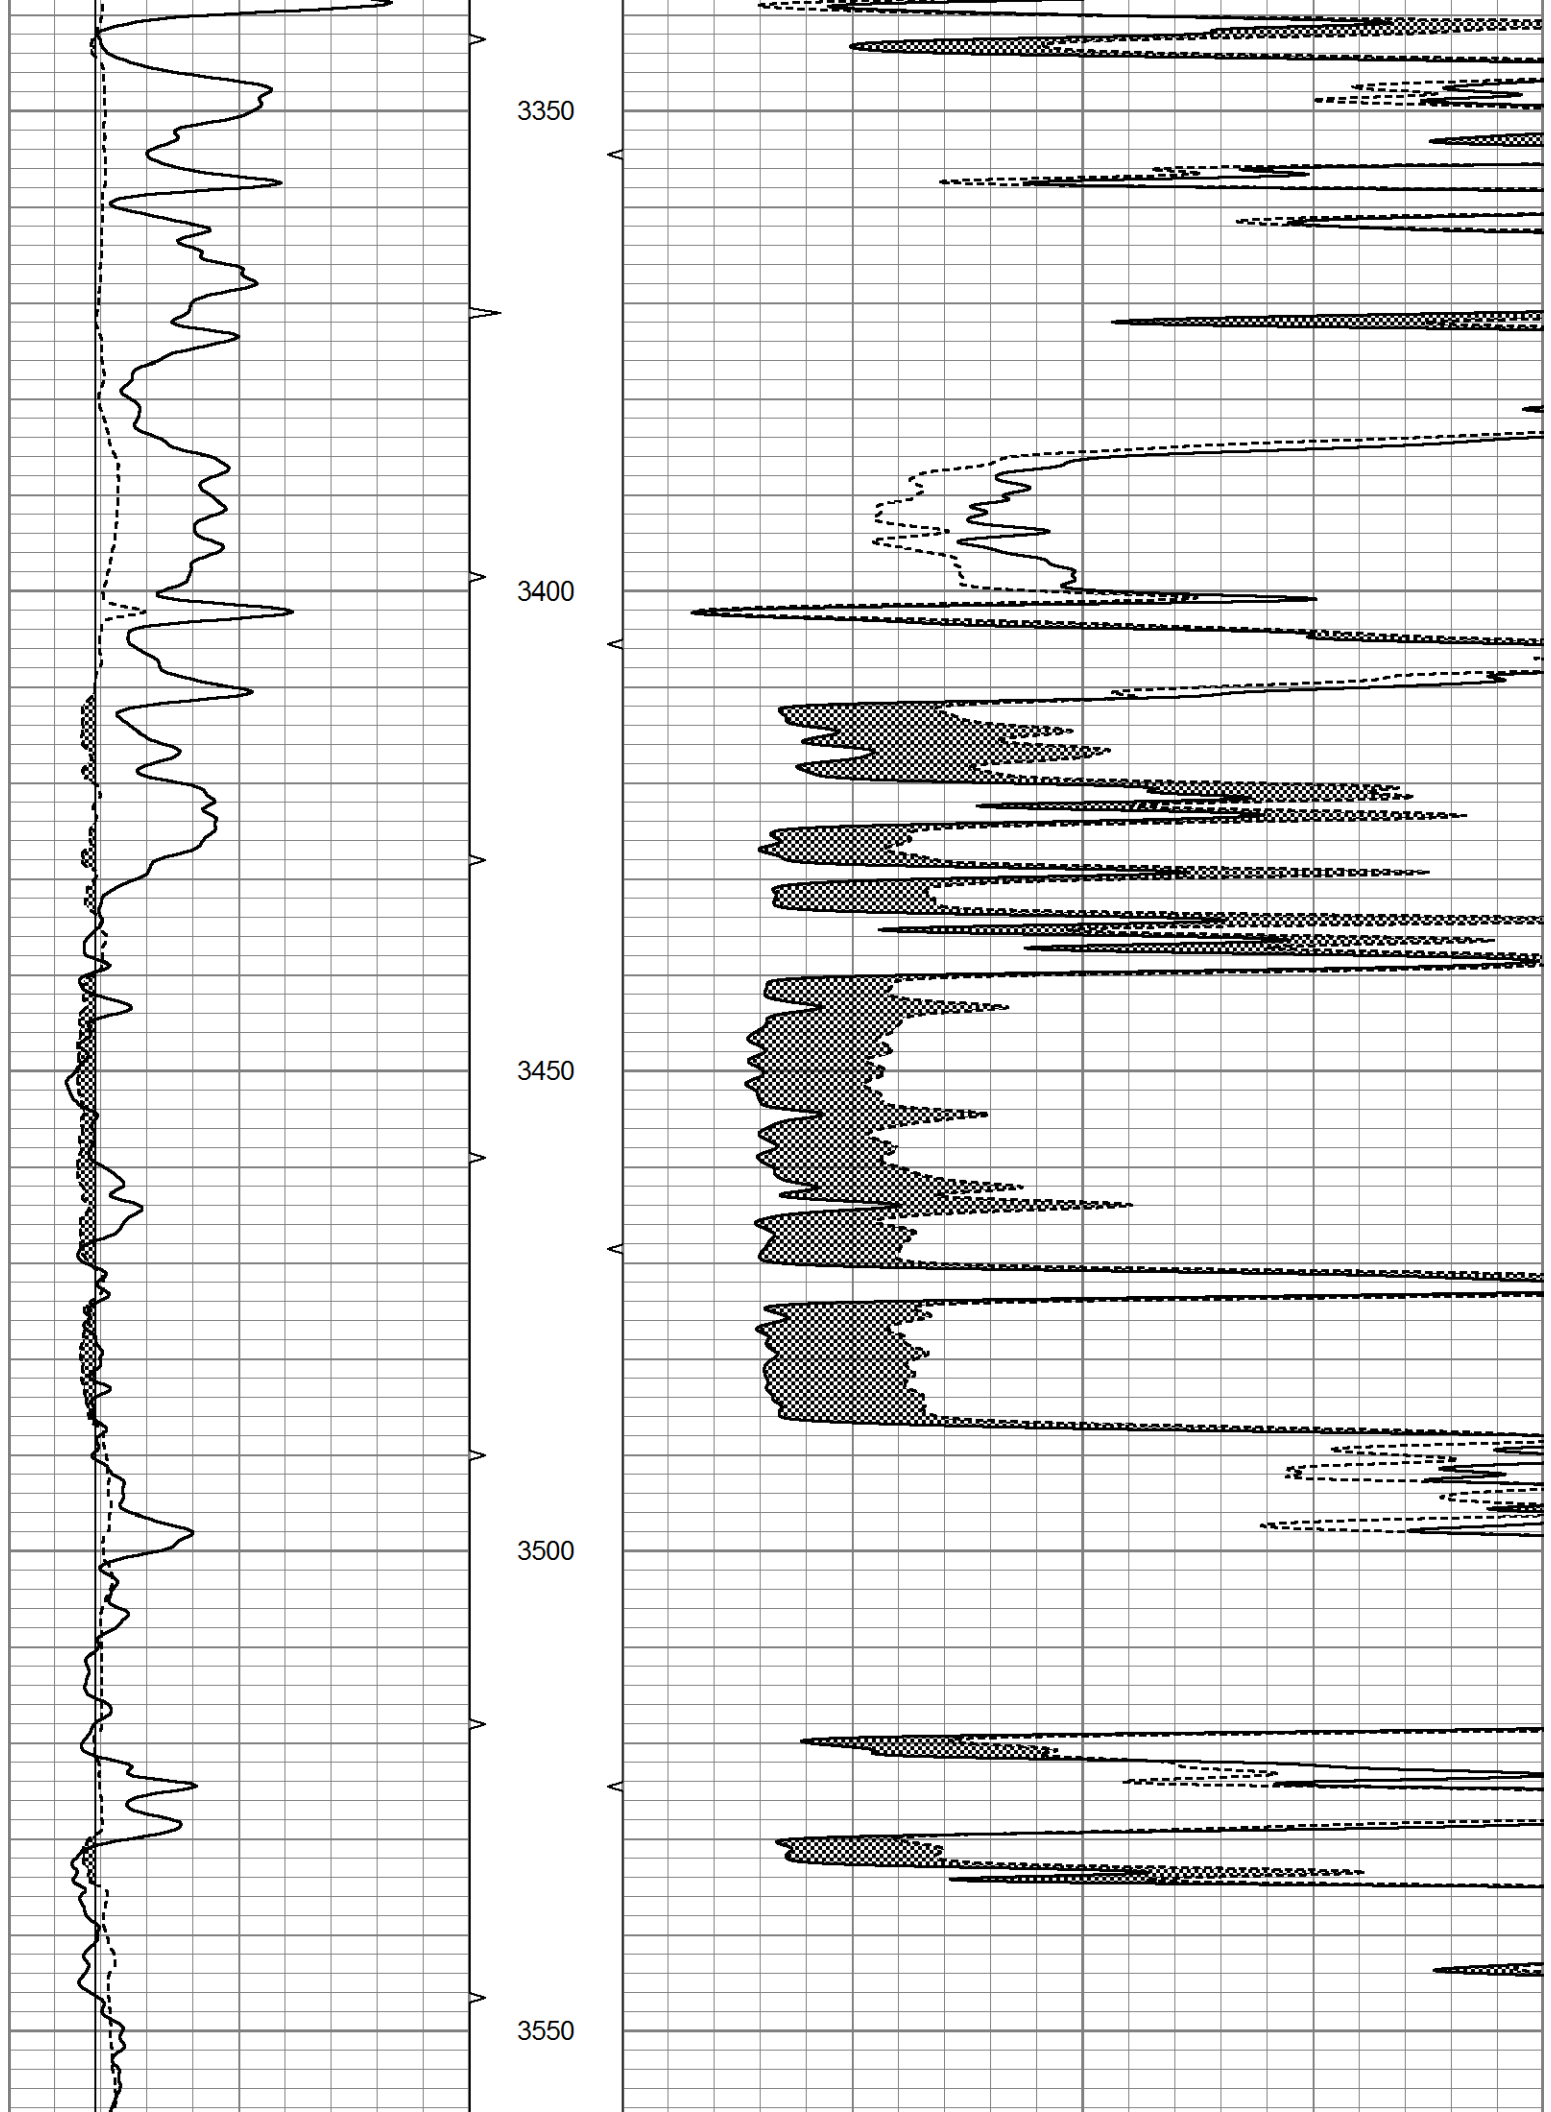

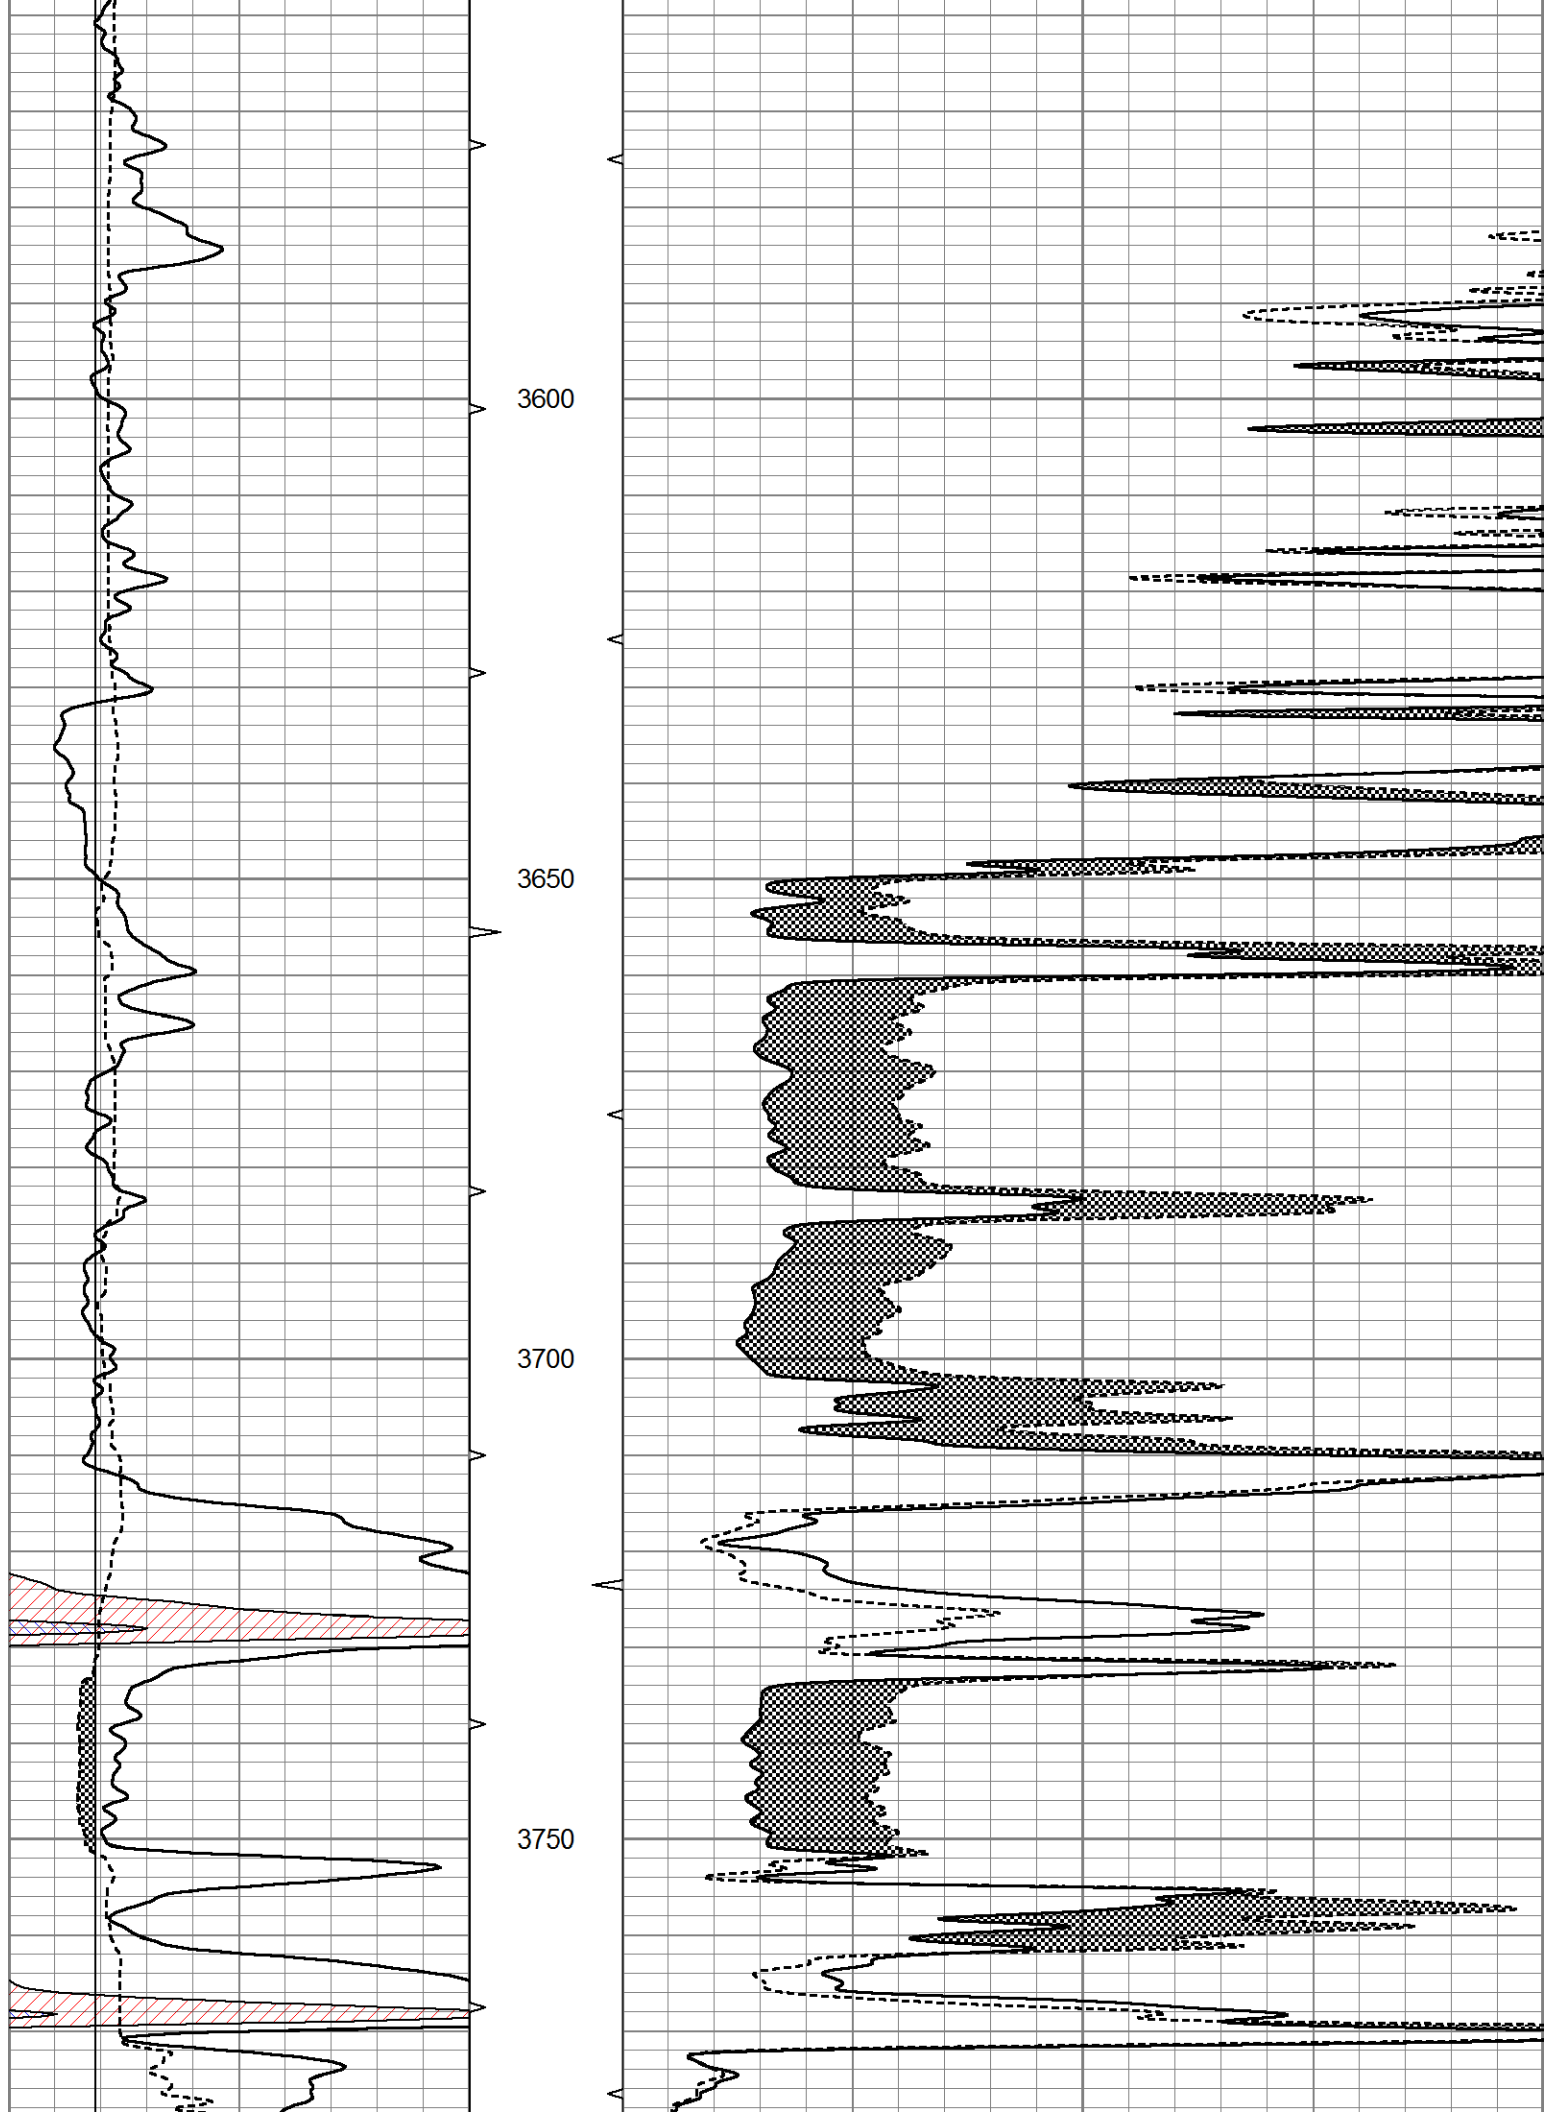

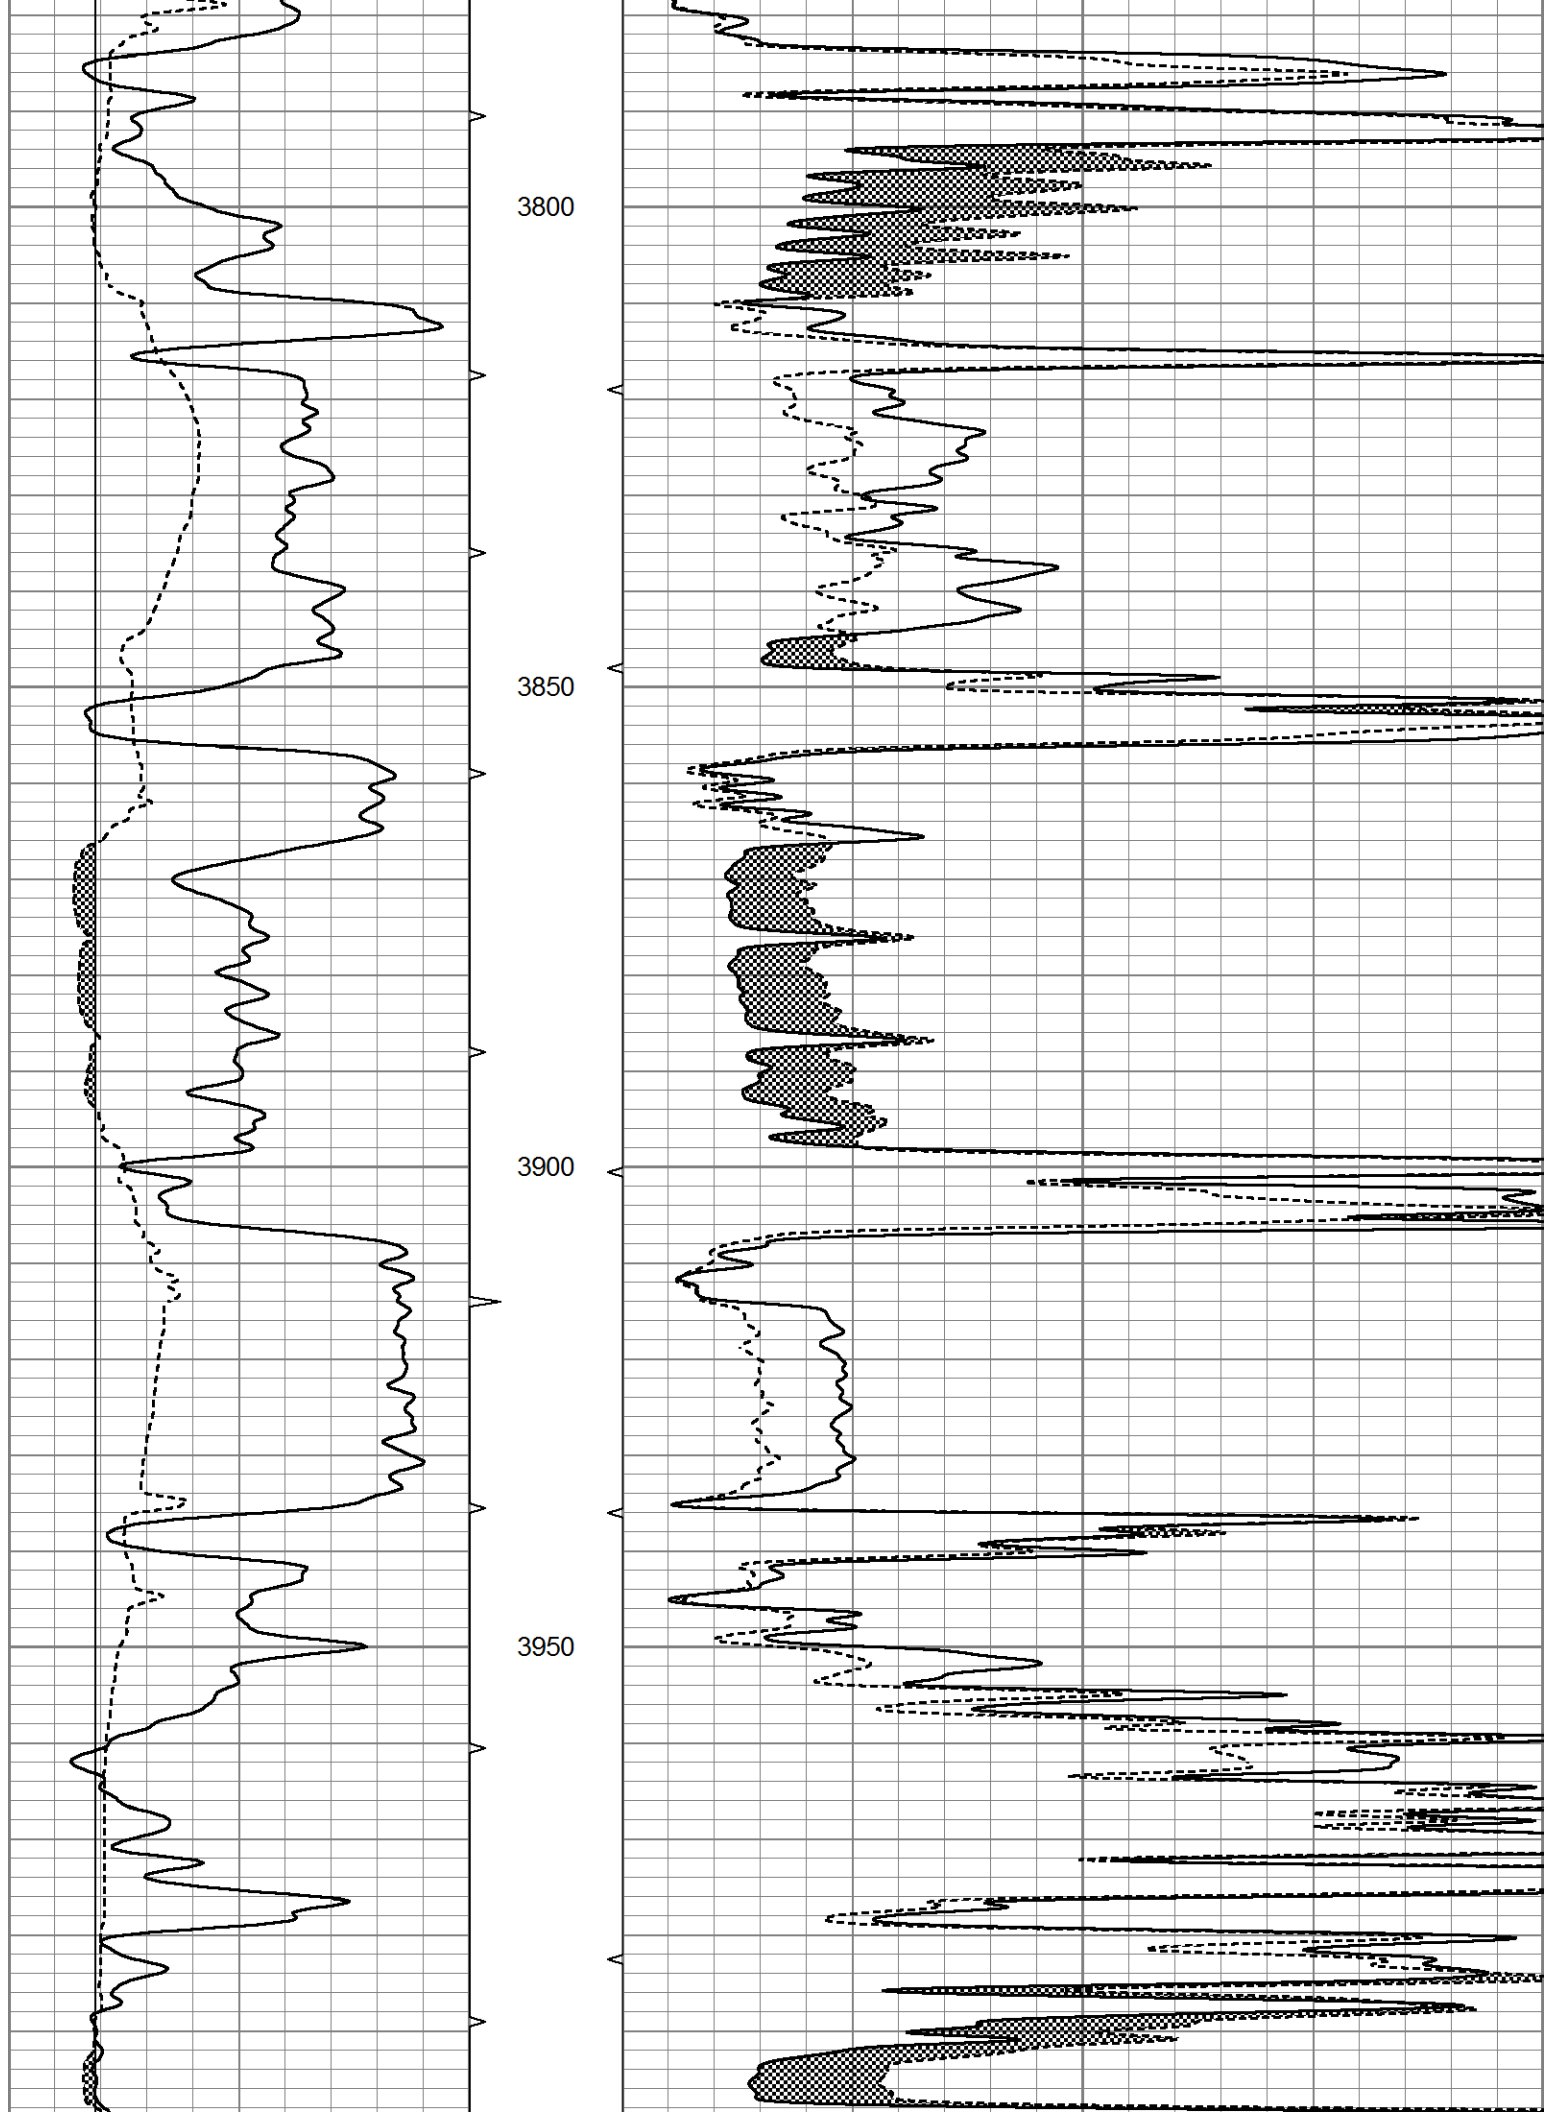

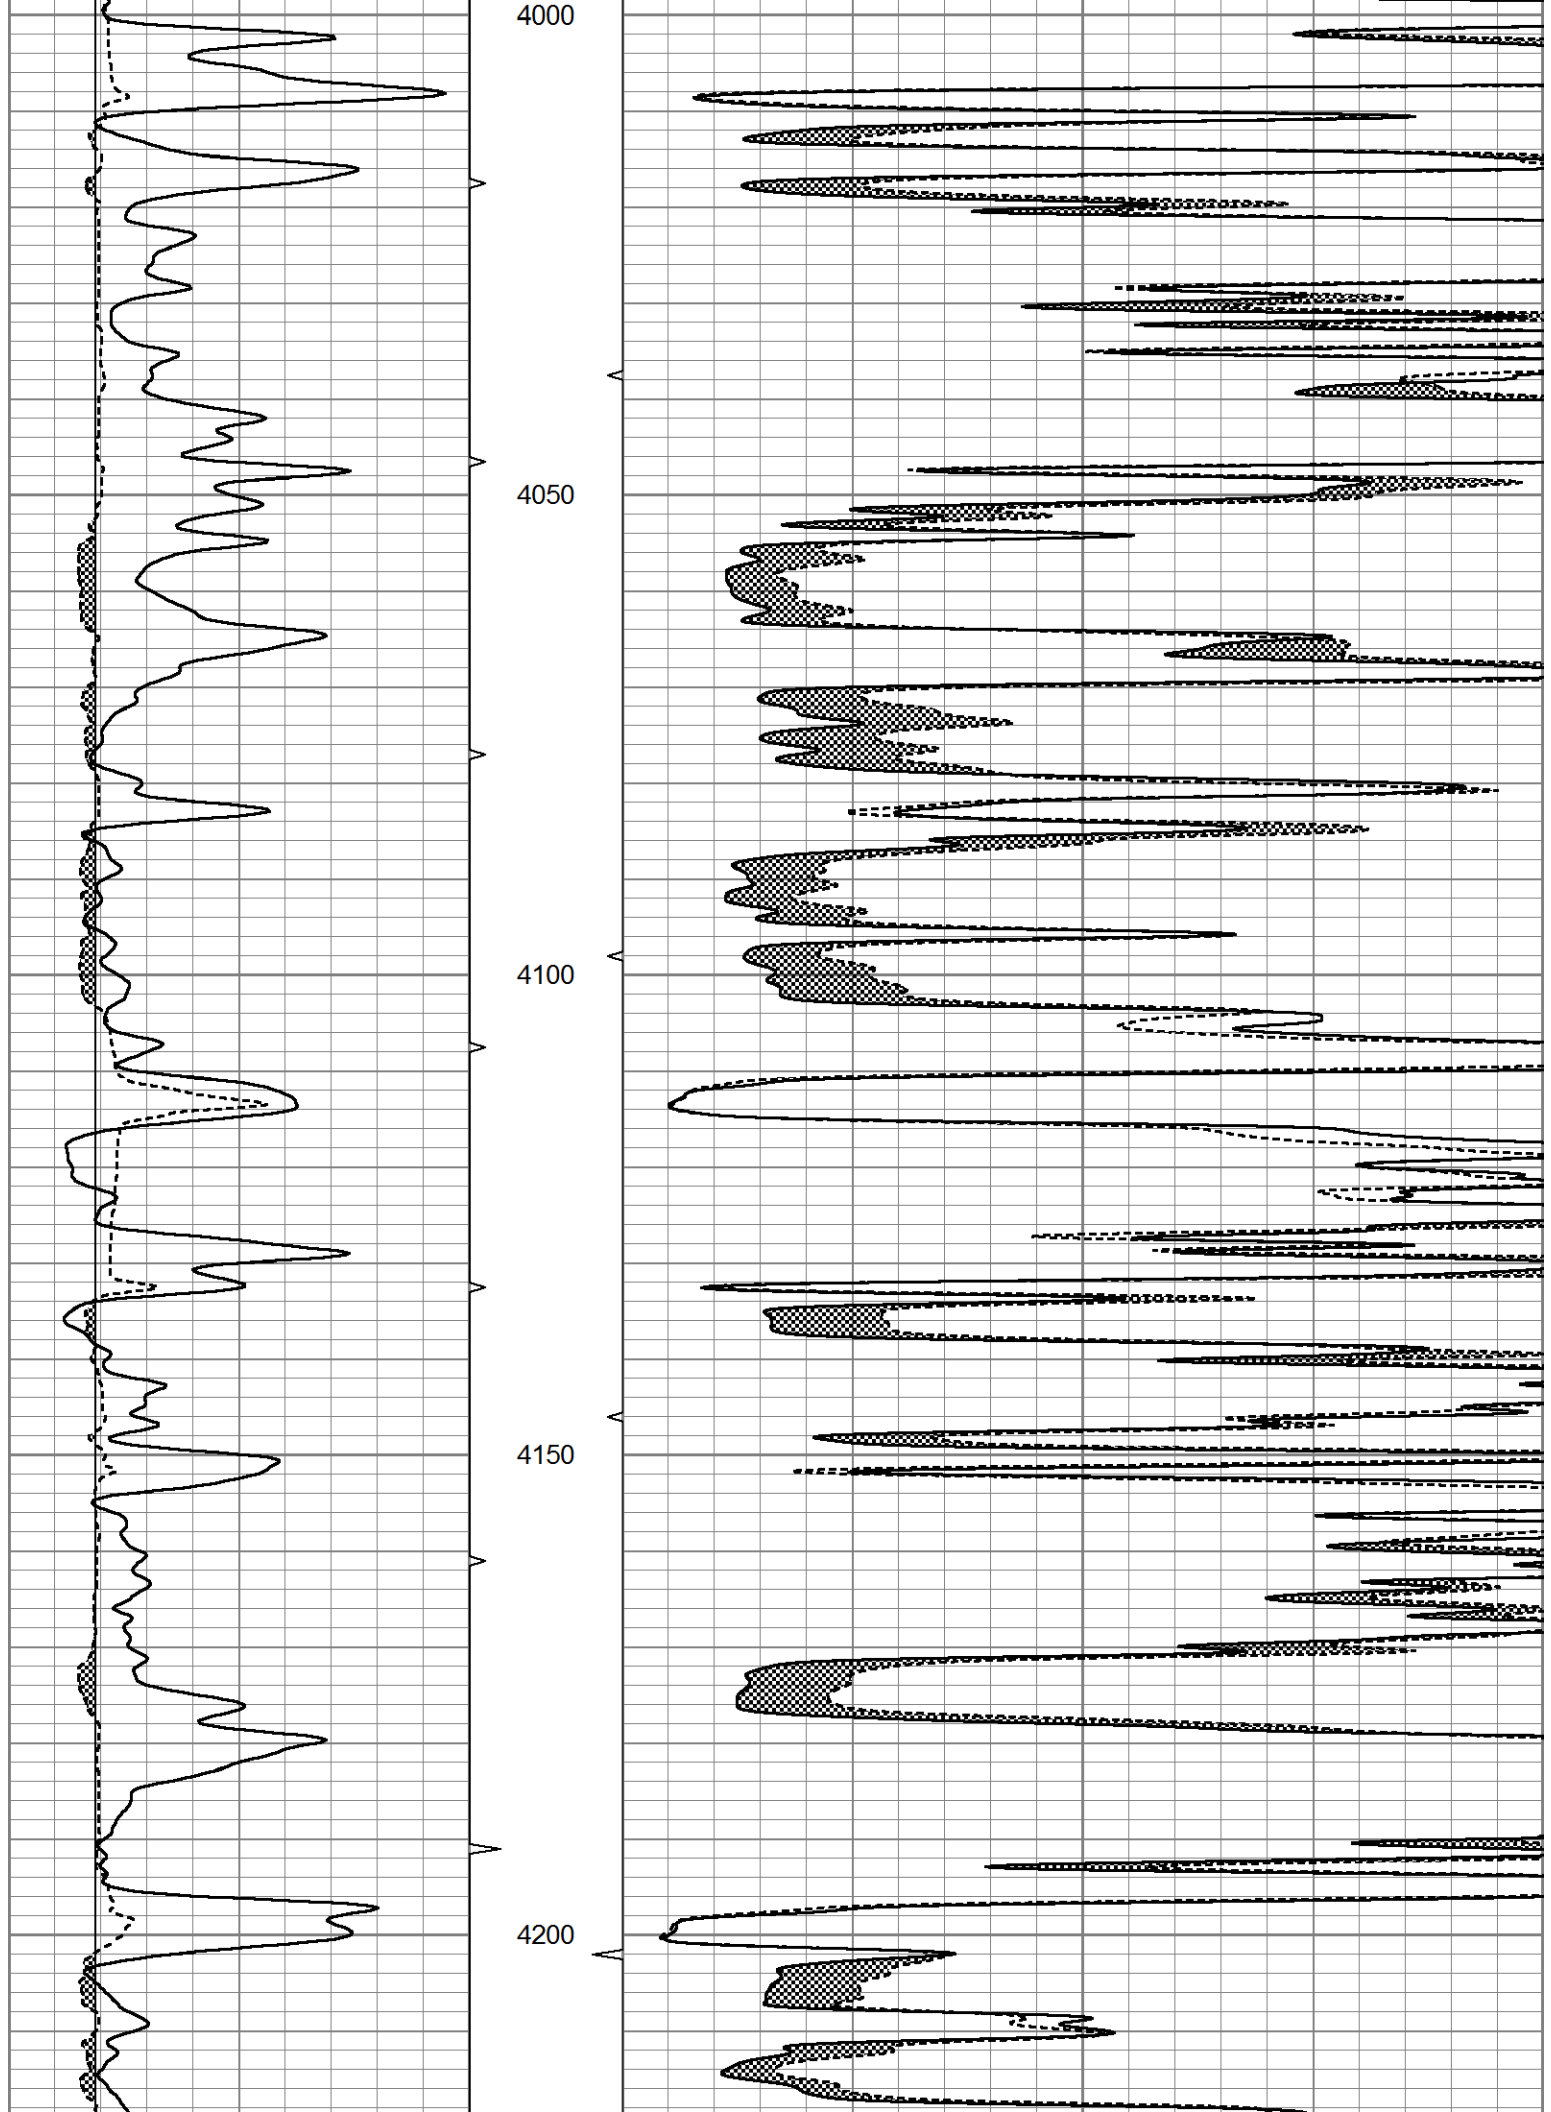

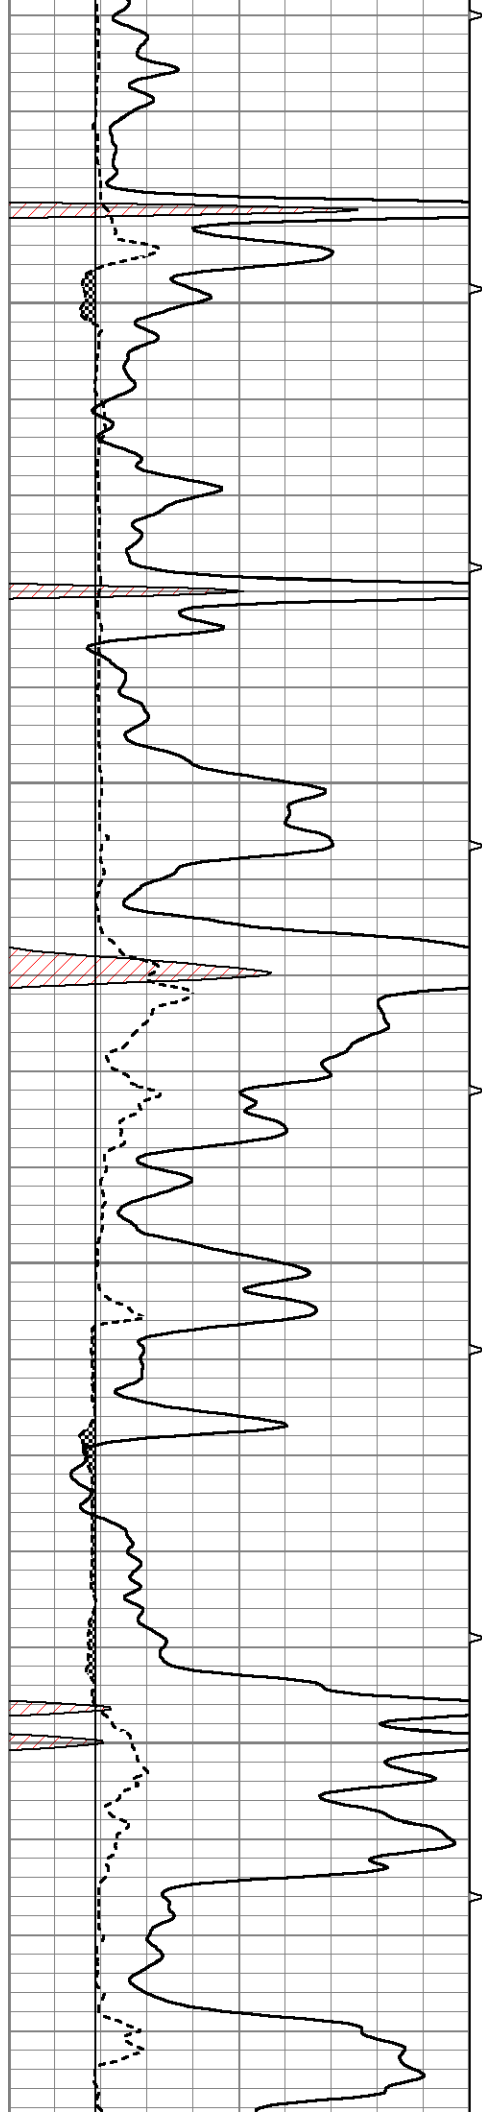



4250

4300

4350

4400

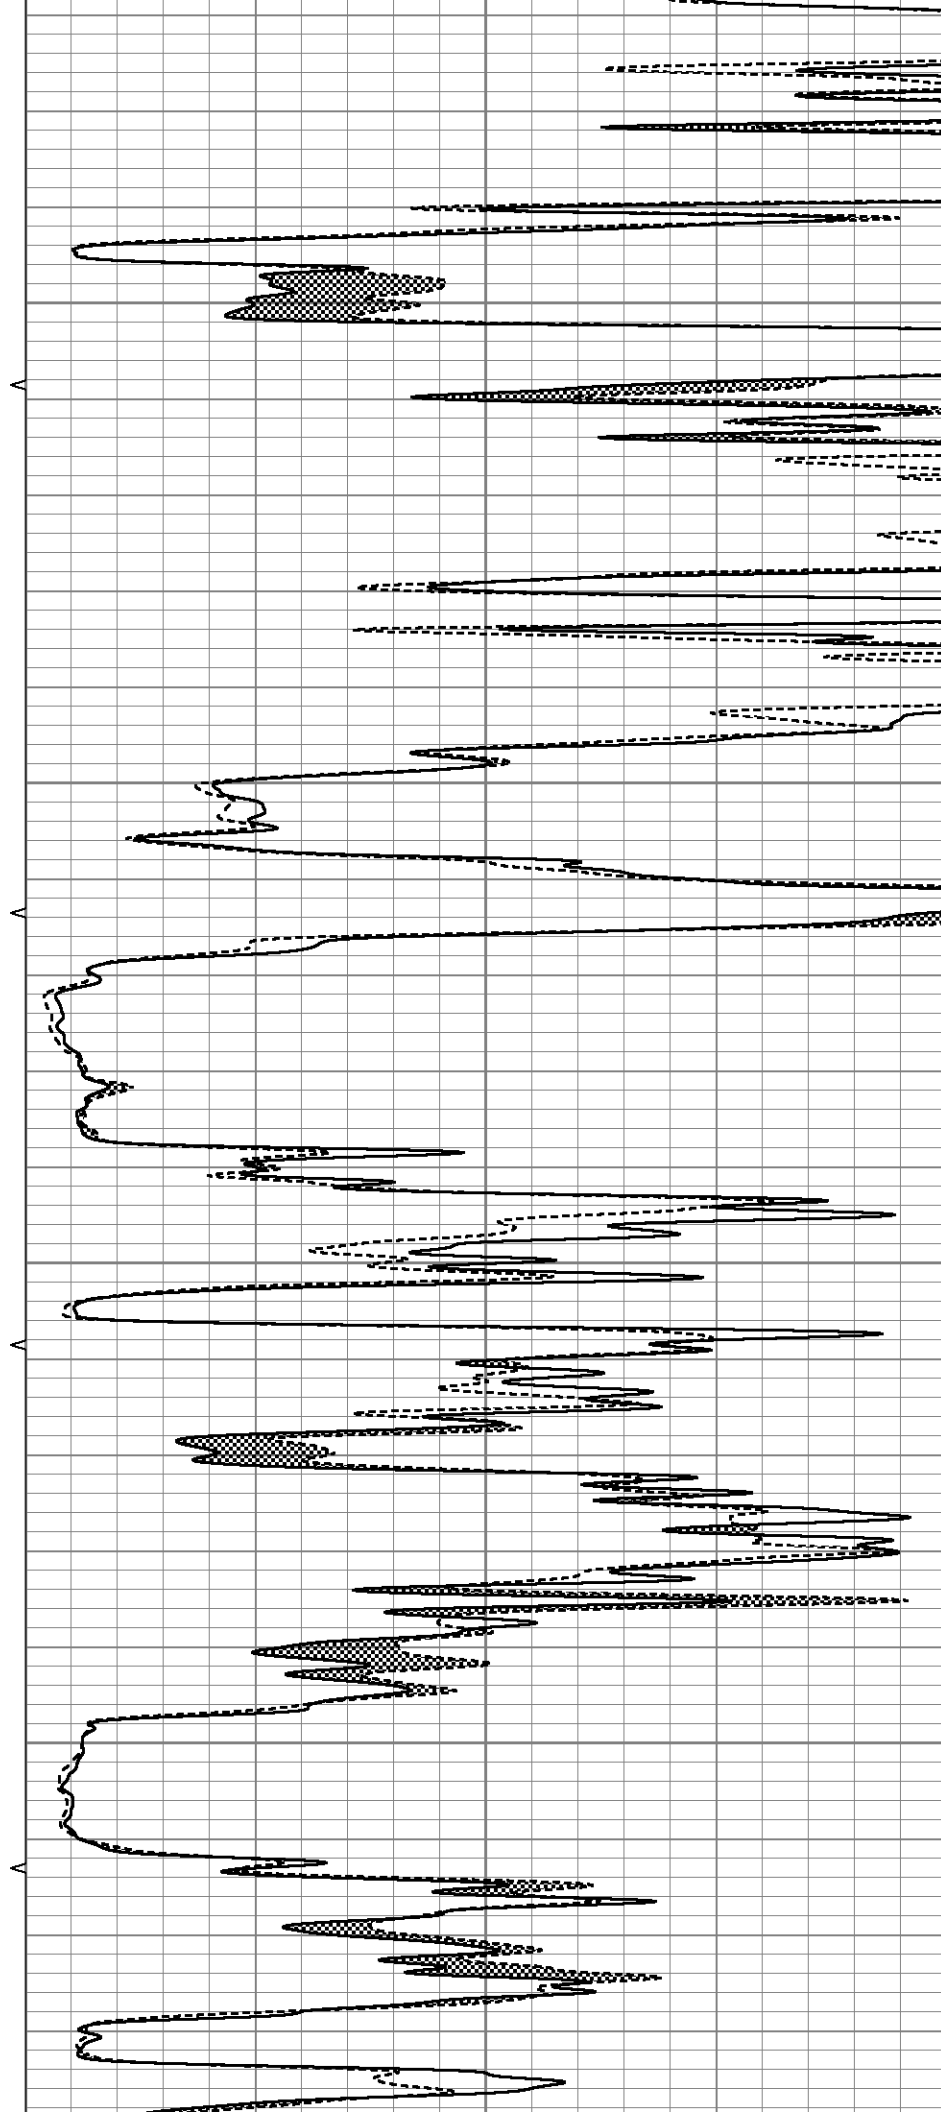

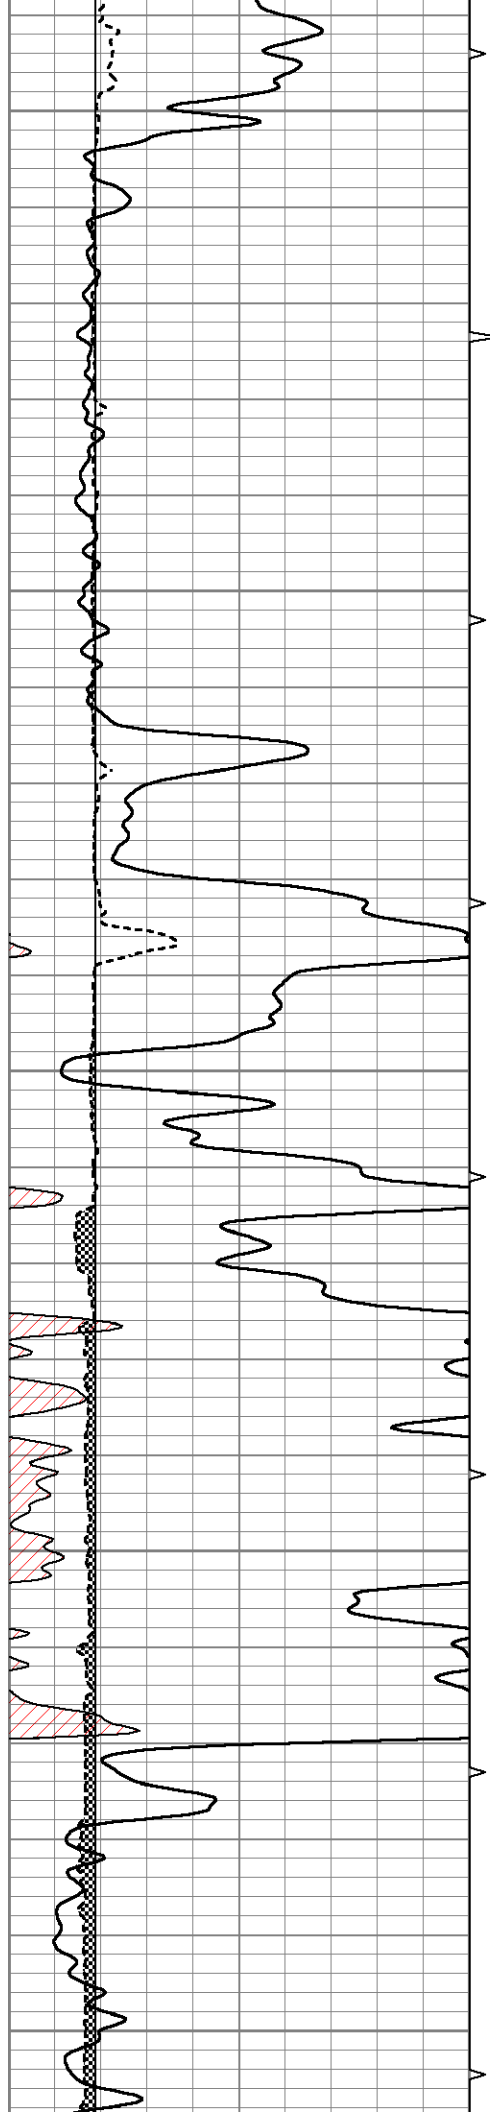


4450


4500

4550

4600

4650

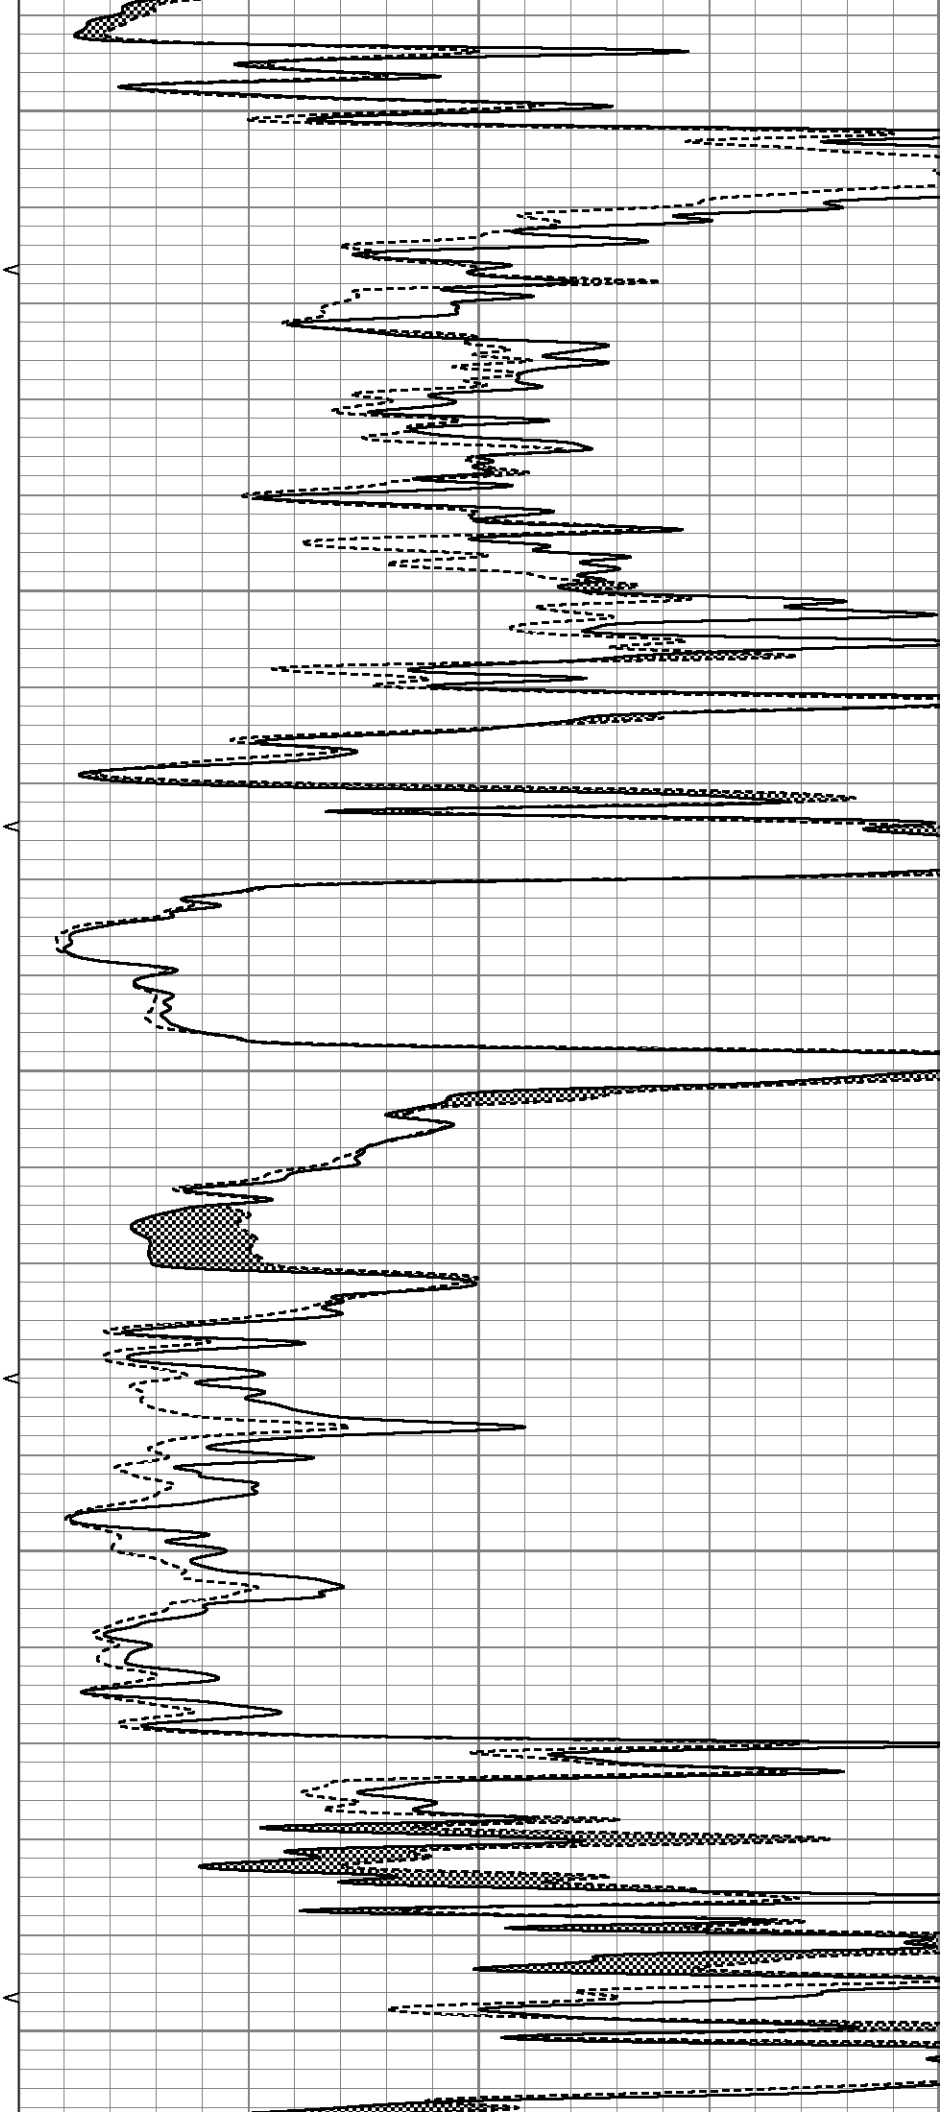

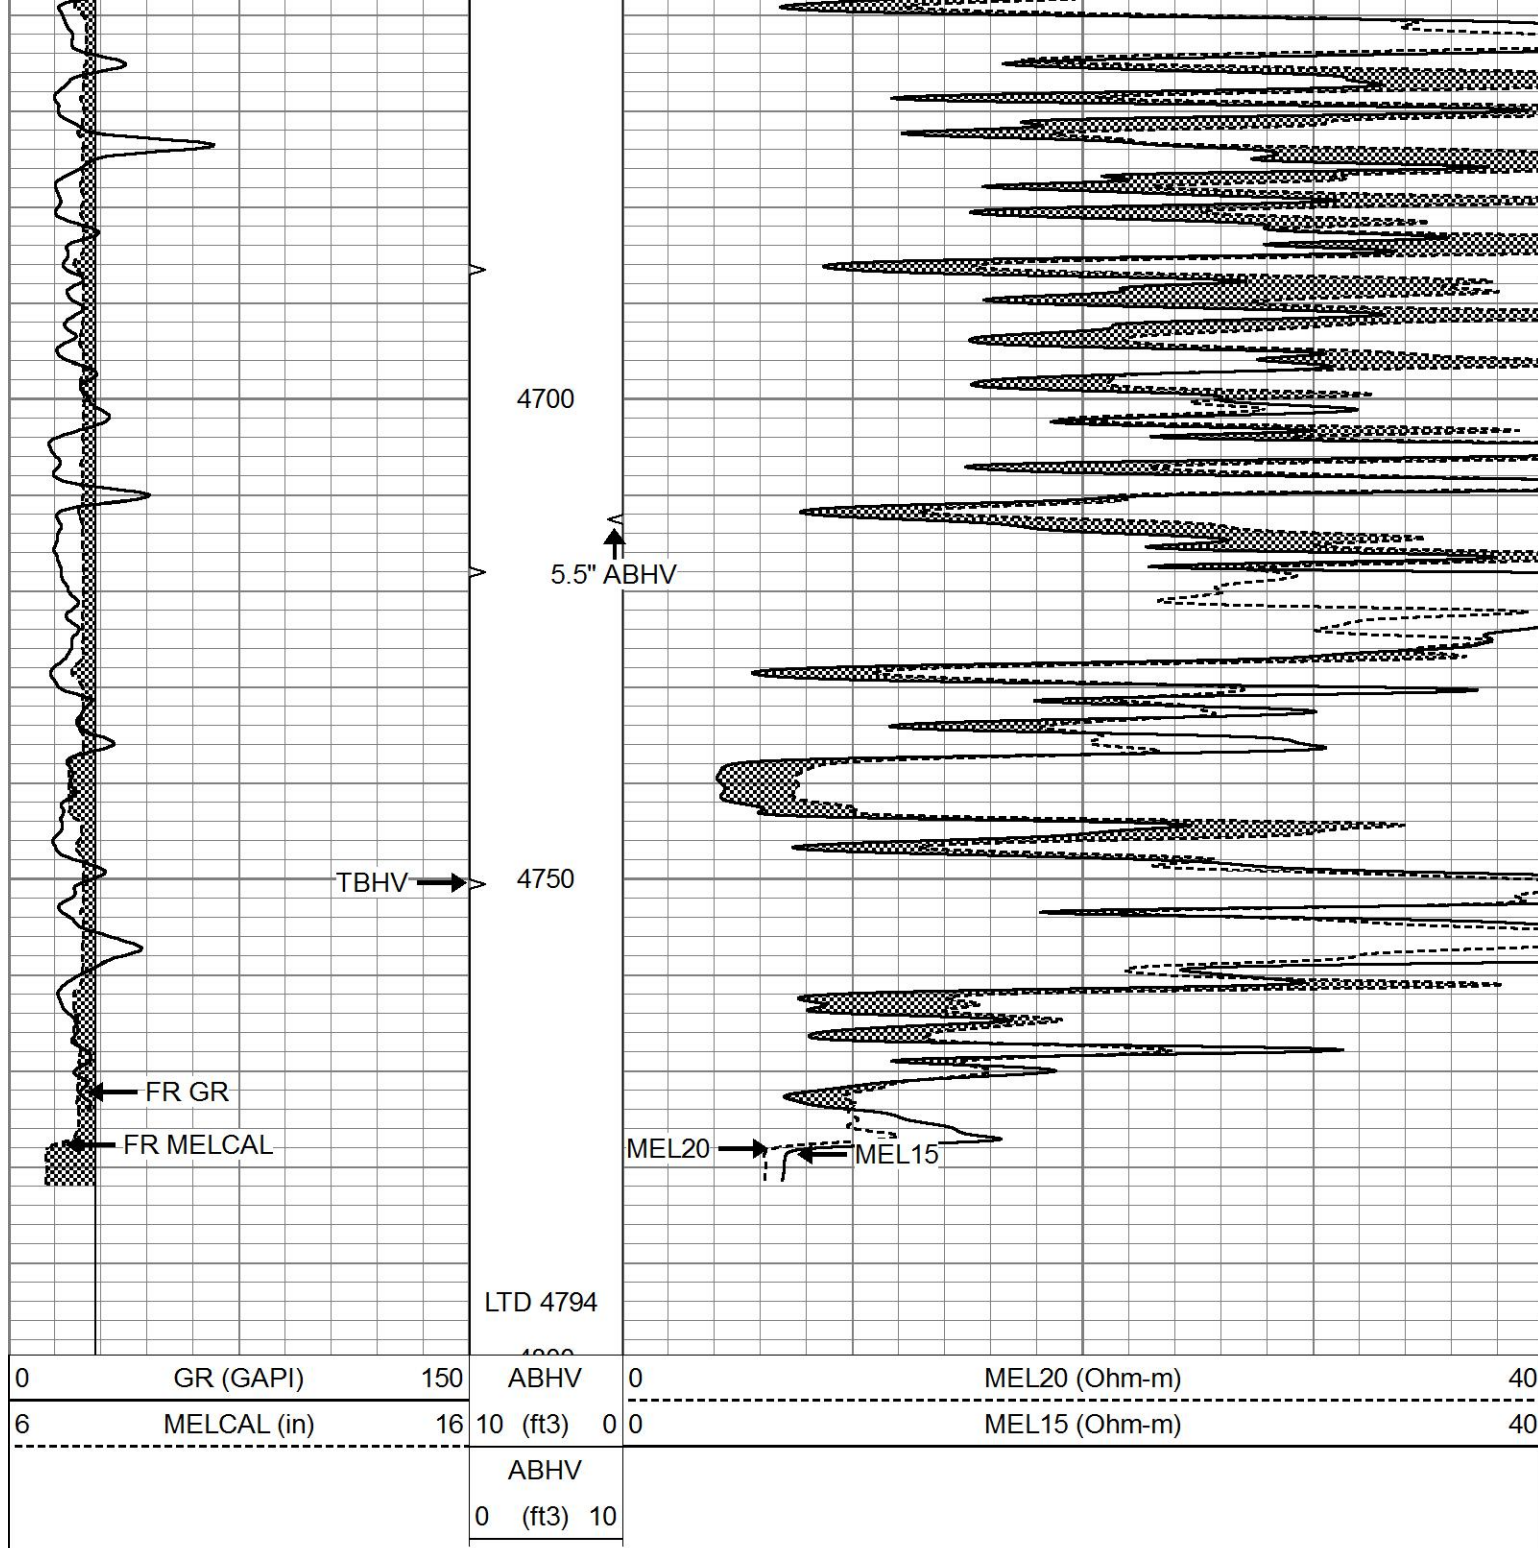


REPEAT SECTION

Database File 6907pe.db
 Dataset Pathname pass5.1
 Presentation Format micro
 Dataset Creation Sat Aug 20 08:59:07 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			

0 (ft3) 10

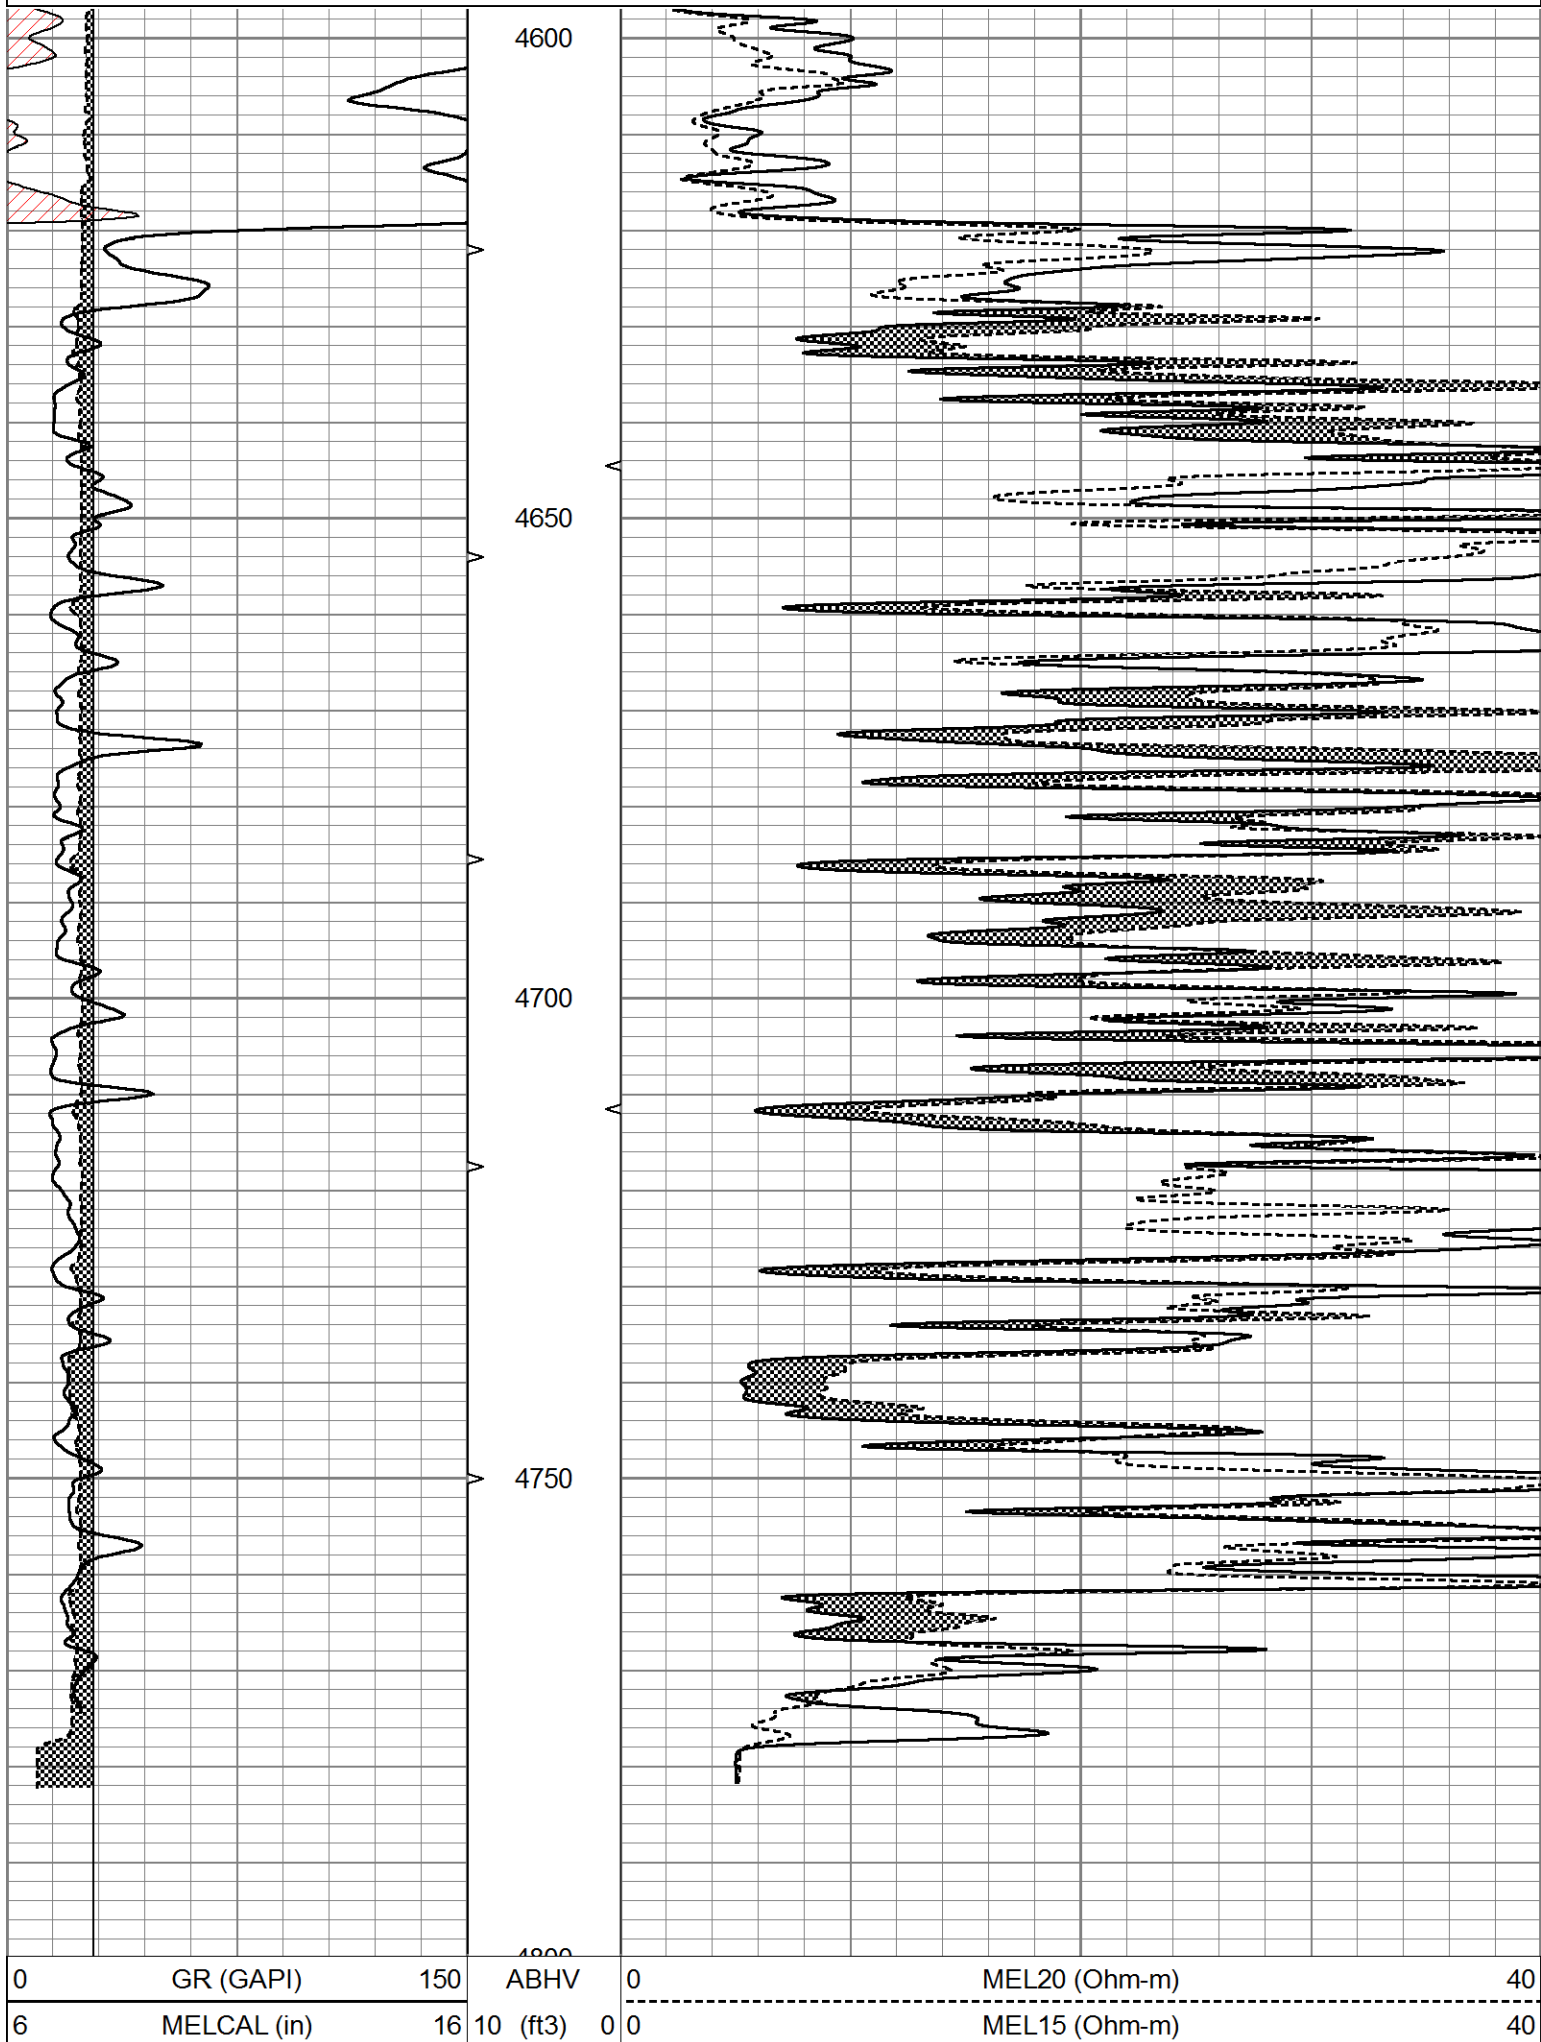

	ABHV	
	0 (ft3) 10	

Calibration Report			
Database File	6907pe.db		
Dataset Pathname	pass6.2		
Dataset Creation	Sat Aug 20 09:01:44 2022		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Sat Aug 20 07:28:08 2022		
Caliper Calibration:	Gain=4.706	Offset=0.471	
	Low Cal	High Cal	
References	8.000	16.000	
Readings	1.600	3.300	
1.5" Calibration:	Gain=38.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.000	1.216	
2" Calibration:	Gain=70.000	Offset=-1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.053	
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN_GR		
Performed:	Sat Aug 20 07:22:06 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3200	GAPI/cps	