



MICRO LOG

Company BLUERIDGE PETROLEUM CORPORATION
Well SAPPACREEK #2-1
Field POLLNOW SOUTHEAST
County DECATUR State KANSAS

Location: API #: 15-039-21290-0000
430' FSL & 249' FWL
NE - SE - SE - SW
Permanent Datum GROUND LEVEL Elevation 2547
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CDL/CNL/PE
DIL/SONIC
Elevation
K.B. 2555
D.F. 2553
G.L. 2547

Date	11/23/22		
Run Number	TWO		
Depth Driller	3765		
Depth Logger	3768		
Bottom Logged Interval	3752		
Top Log Interval	3200		
Casing Driller	8 5/8" @ 221'		
Casing Logger	222		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 2,000 PPM	
Density / Viscosity	9.1/62		
pH / Fluid Loss	10.5/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.50 @ 70F		
Rmf @ Meas. Temp	1.13 @ 70F		
Rmc @ Meas. Temp	1.80 @ 70F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.929 @ 113F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	1:30 A.M.		
Maximum Recorded Temperature	113F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
OBERLIN, KS., (HWY 83 AND SE HALL ST.) 4 BLOCKS EAST TO STOP LIGHT, 1 BLOCK SOUTH,
EAST ON NORTH SIDE OF ELEVATOR 1/4 MILE, S. INTO




MAIN SECTION

Database File	6803pe.db
Dataset Pathname	pass6.5
Presentation Format	_micro
Dataset Creation	Wed Nov 23 02:06:36 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

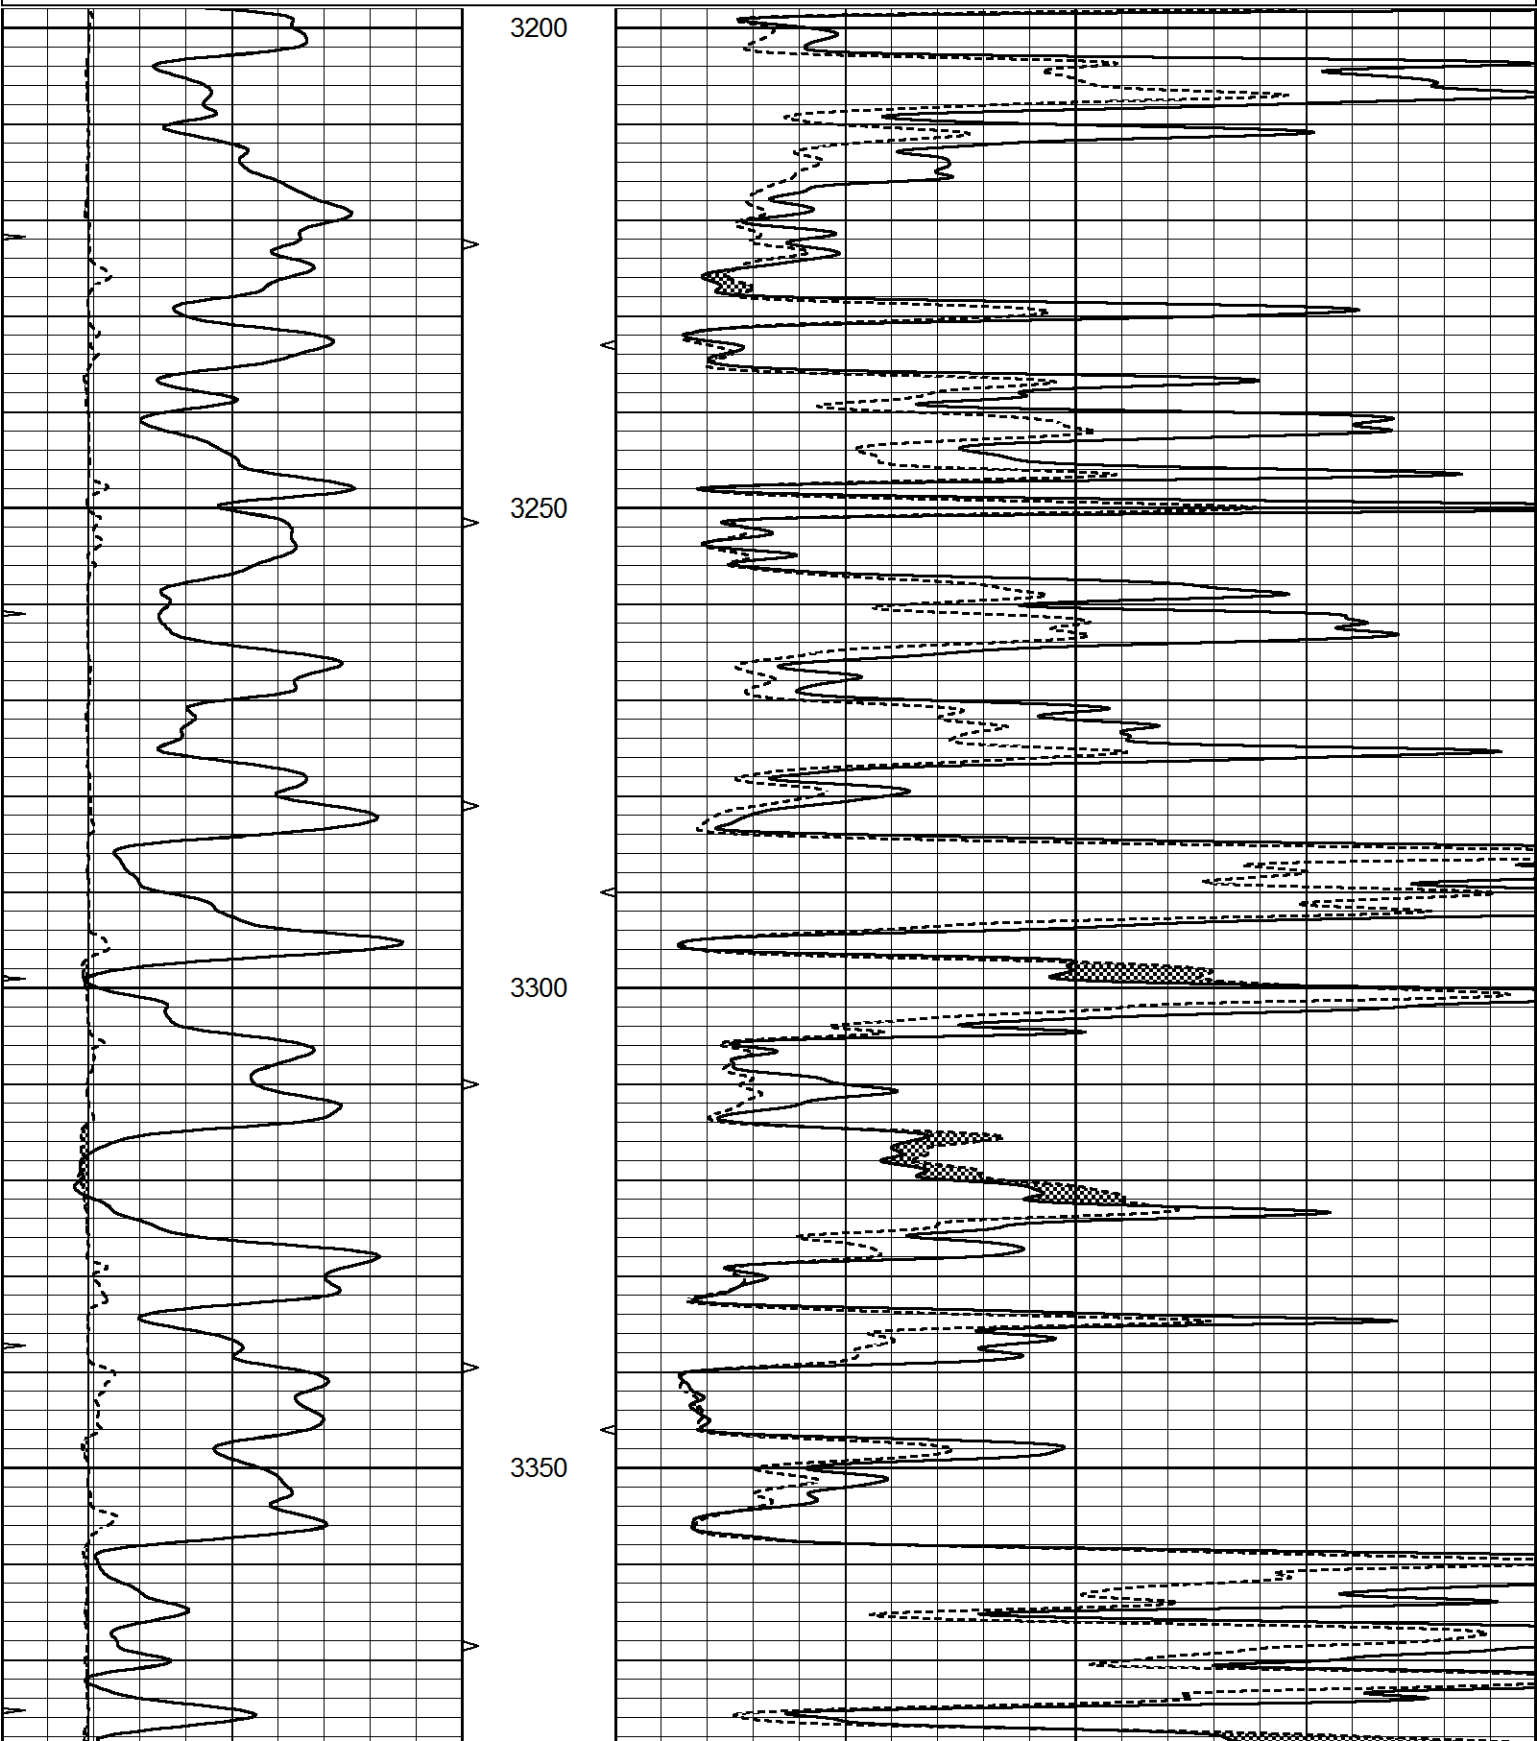

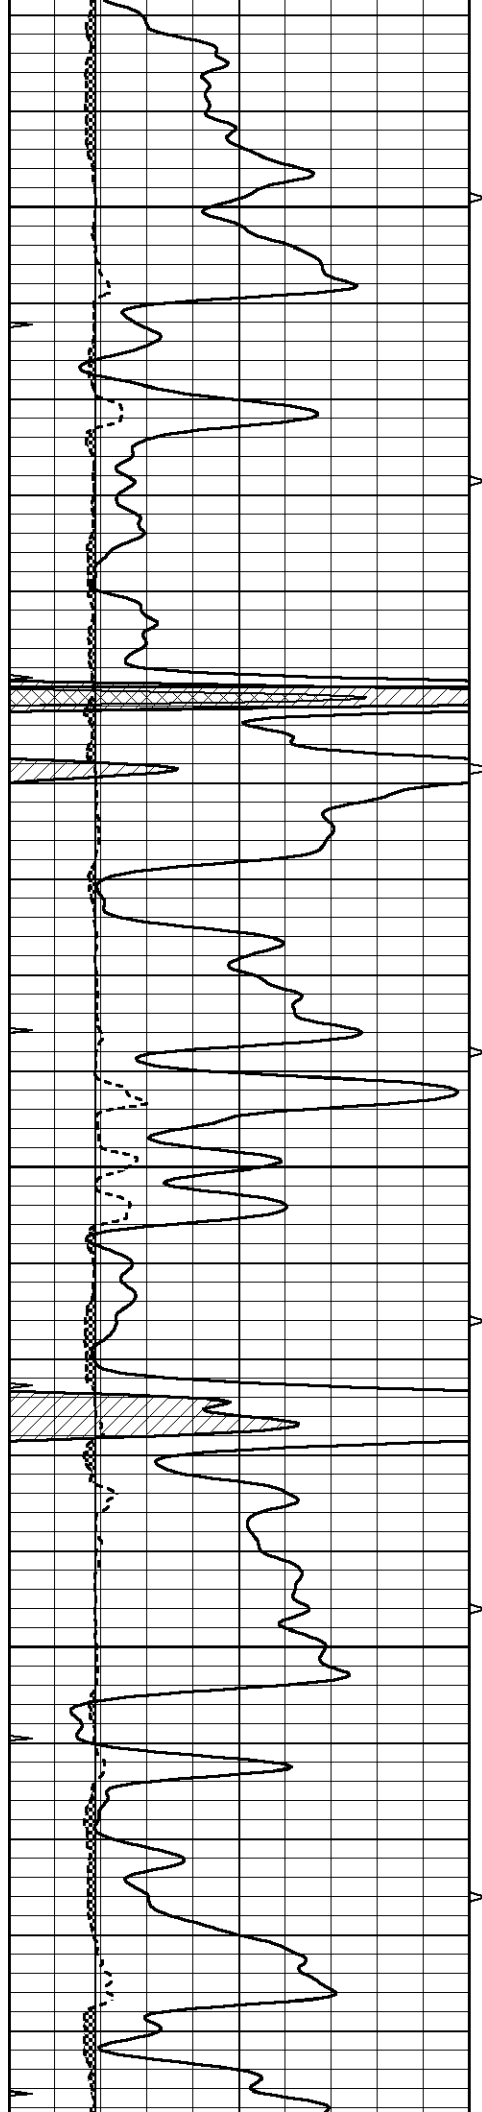



3400

3450

3500

3550

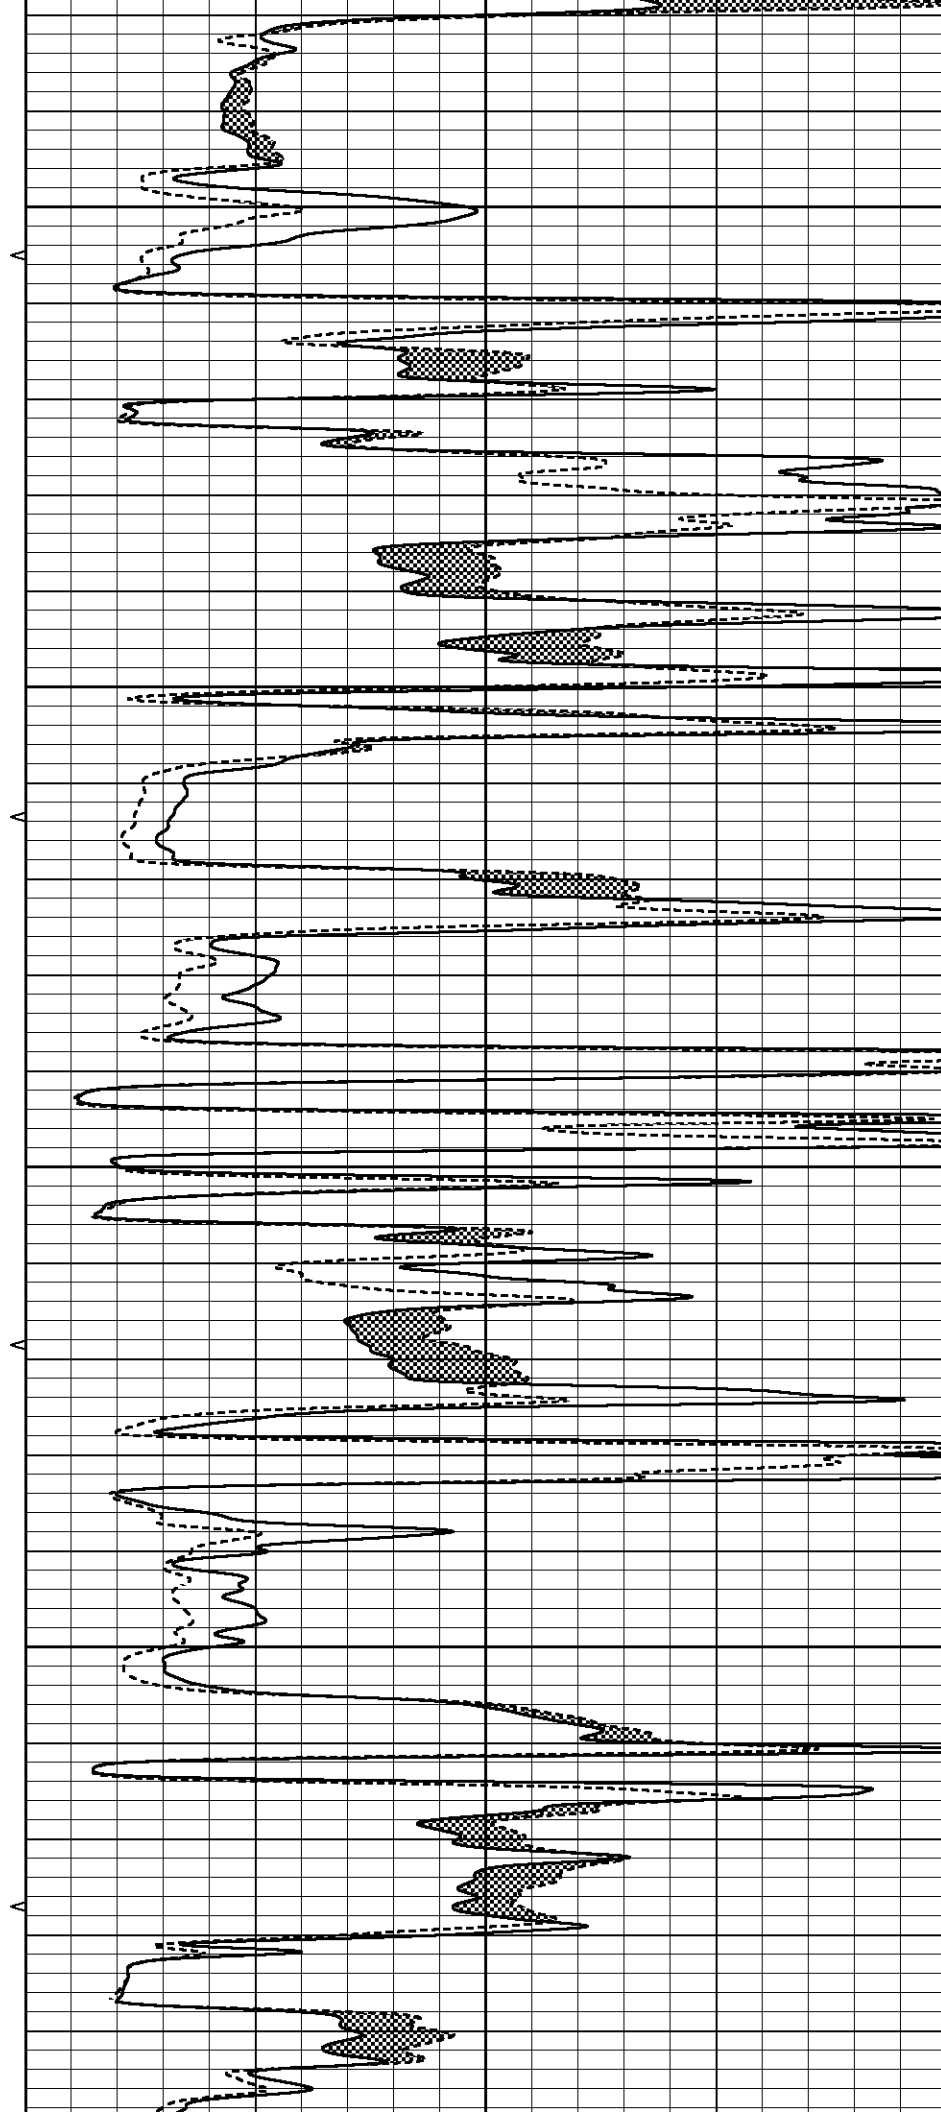


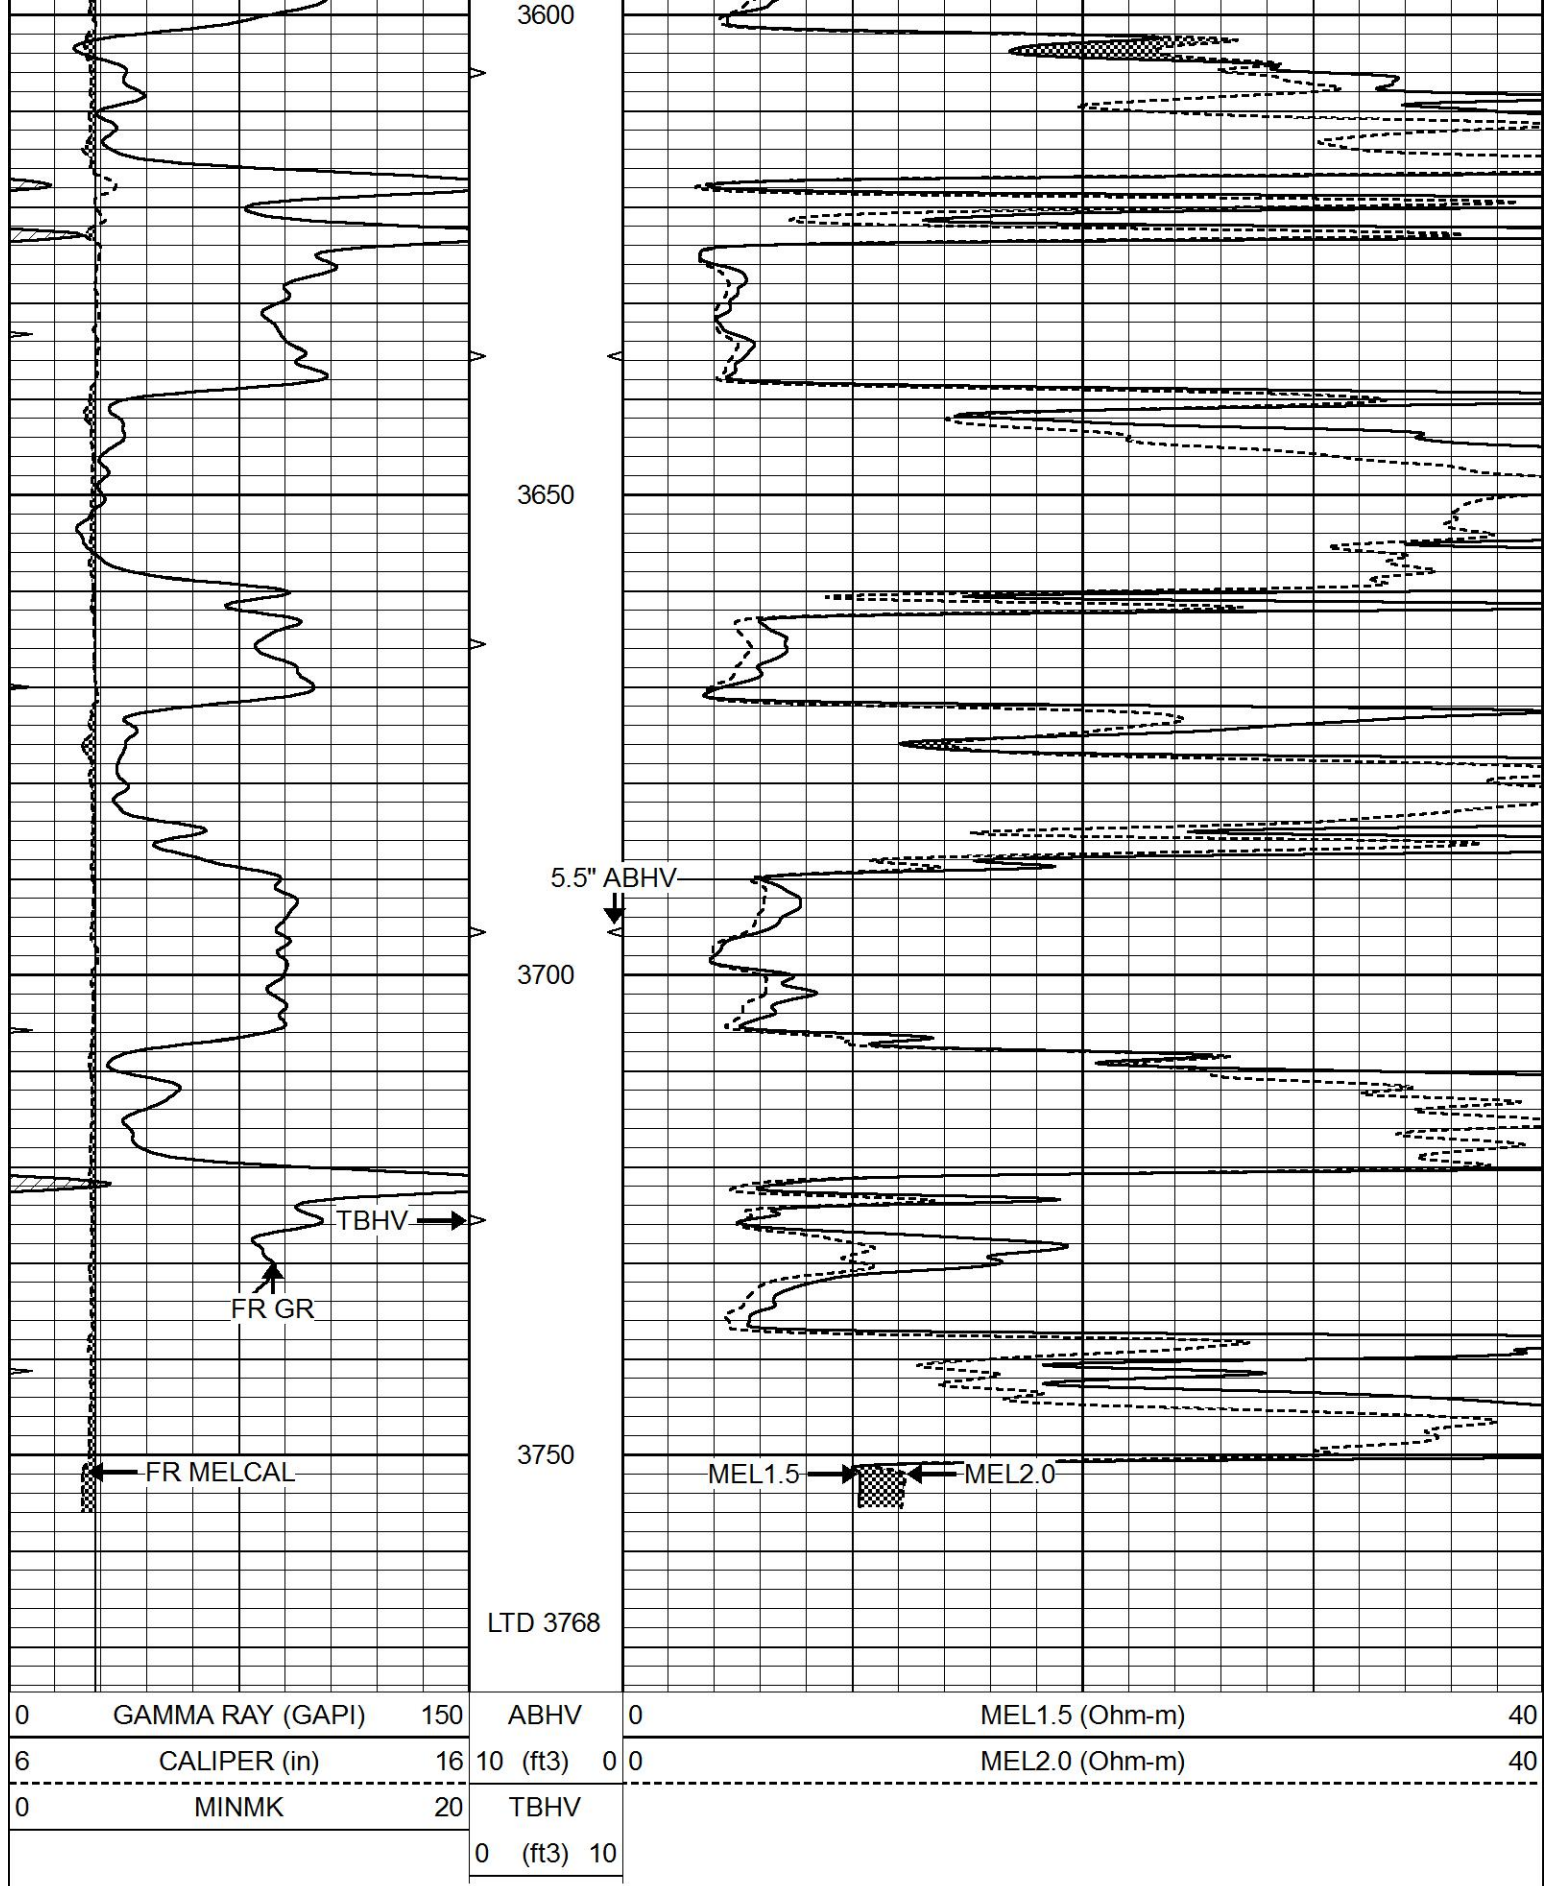


REPEAT SECTION

Database File	6803pe.db
Dataset Pathname	pass5.2
Presentation Format	_micro
Dataset Creation	Wed Nov 23 01:43:09 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

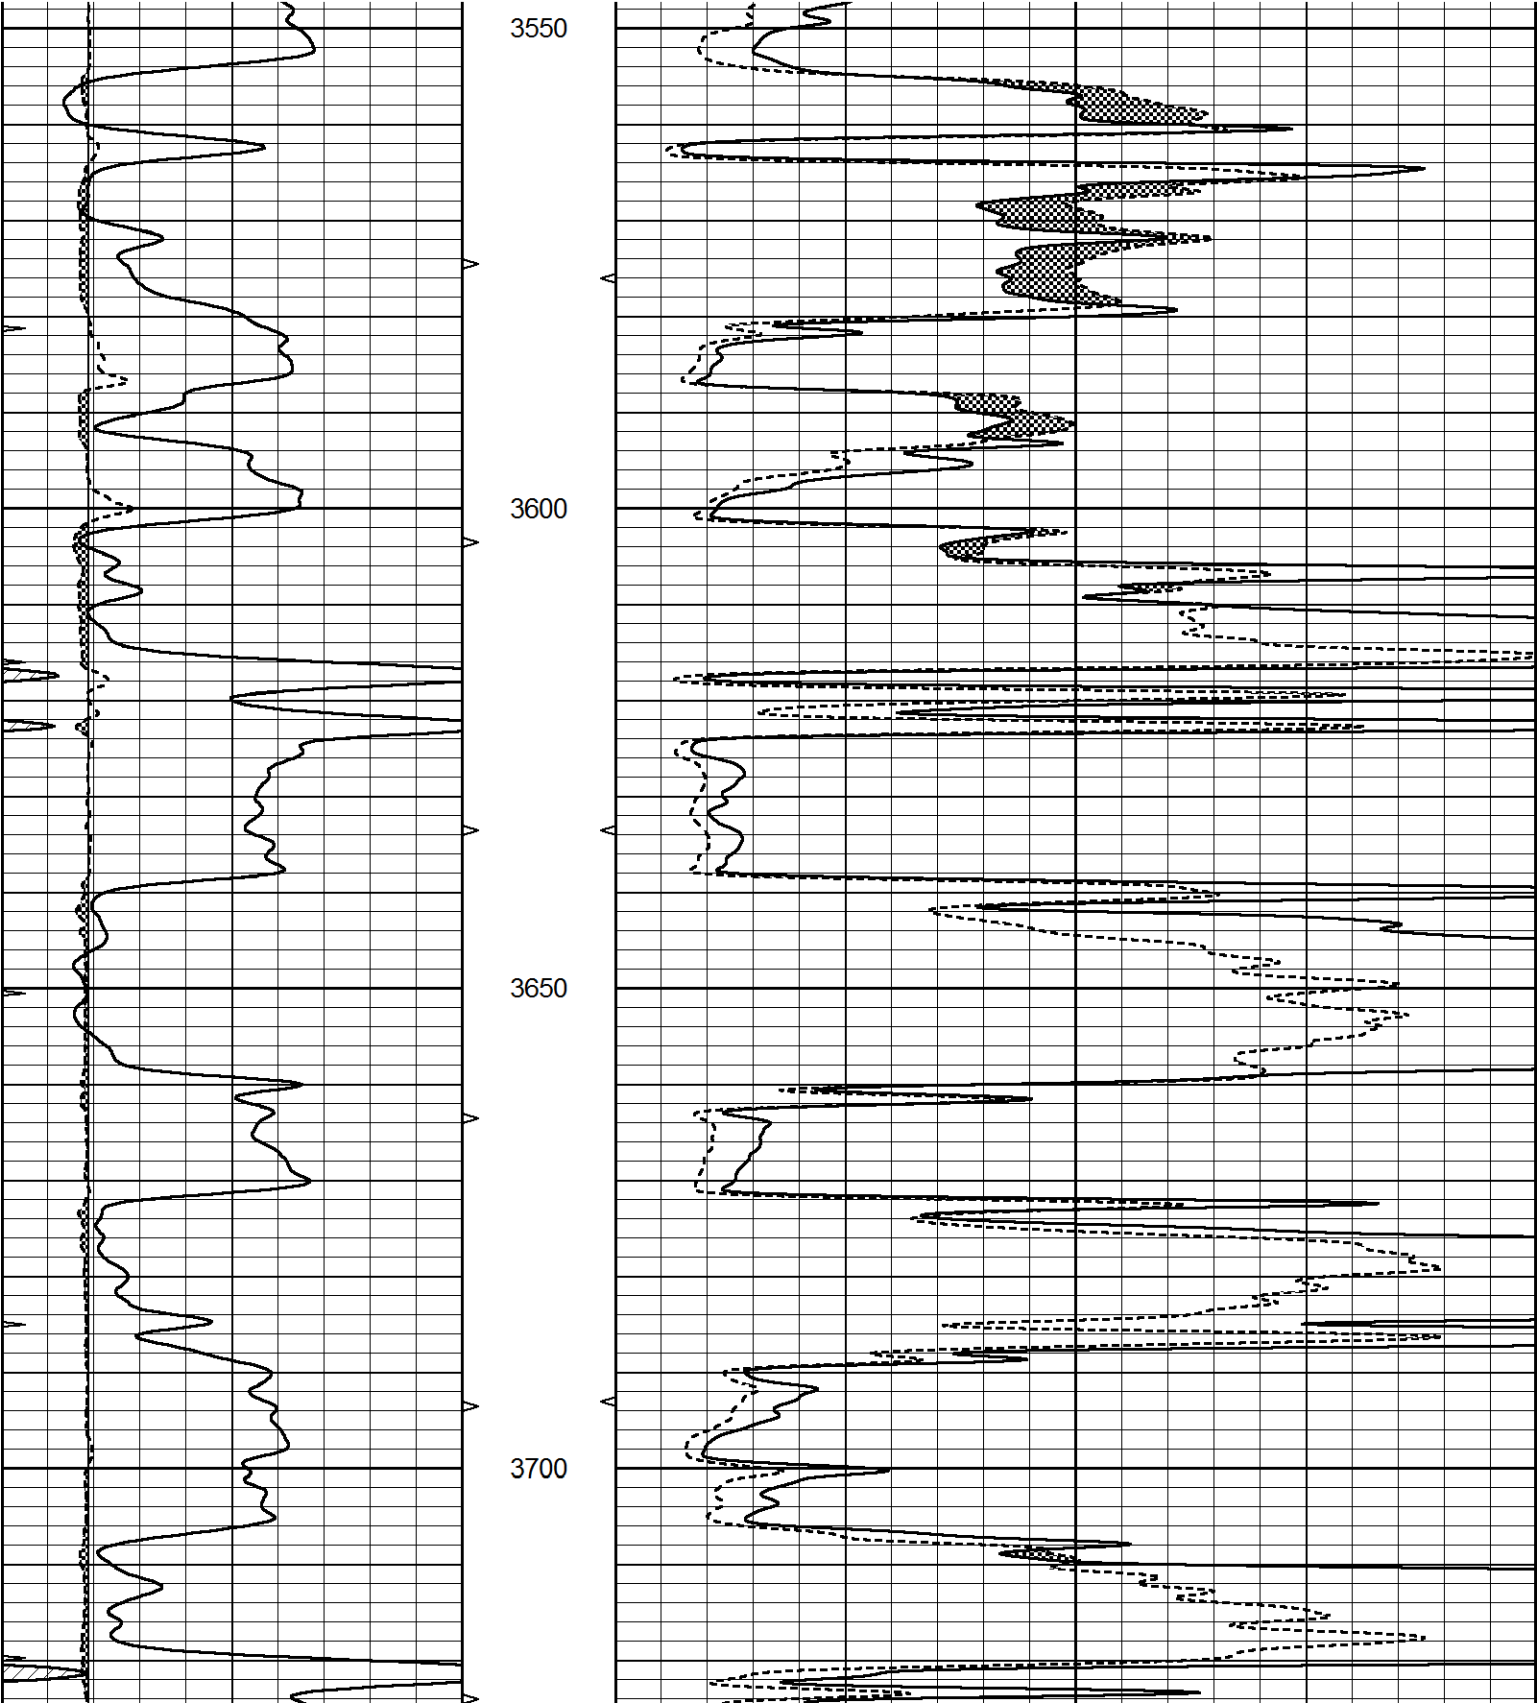

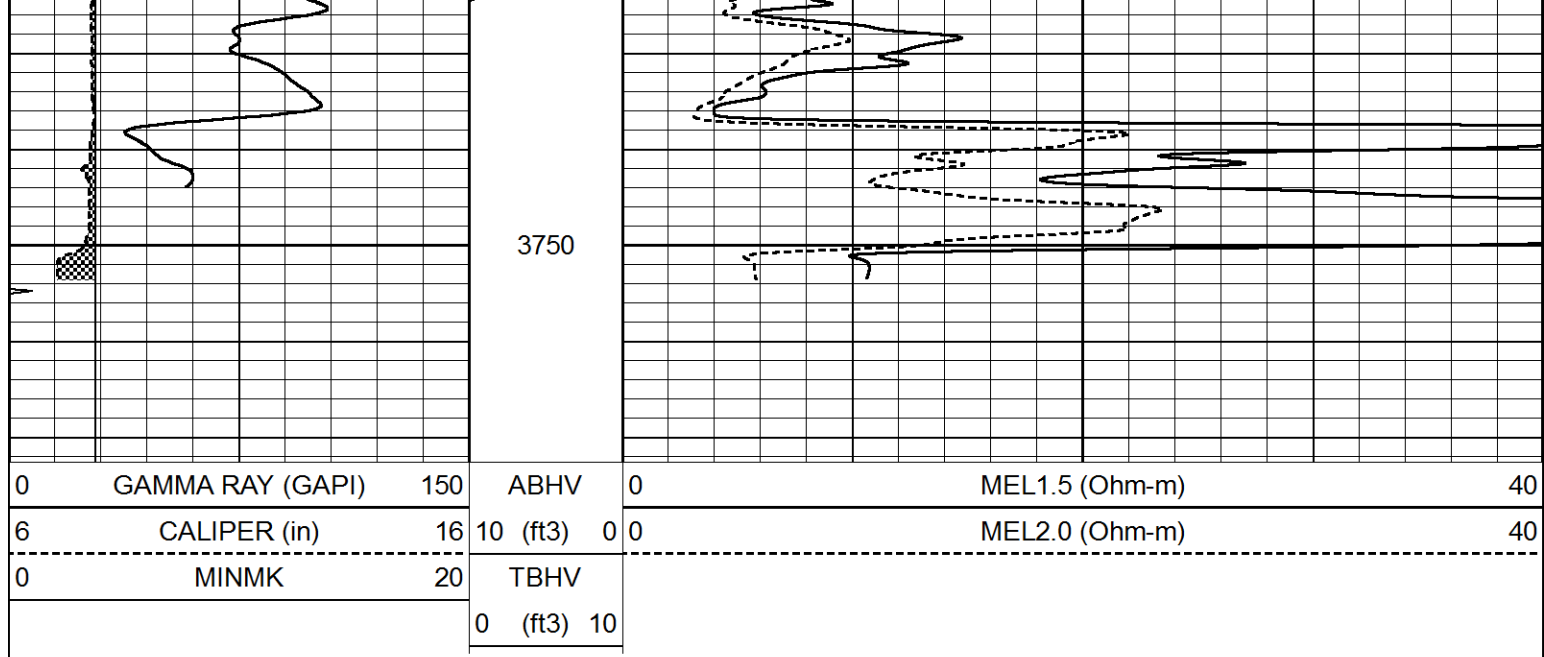

Calibration Report			
Database File	6803pe.db		
Dataset Pathname	pass6.5		
Dataset Creation	Wed Nov 23 02:06:36 2022		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Sun Nov 20 18:49:03 2022		
Caliper Calibration:	Gain=-2.763	Offset=18.639	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	3.850	0.955	
1.5" Calibration:	Gain=40.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	0.624	
2" Calibration:	Gain=60.000	Offset=-0.500	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.006	0.468	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Sun Nov 20 18:49:12 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5800	GAPI/cps	