



MICRO LOG

Company	TREK - AEC, LLC.	Location:	API # : 15-151-22560-0000	Other Services CDL/CNL/PE DIL/SONIC
Well	DICK TRUST #1-35	Permanent Datum	1363' FSL & 2347' FWL SE - SE - NE - SW SEC 35 TWP 29S RGE 12W	Elevation K.B. 1850 D.F. 1848 G.L. 1837
Field	UNNAMED	Log Measured From	KELLY BUSHING	
County	PRATT	Drilling Measured From	KELLY BUSHING	
State	KANSAS			
Date	1/25/23			
Run Number	TWO			
Depth Driller	5000			
Depth Logger	5002			
Bottom Logged Interval	4986			
Top Log Interval	2600			
Casing Driller	8 5/8"@441'			
Casing Logger	440			
Bit Size	7 7/8"			
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 9,500 PPM		
Density / Viscosity	9.1/45			
pH / Fluid Loss	10.5/12.0			
Source of Sample	FLOWLINE			
Rm @ Meas. Temp	.520@75F			
Rmf @ Meas. Temp	.390@75F			
Rmc @ Meas. Temp	.624@75F			
Source of Rmf / Rmc	MEASURED			
Rm @ BHT	.312@125F			
Time Circulation Stopped	5 HOURS			
Time Logger on Bottom	7:15 A.M.			
Maximum Recorded Temperature	125F			
Equipment Number	8916			
Location	HAYS, KANSAS			
Recorded By	JEFF LUEBBERS			
Witnessed By	DAVE BARKER			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
SAWYER, KS., 4E. ON HWY 42 TO "RD. 70", 2 1/2S., E. INTO




MAIN SECTION

Database File	7446pe.db
Dataset Pathname	pass6.4
Presentation Format	_micro
Dataset Creation	Wed Jan 25 09:32:23 2023
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

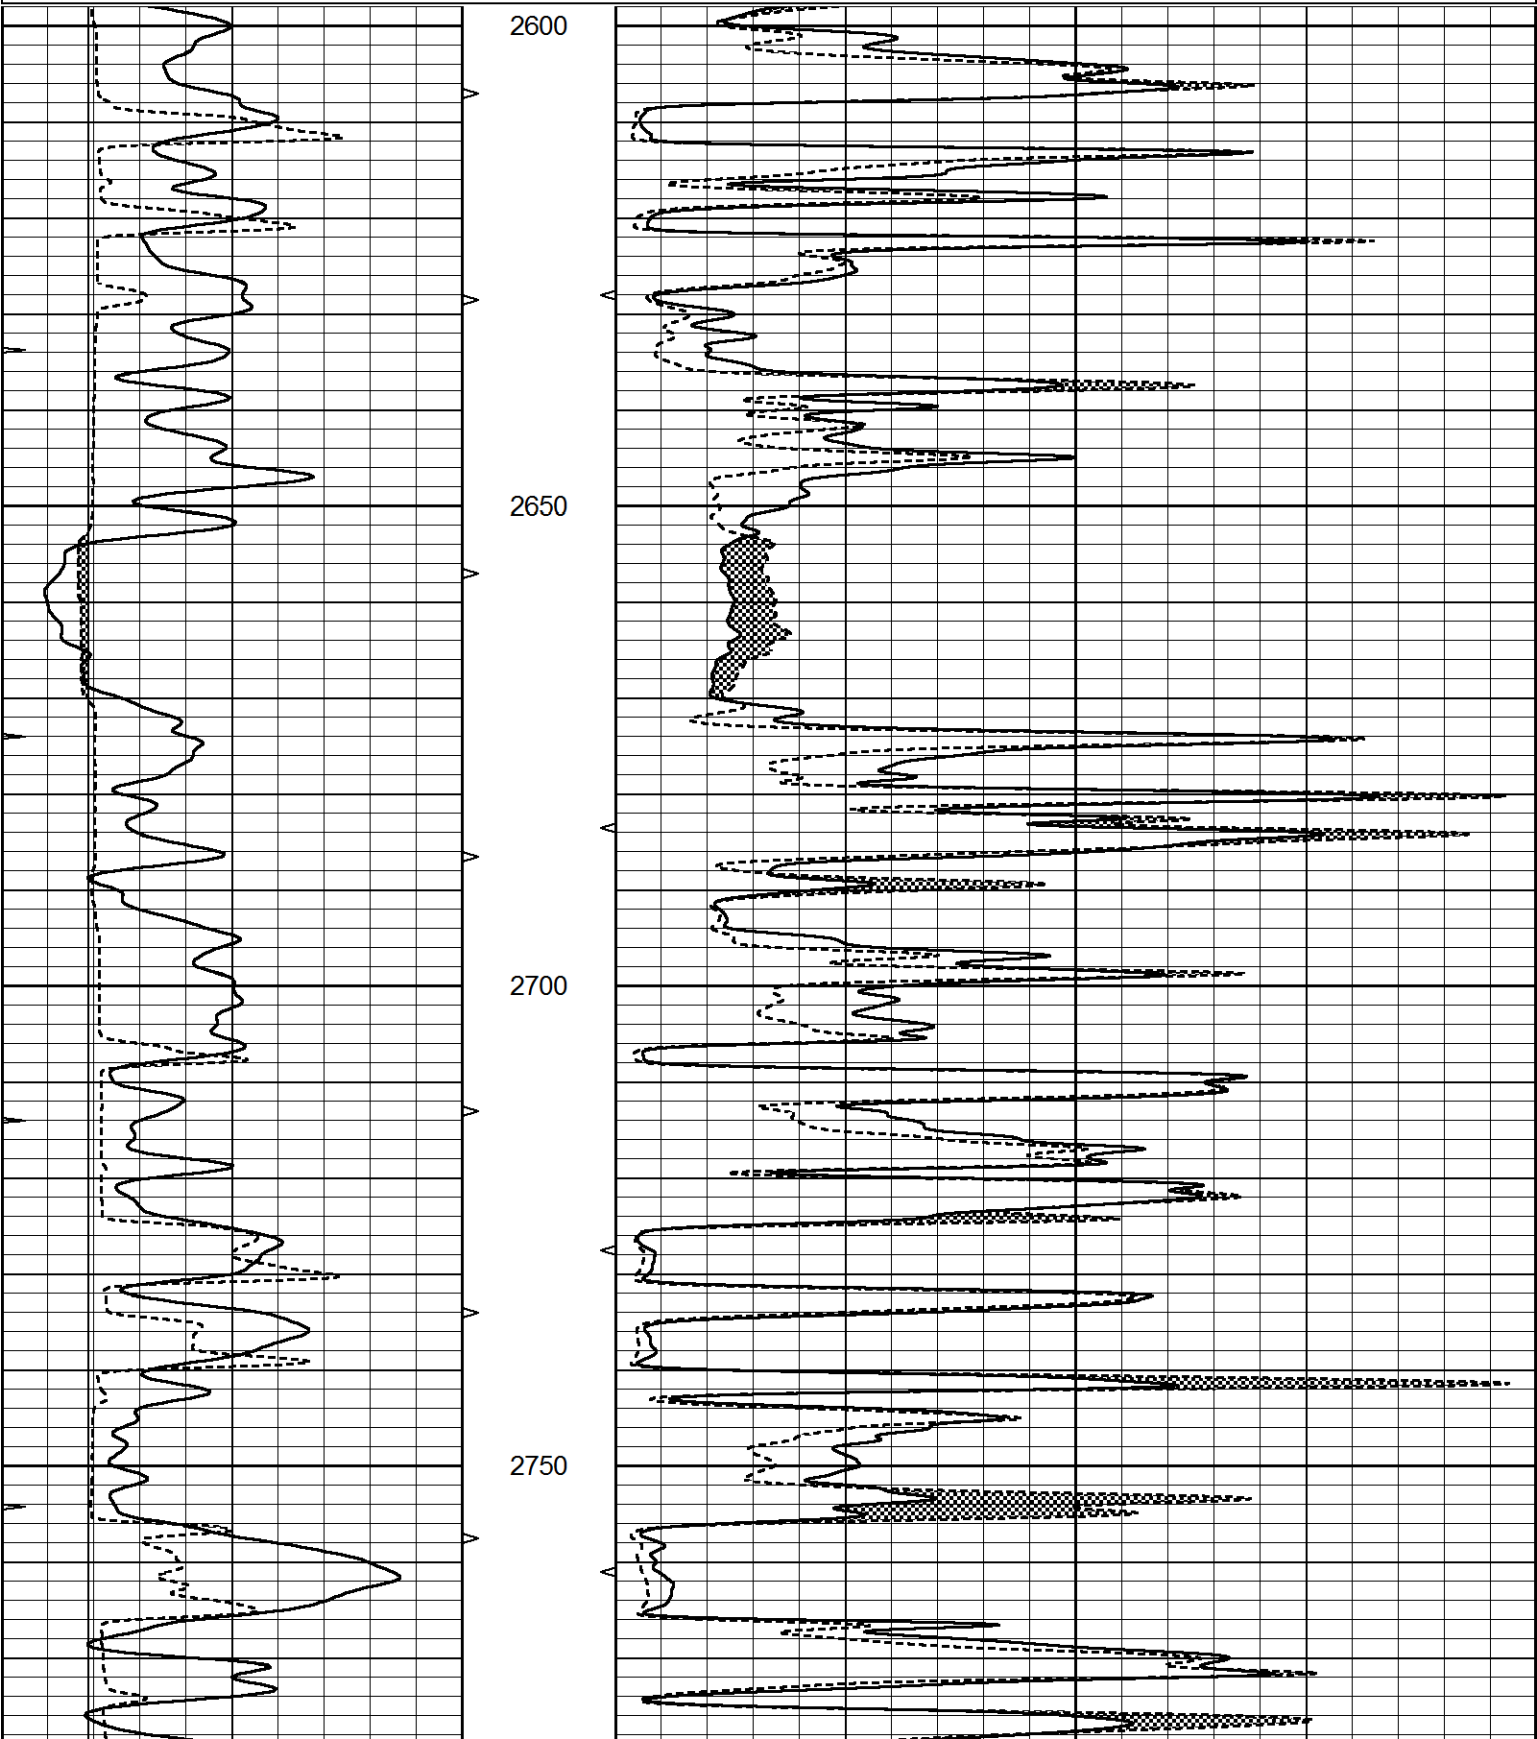

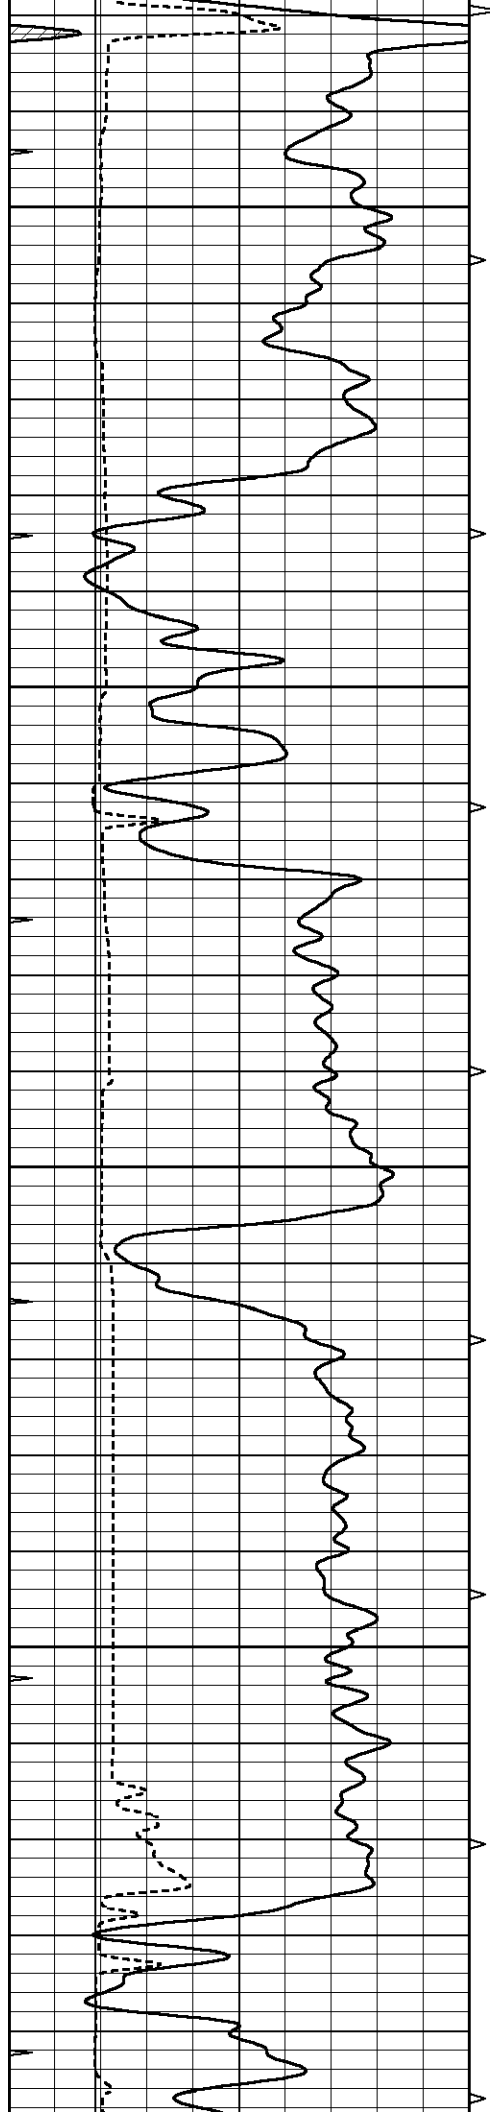



2800

2850

2900

2950

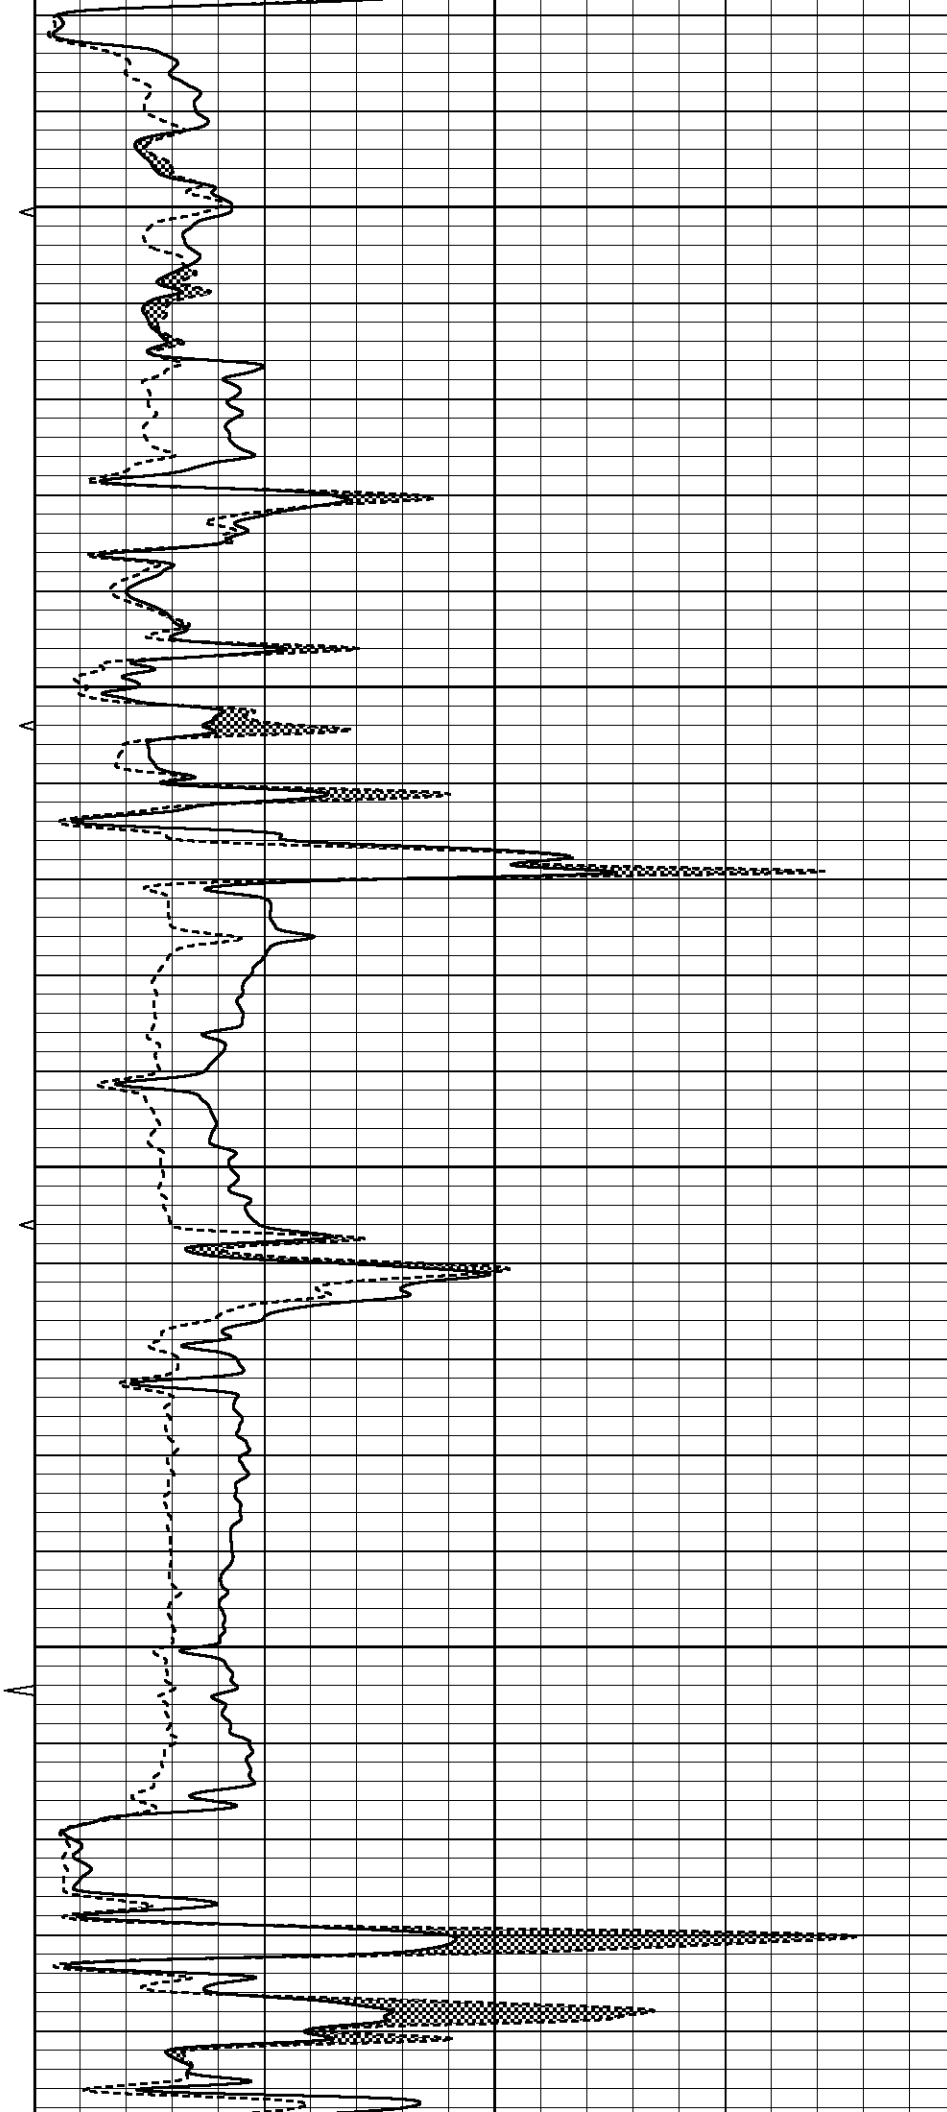

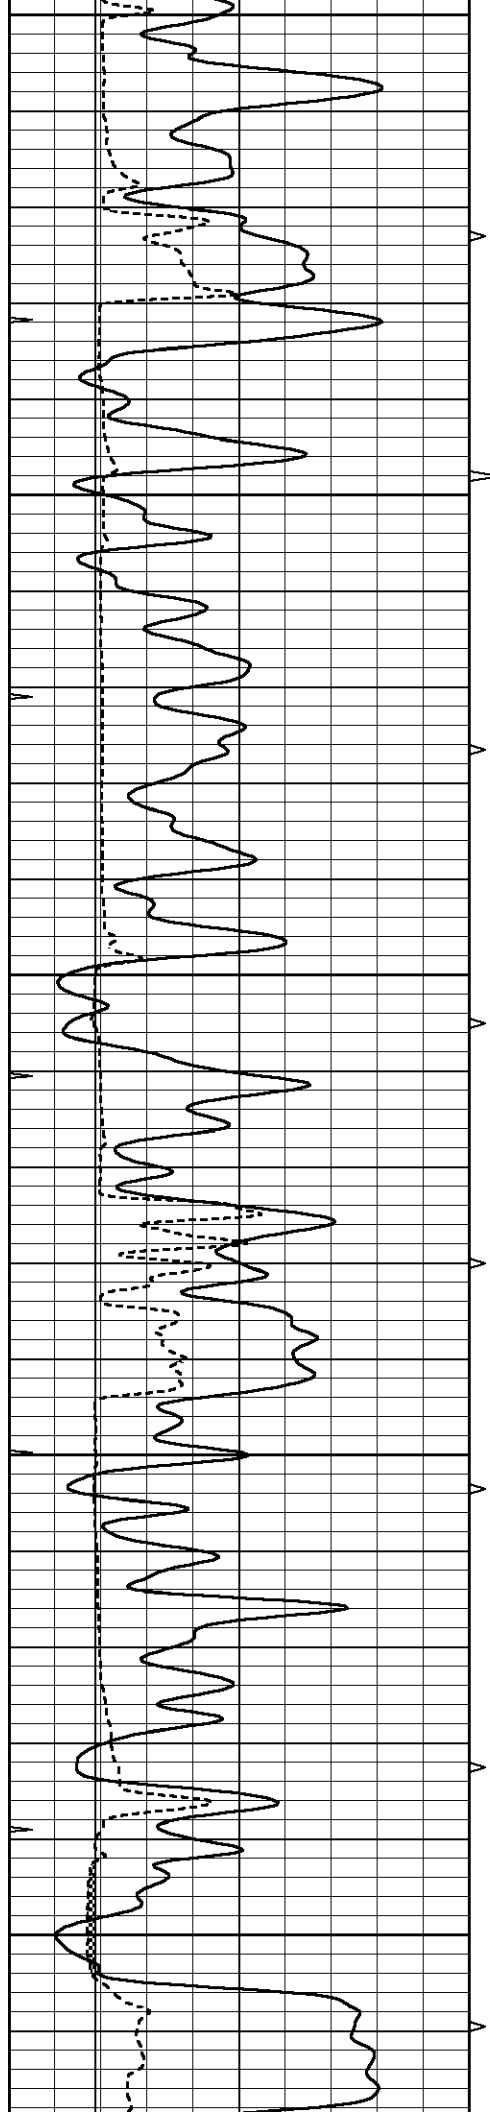


3000



3050


3100

3150

3200

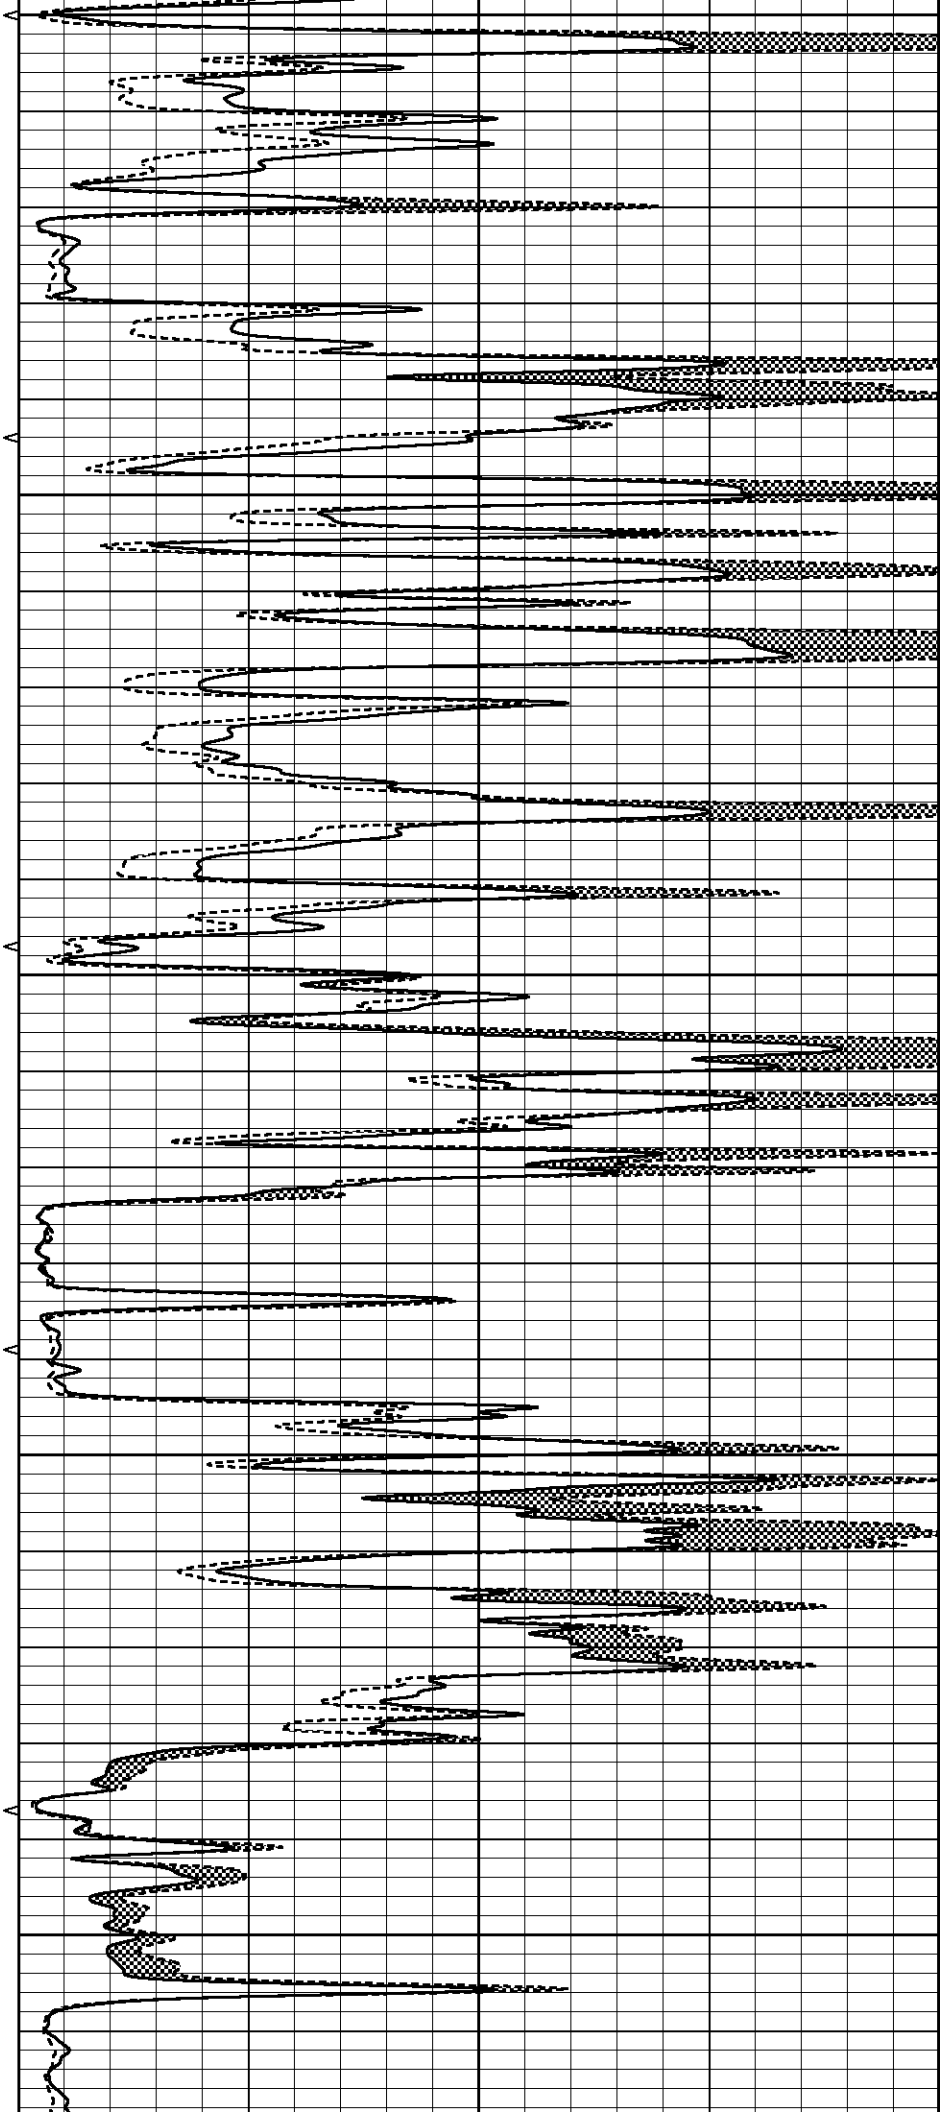

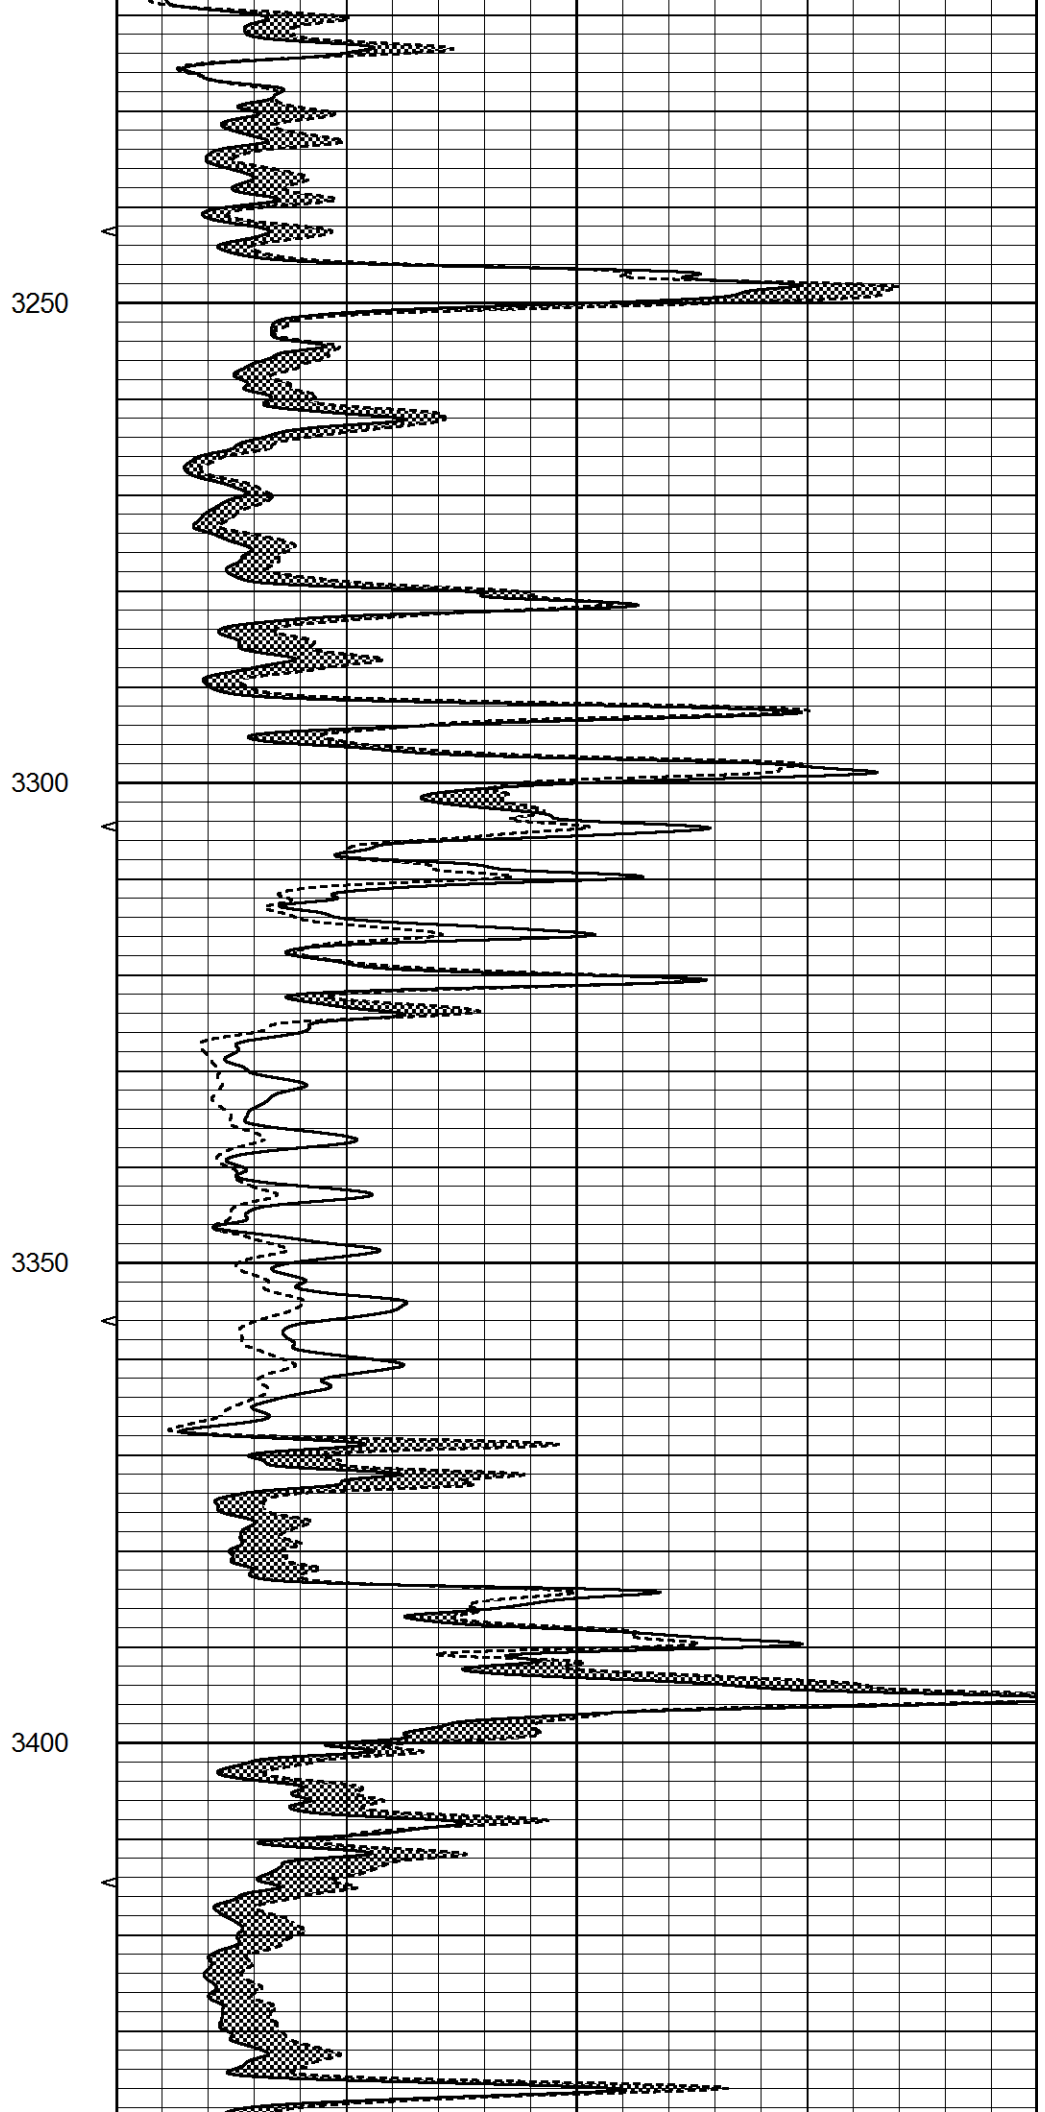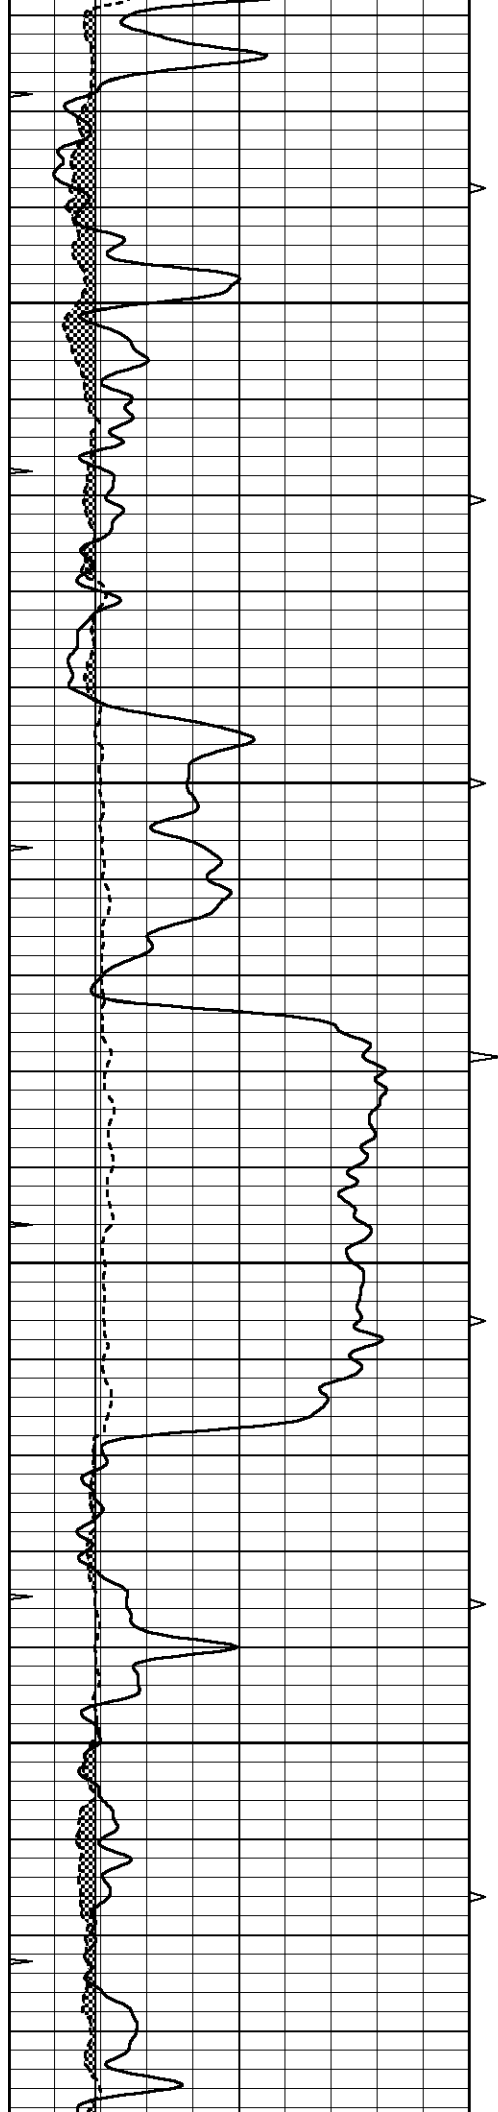

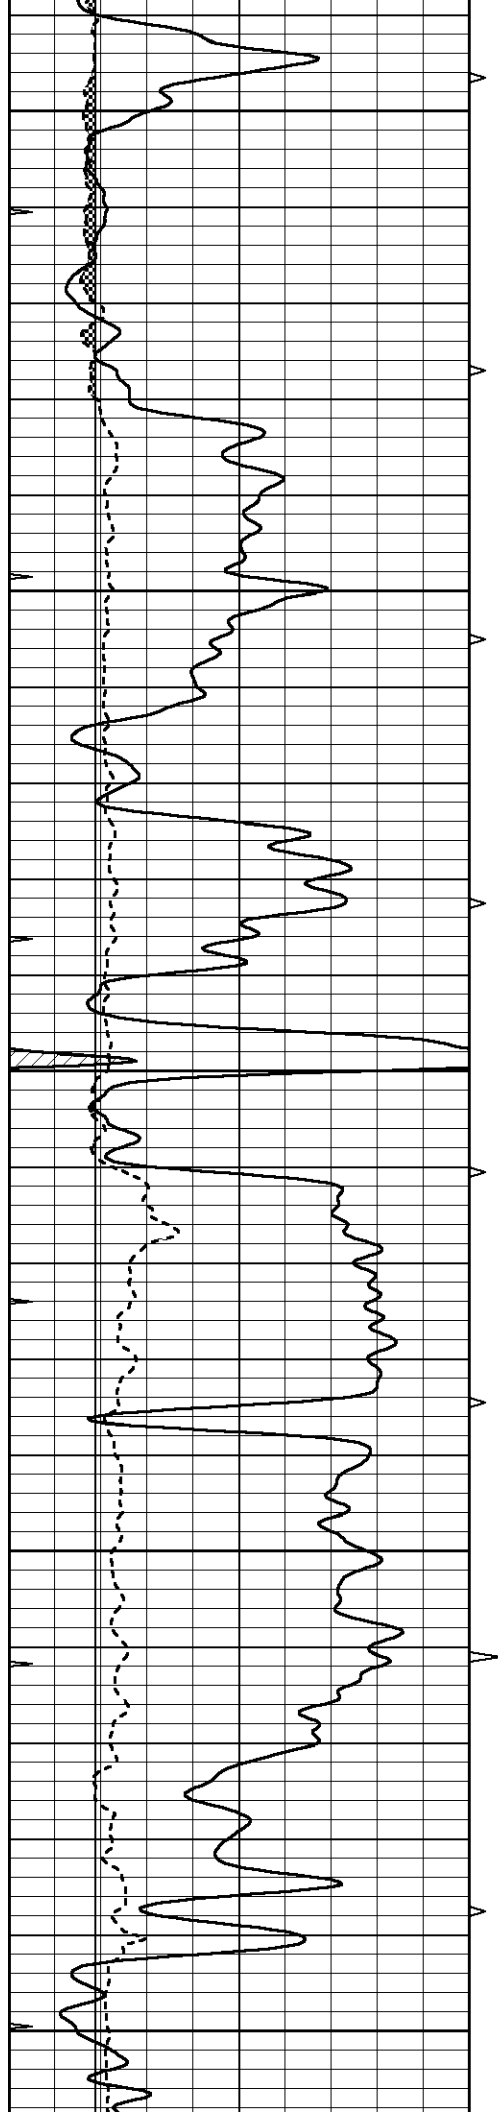


3450


3500

3550

3600

3650

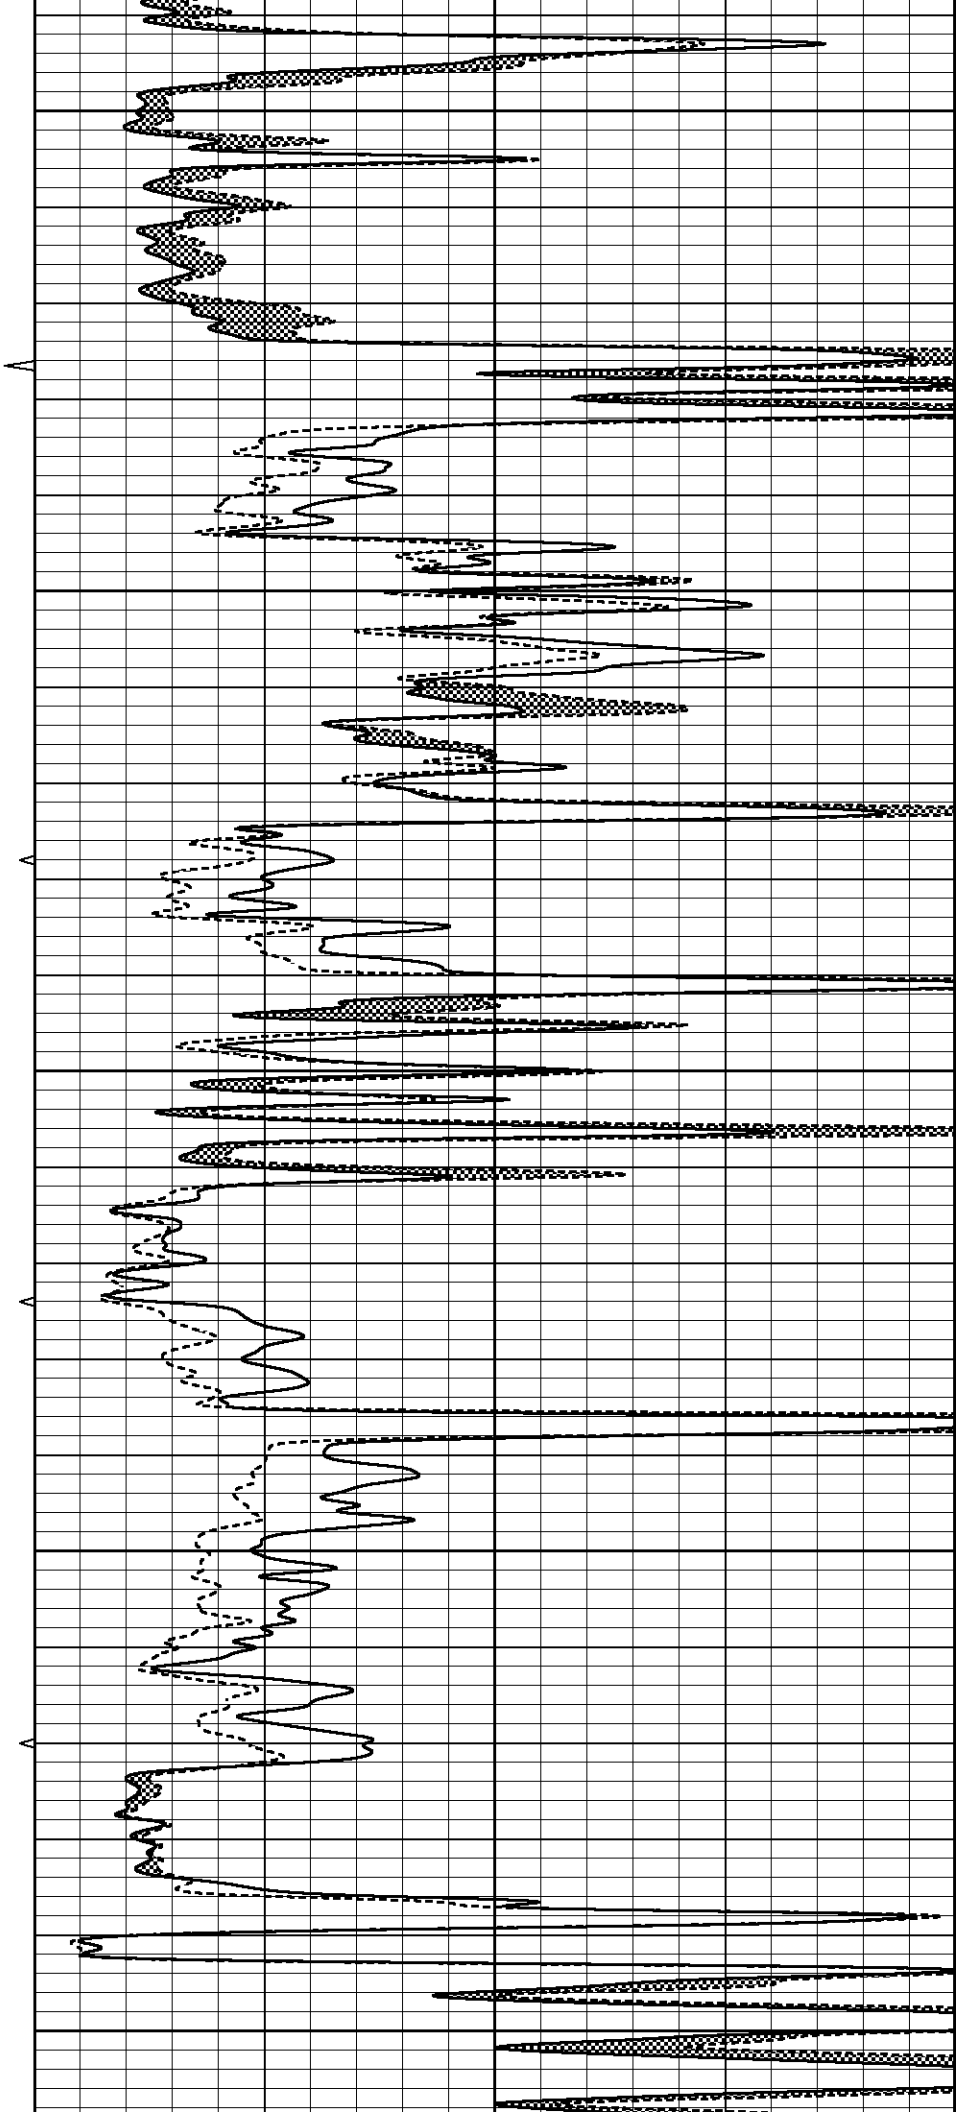

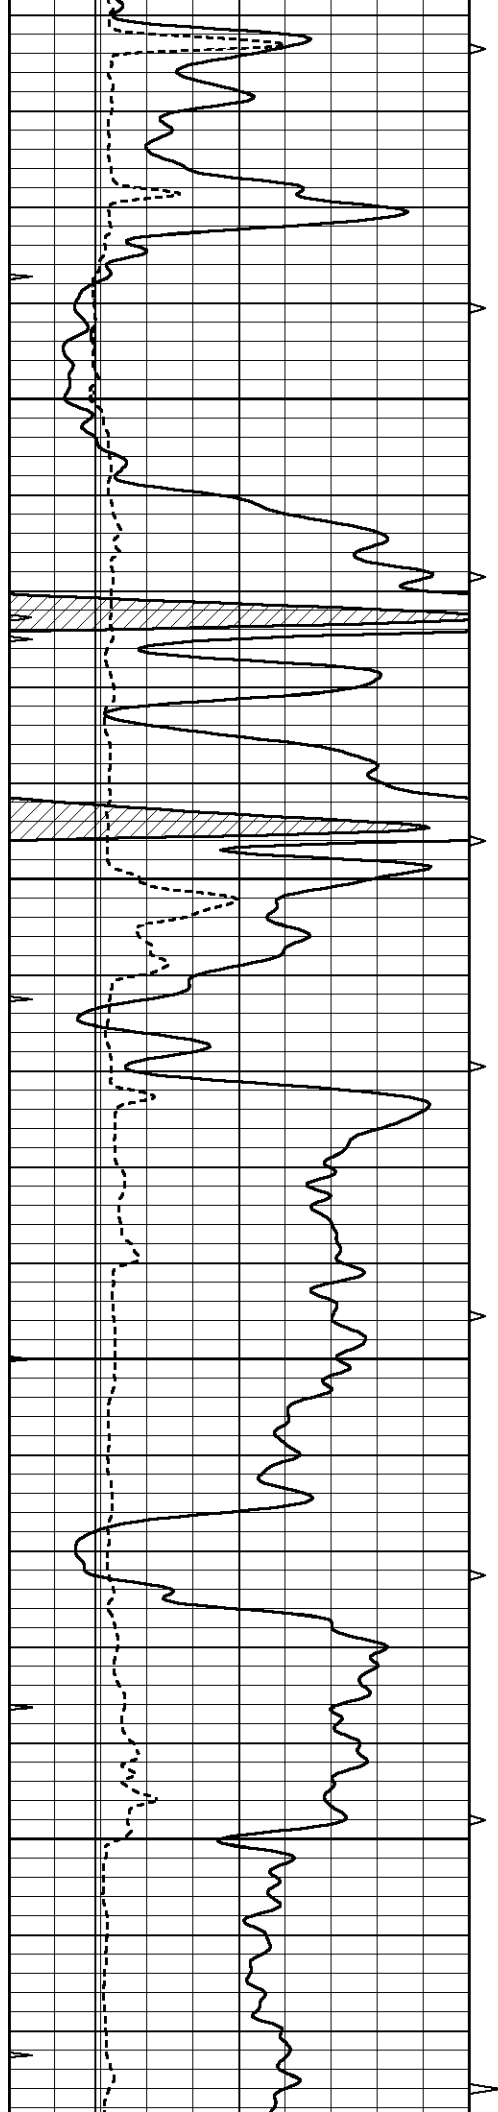



3700

3750

3800

3850

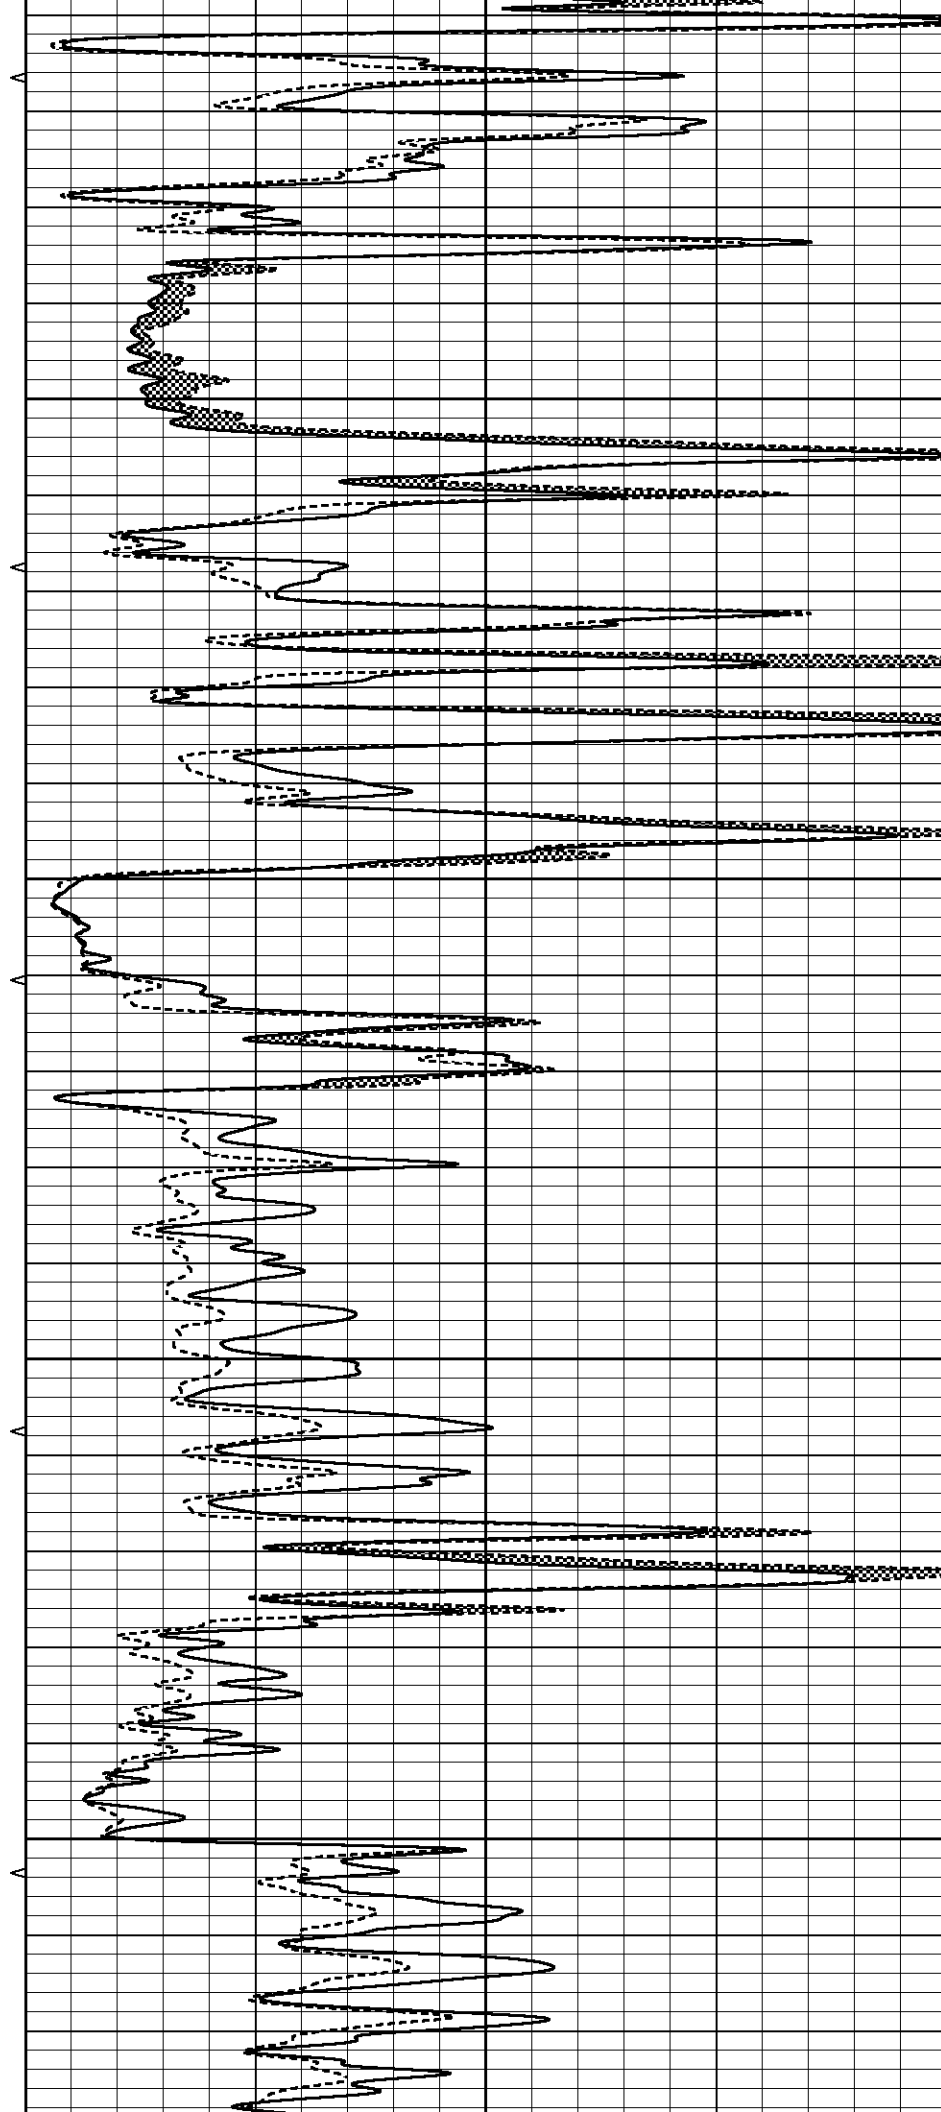

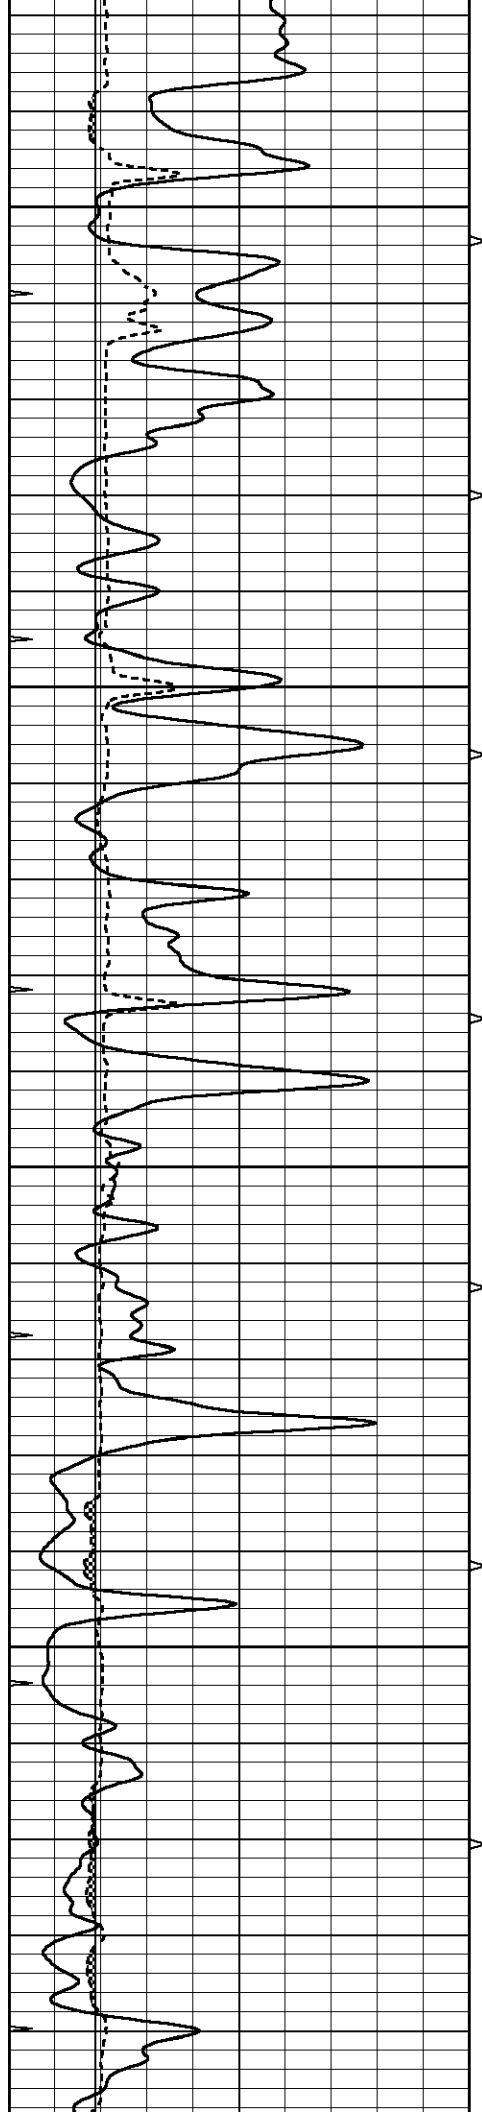




3900


3950


4000

4050

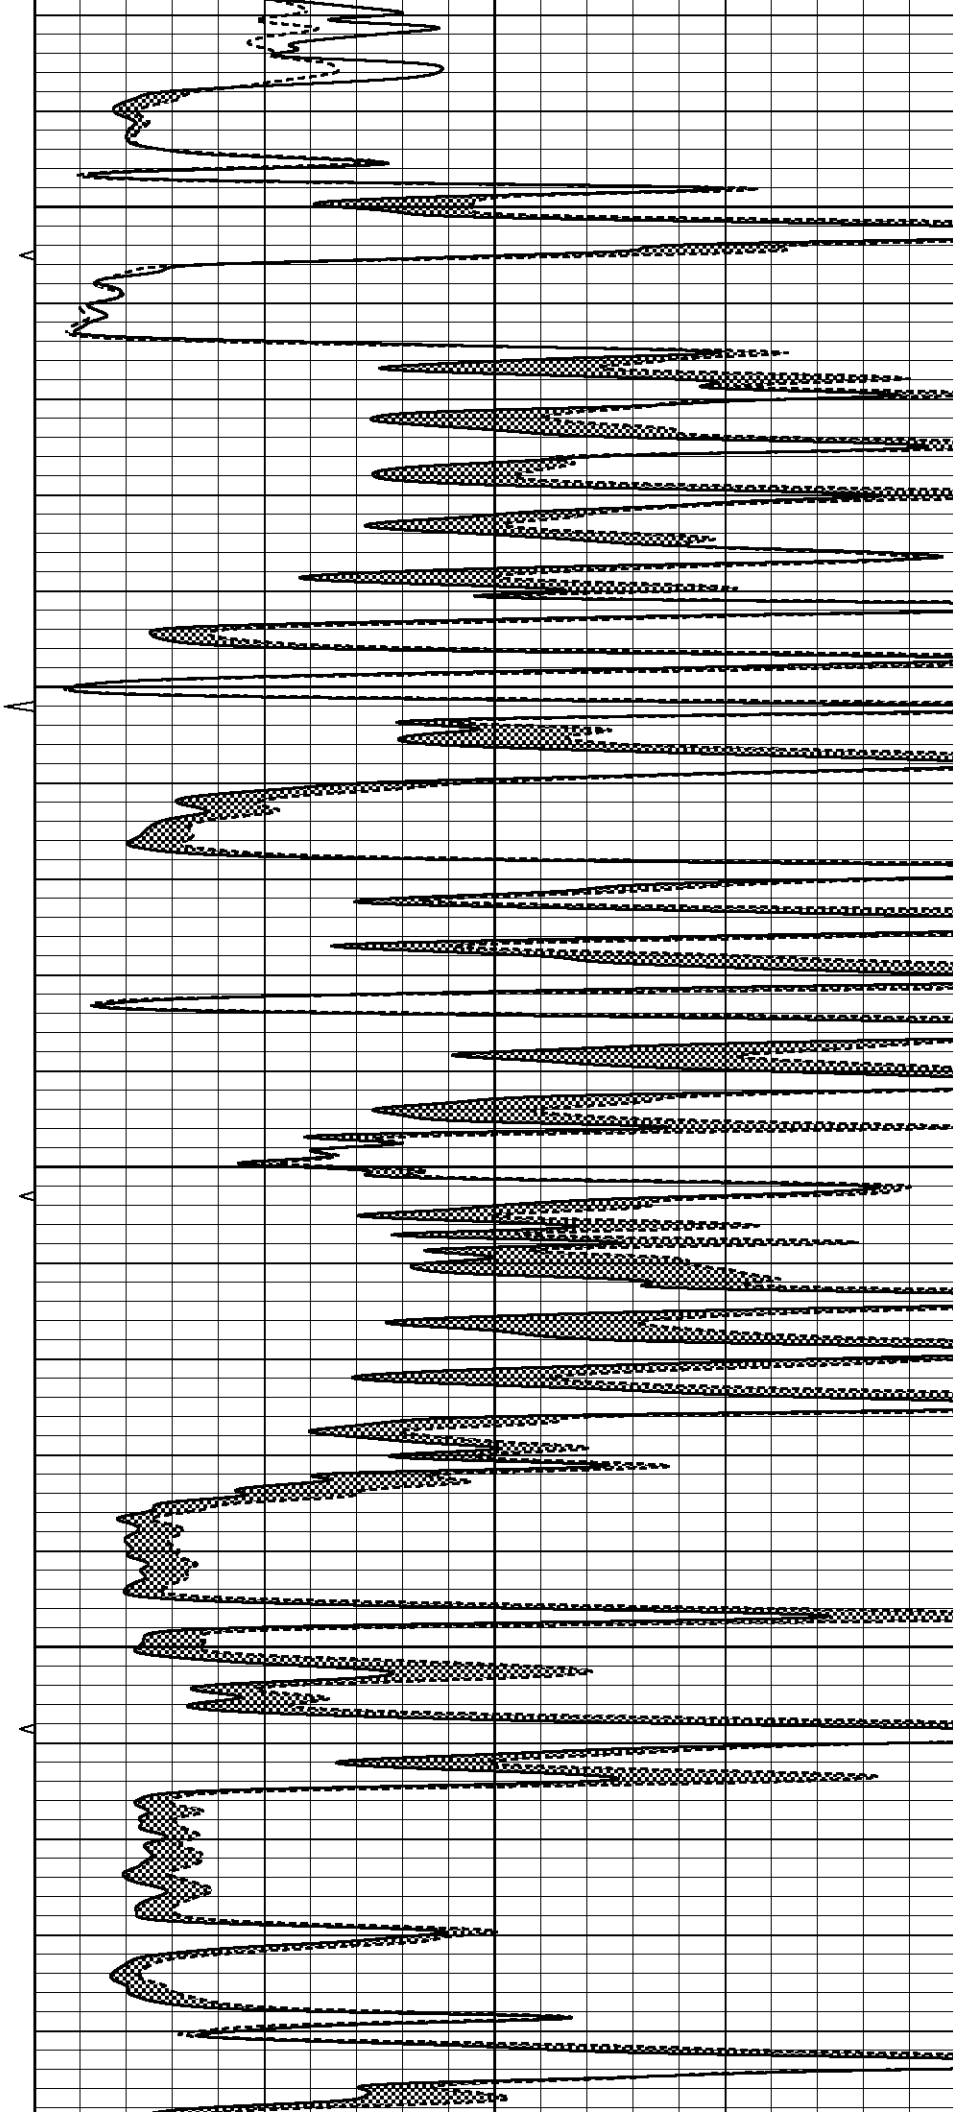

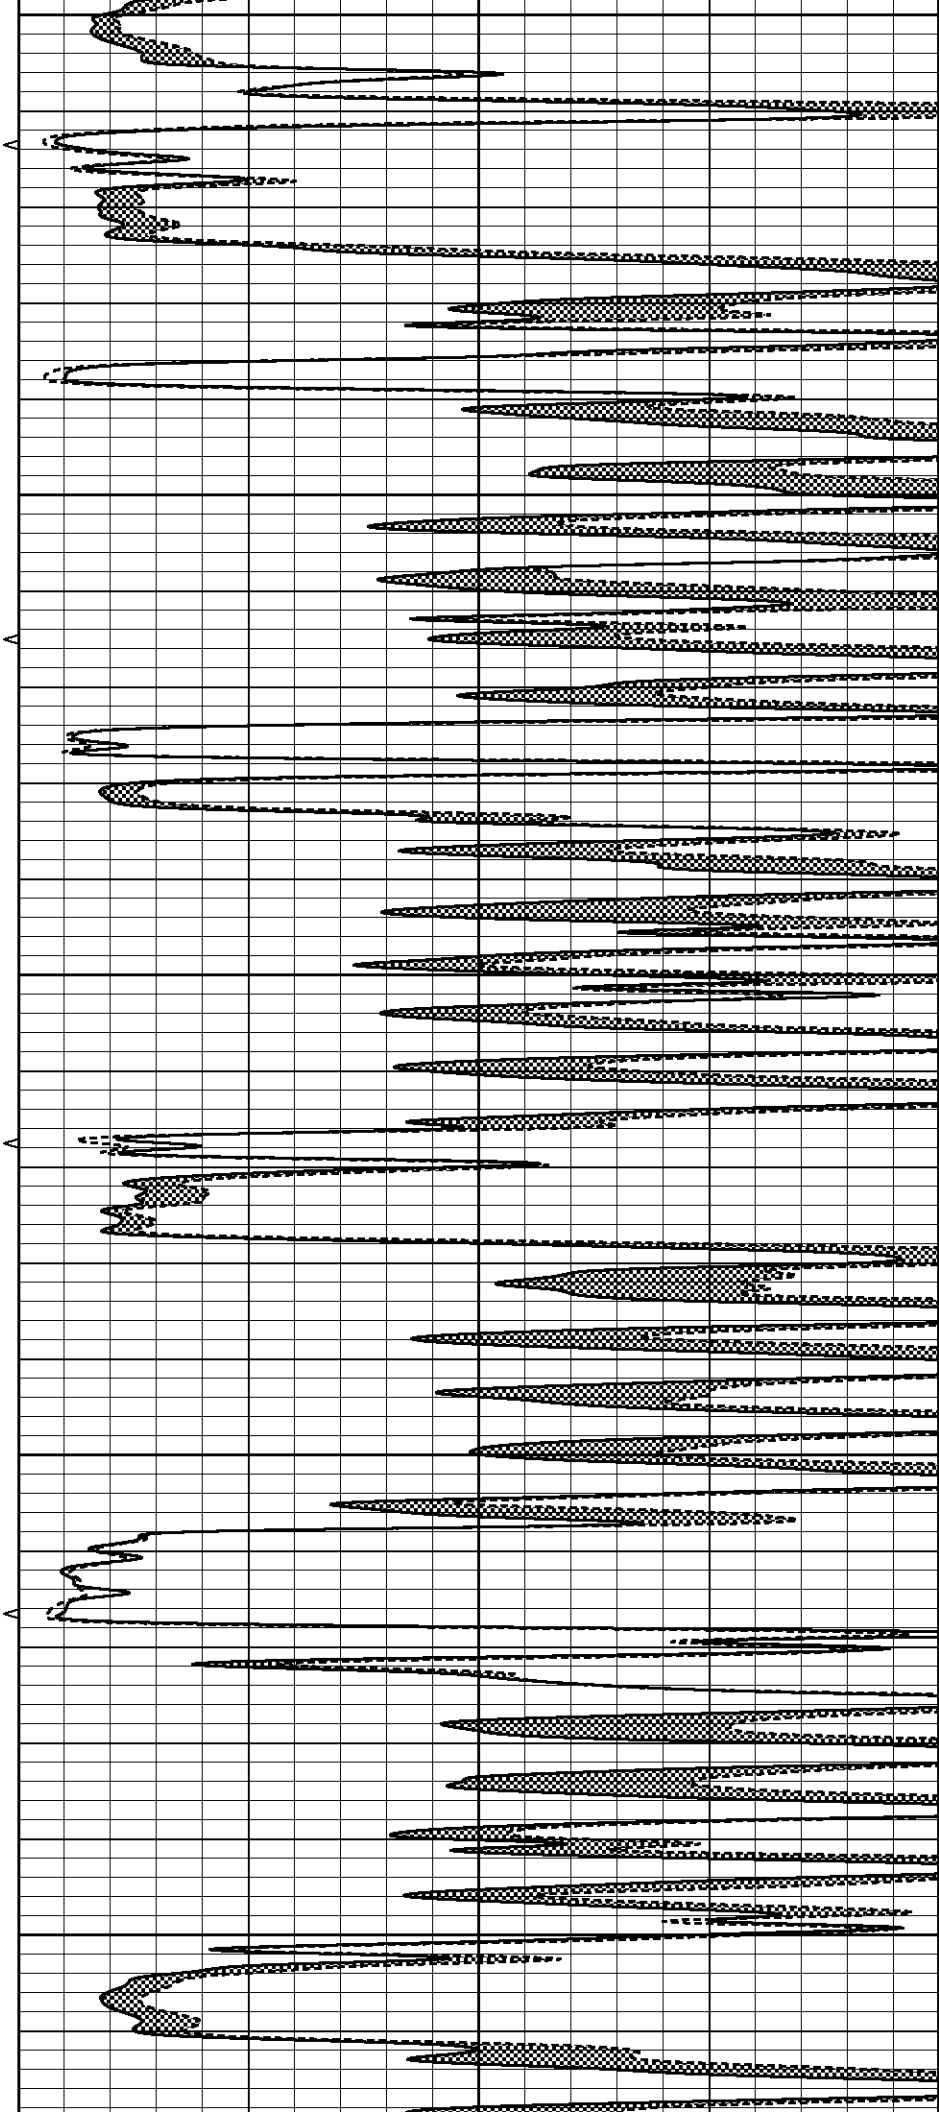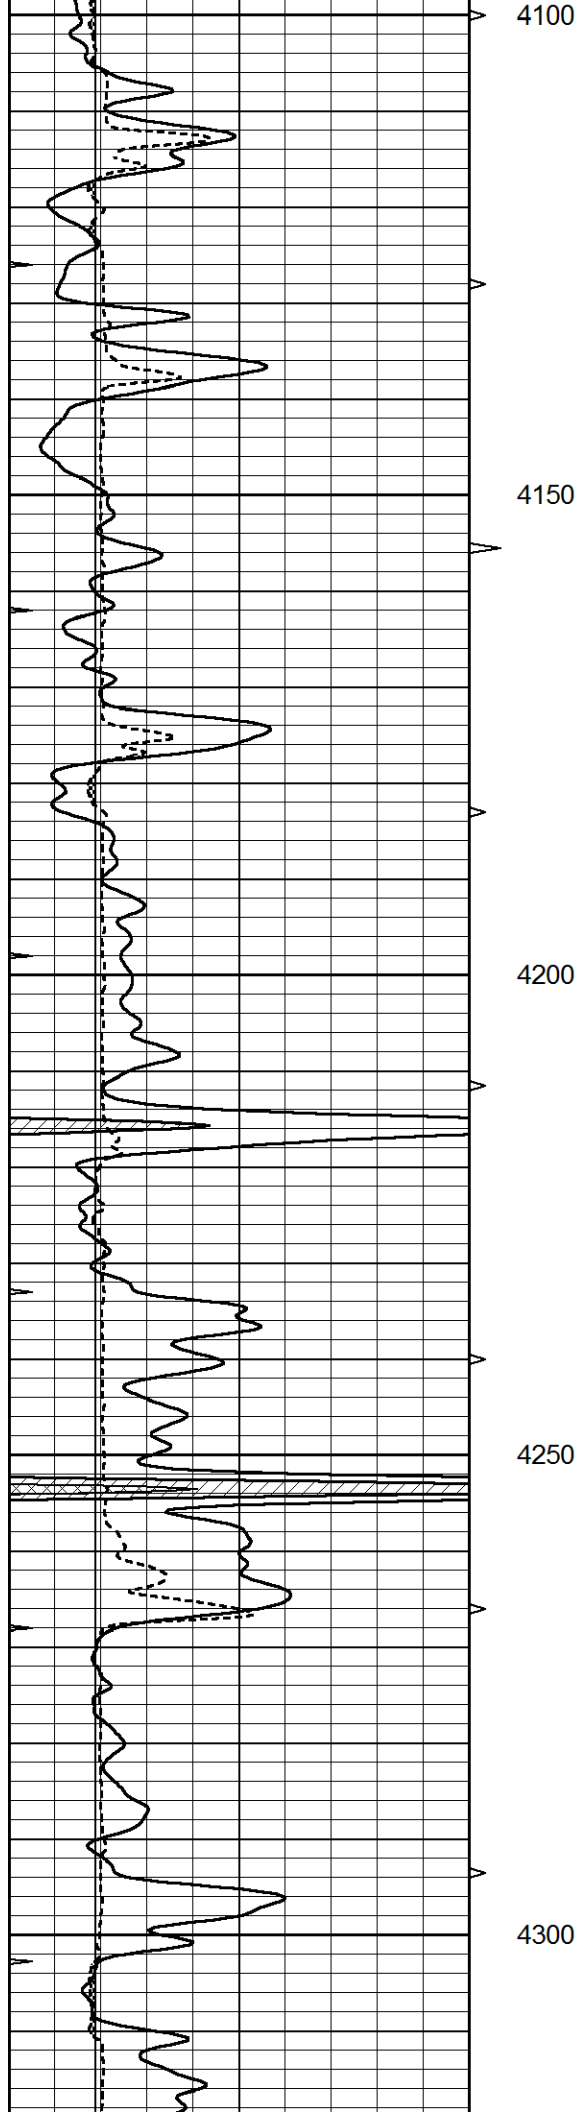

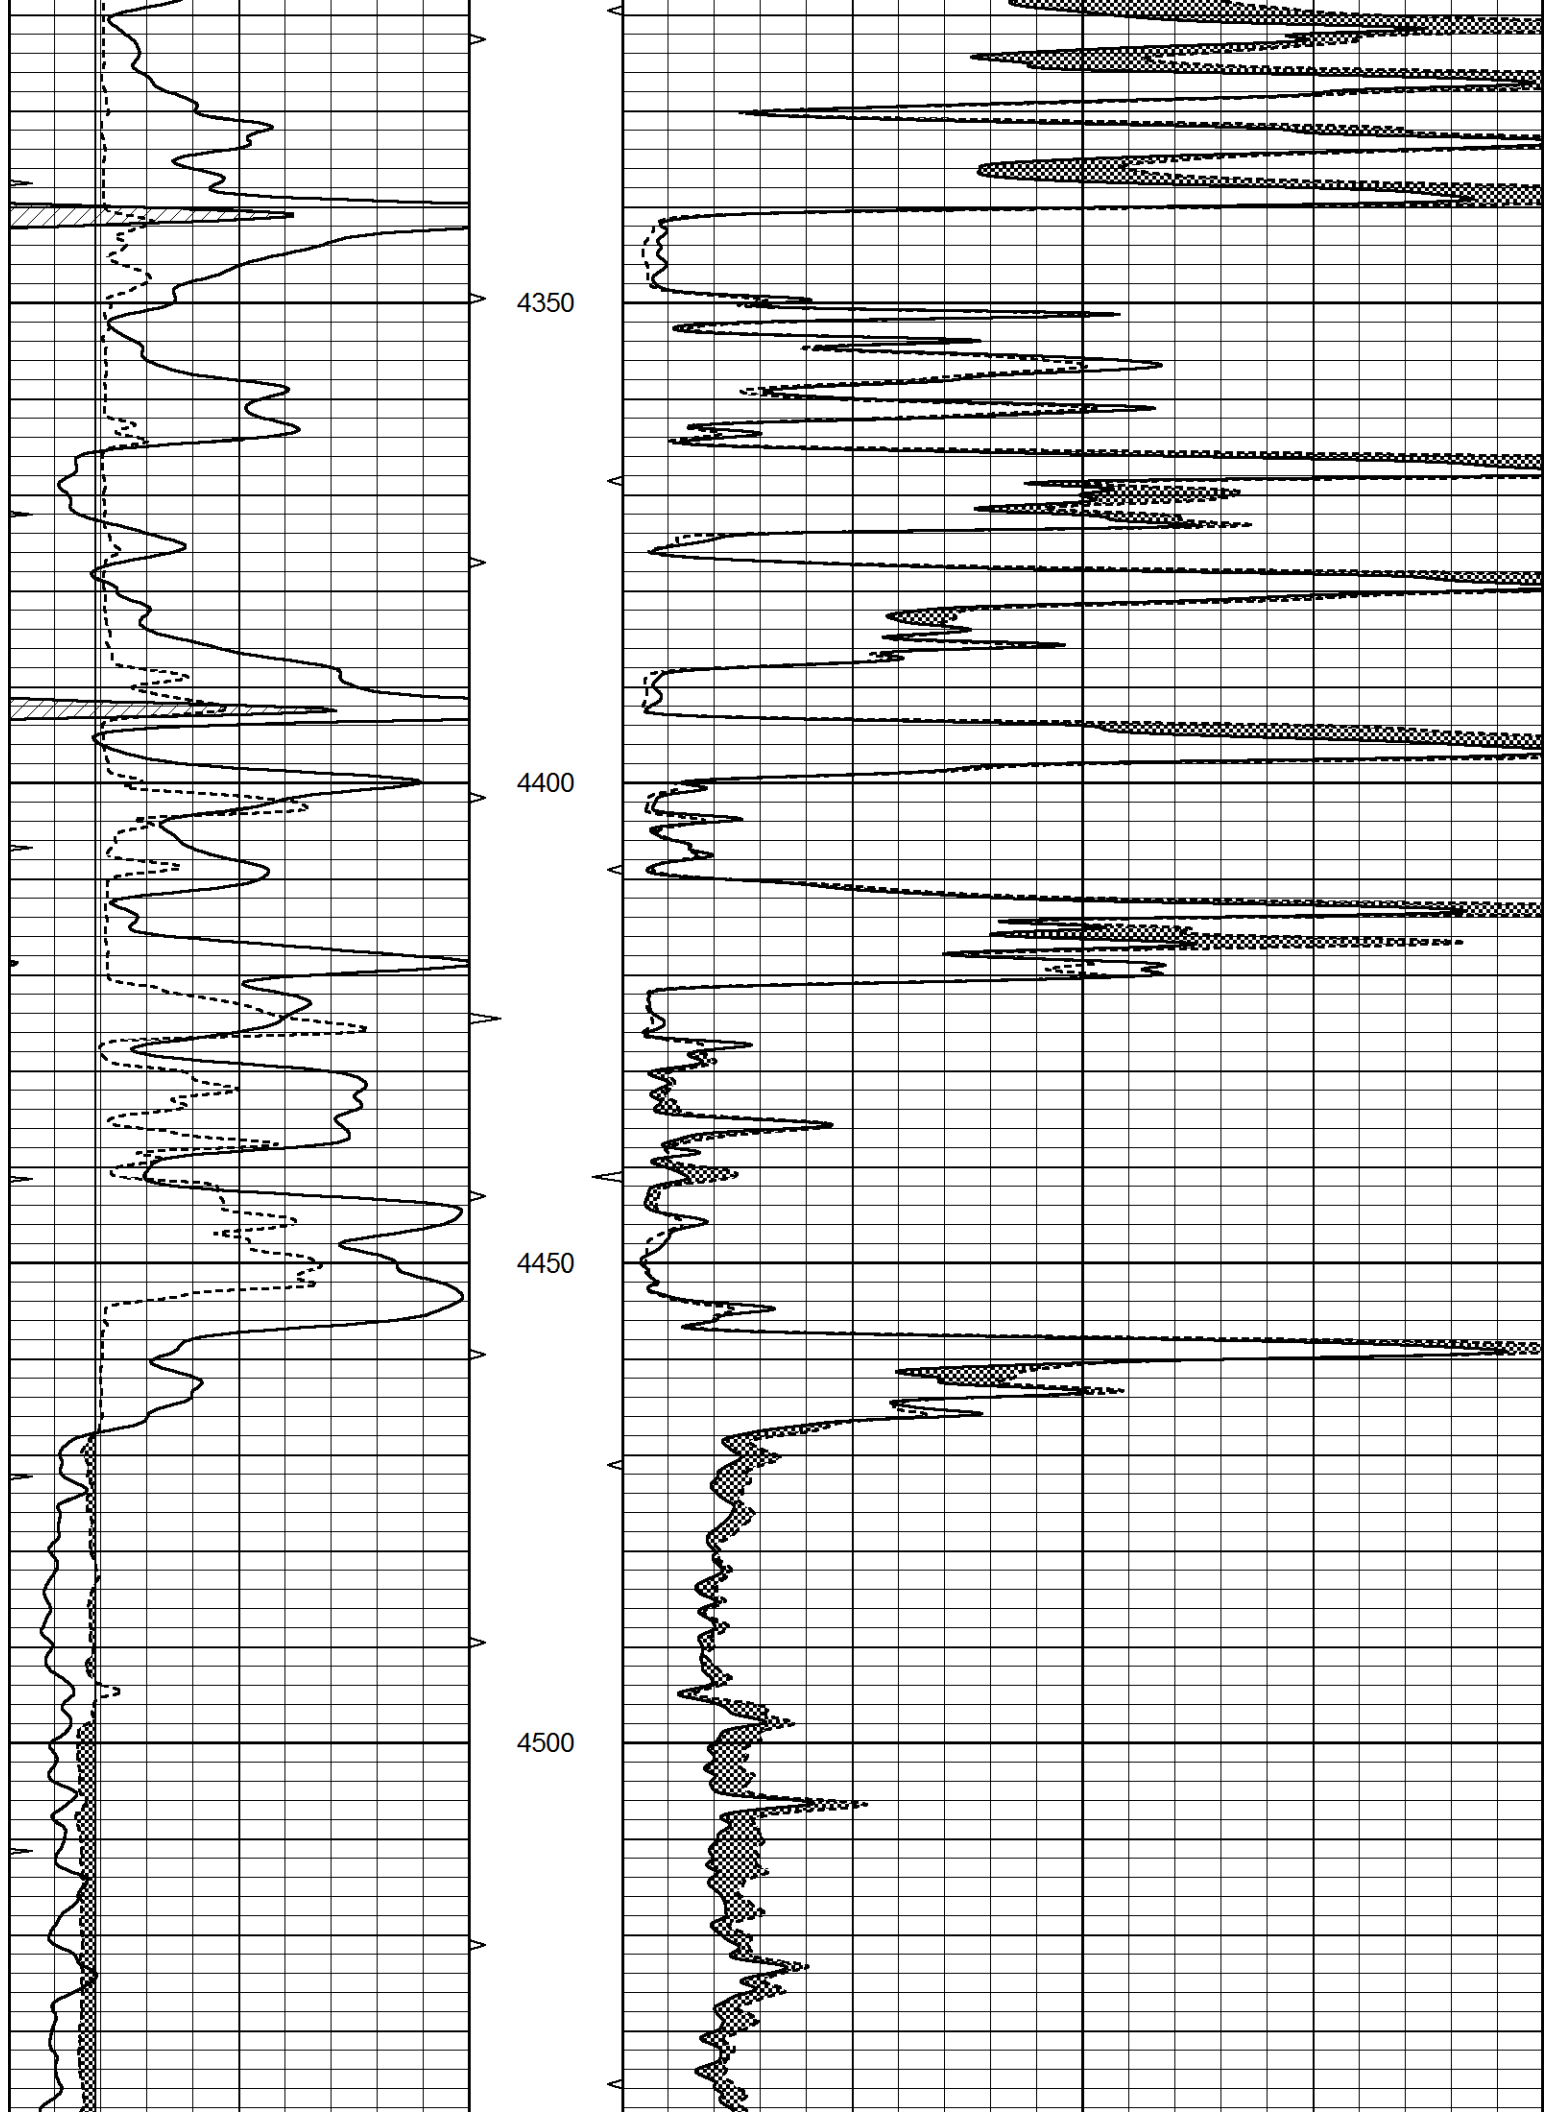

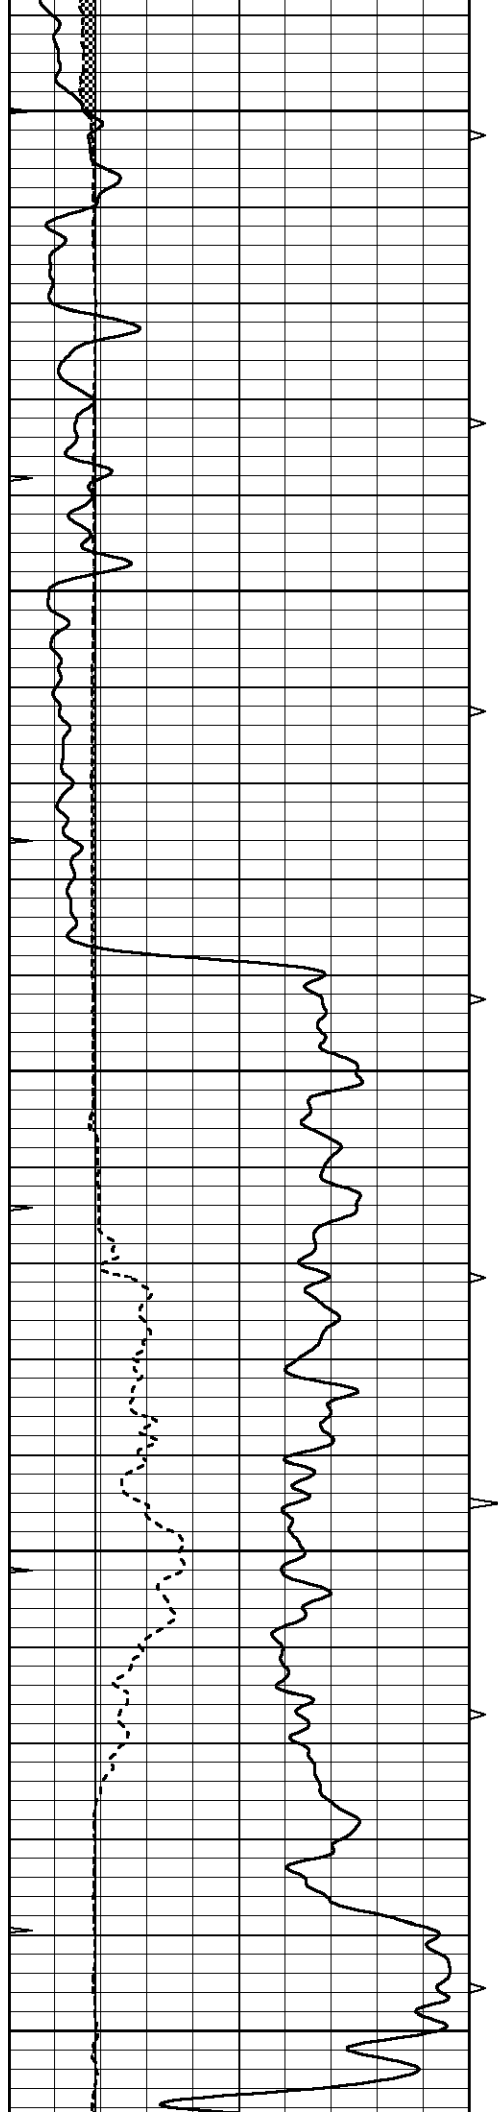


4550


4600

4650

4700

4750

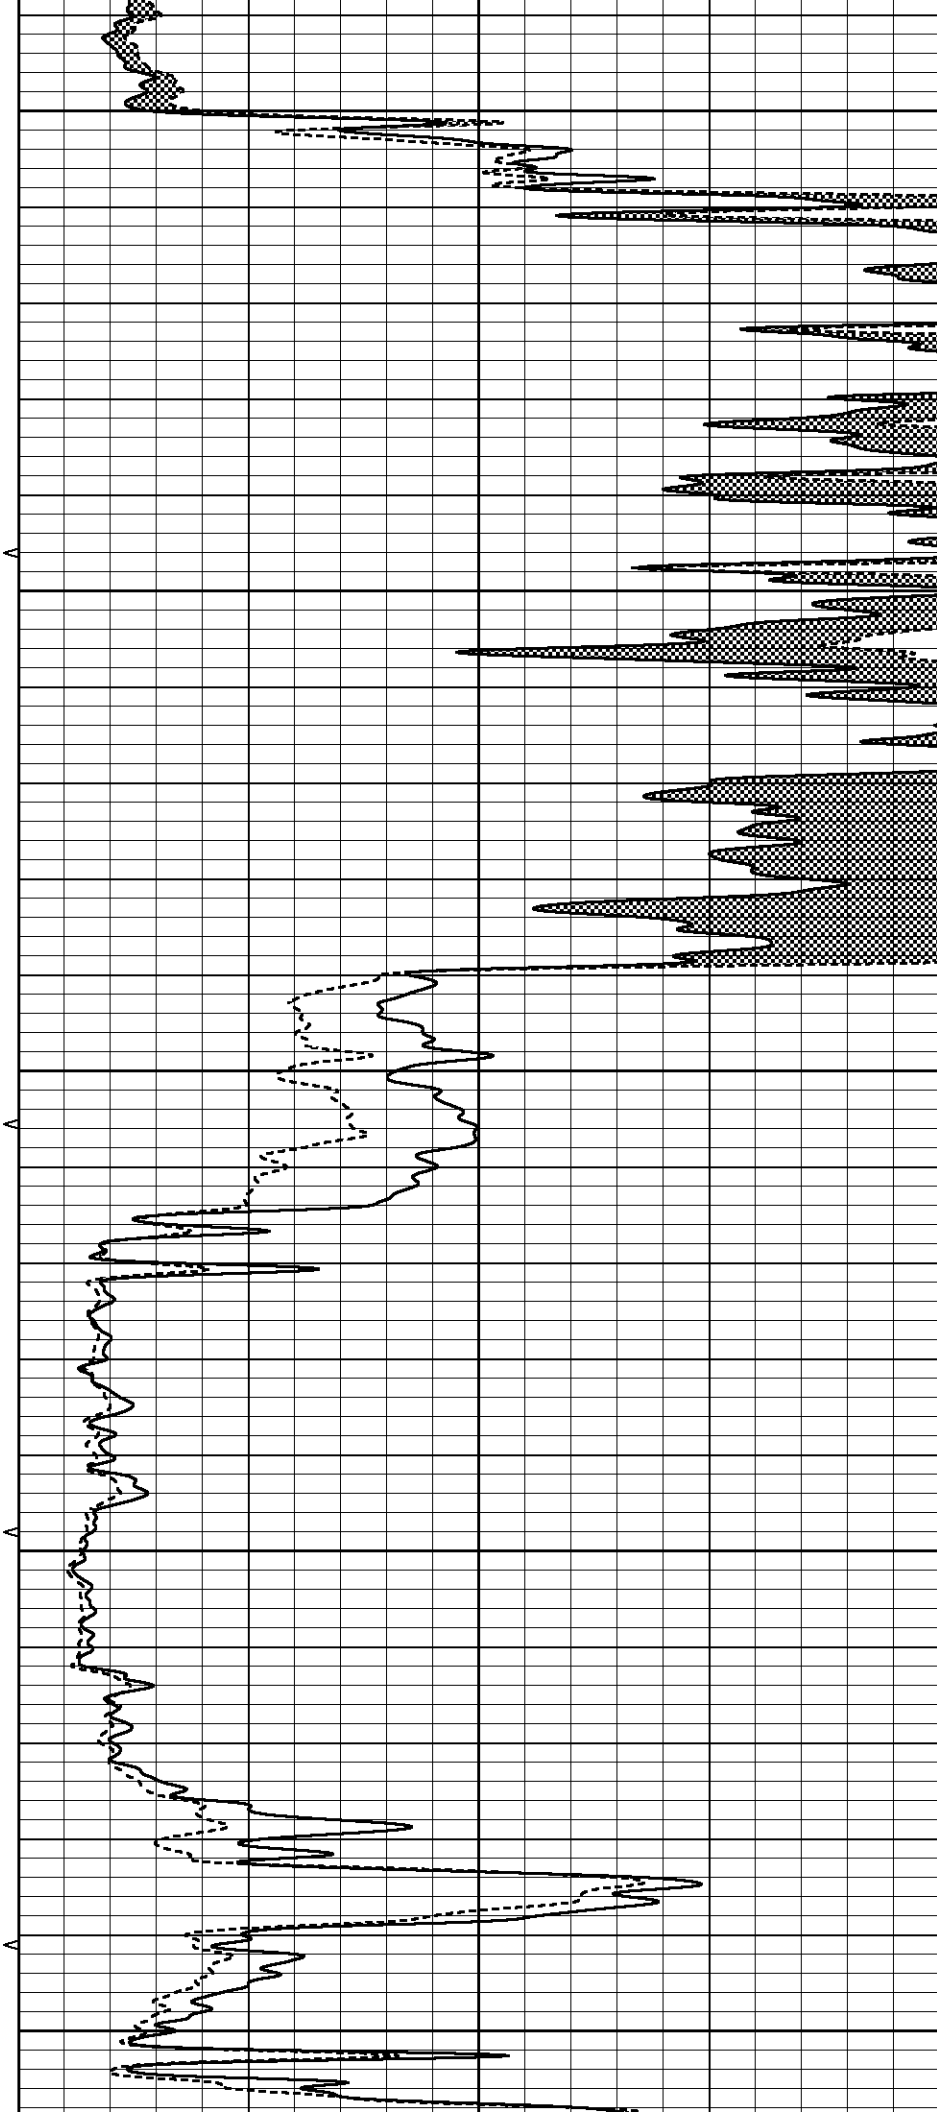

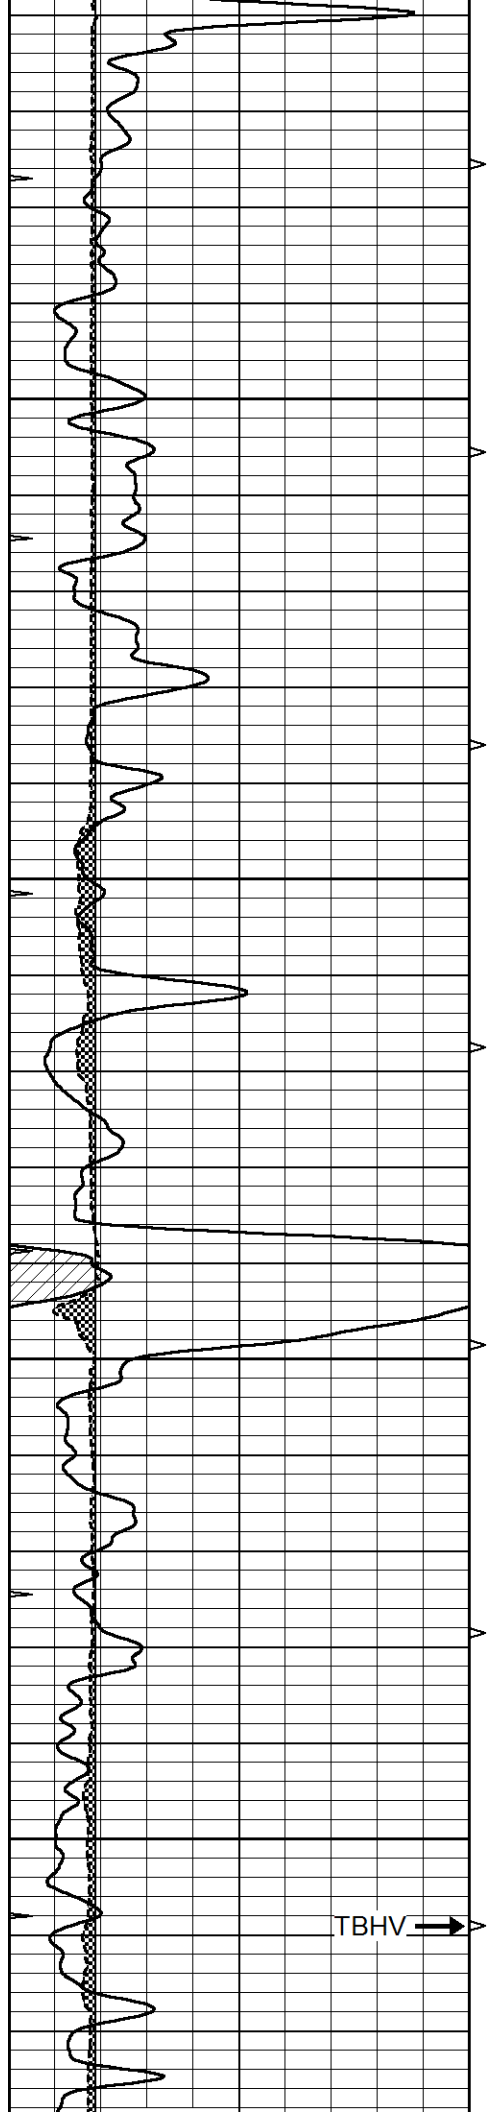

4800


4850


4900

5.5" ABHV

4950



TBHV →

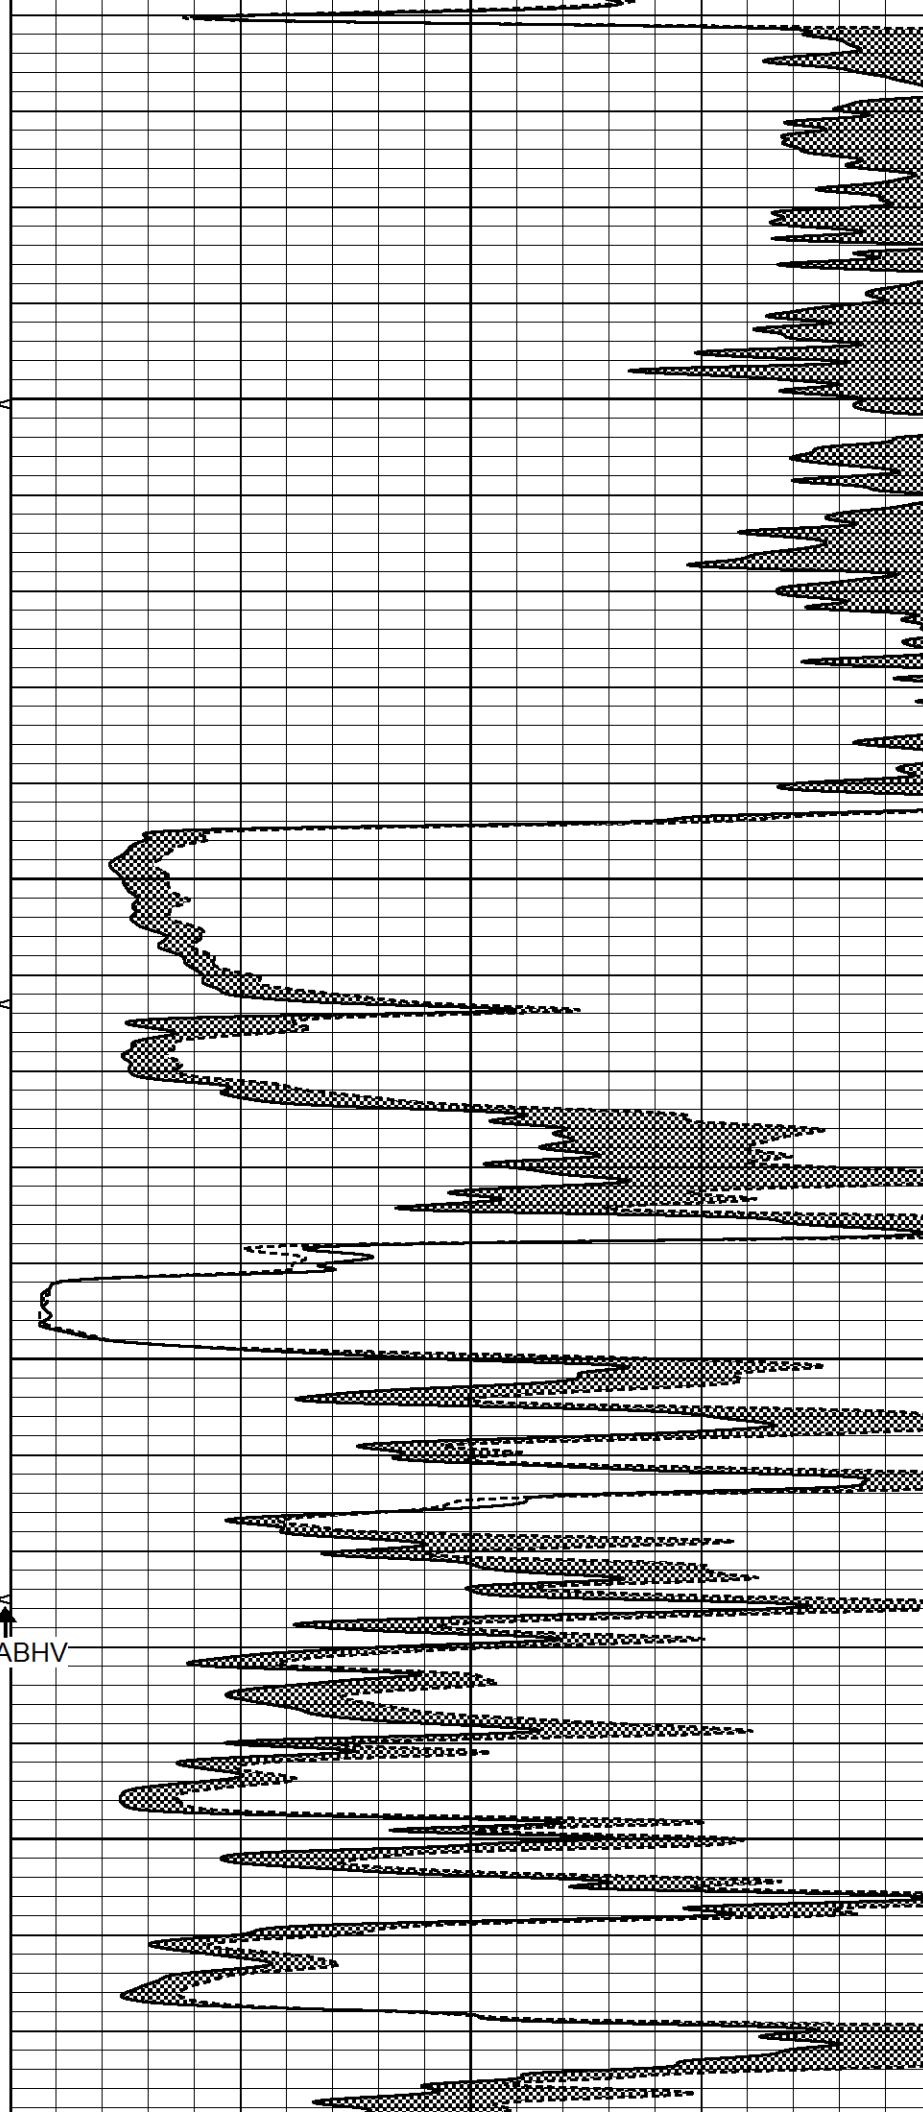


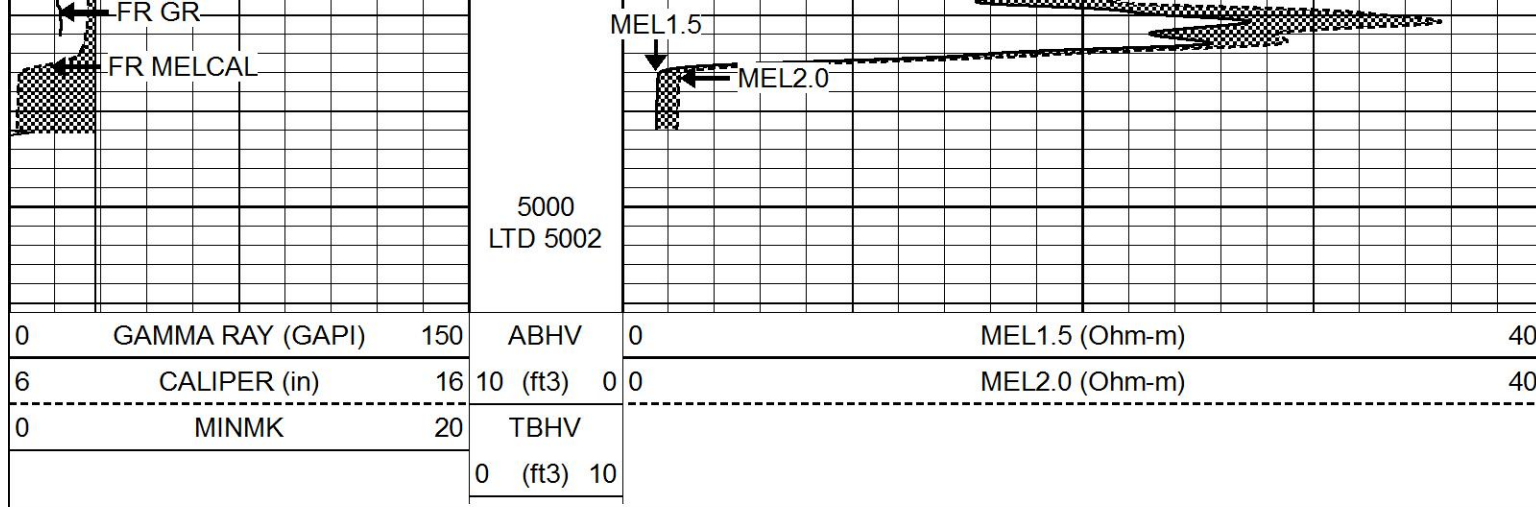

REPEAT SECTION

Database File 7446pe.db
 Dataset Pathname pass5.4
 Presentation Format _micro
 Dataset Creation Wed Jan 25 08:39:08 2023
 Charted by Depth in Feet scaled 1:240

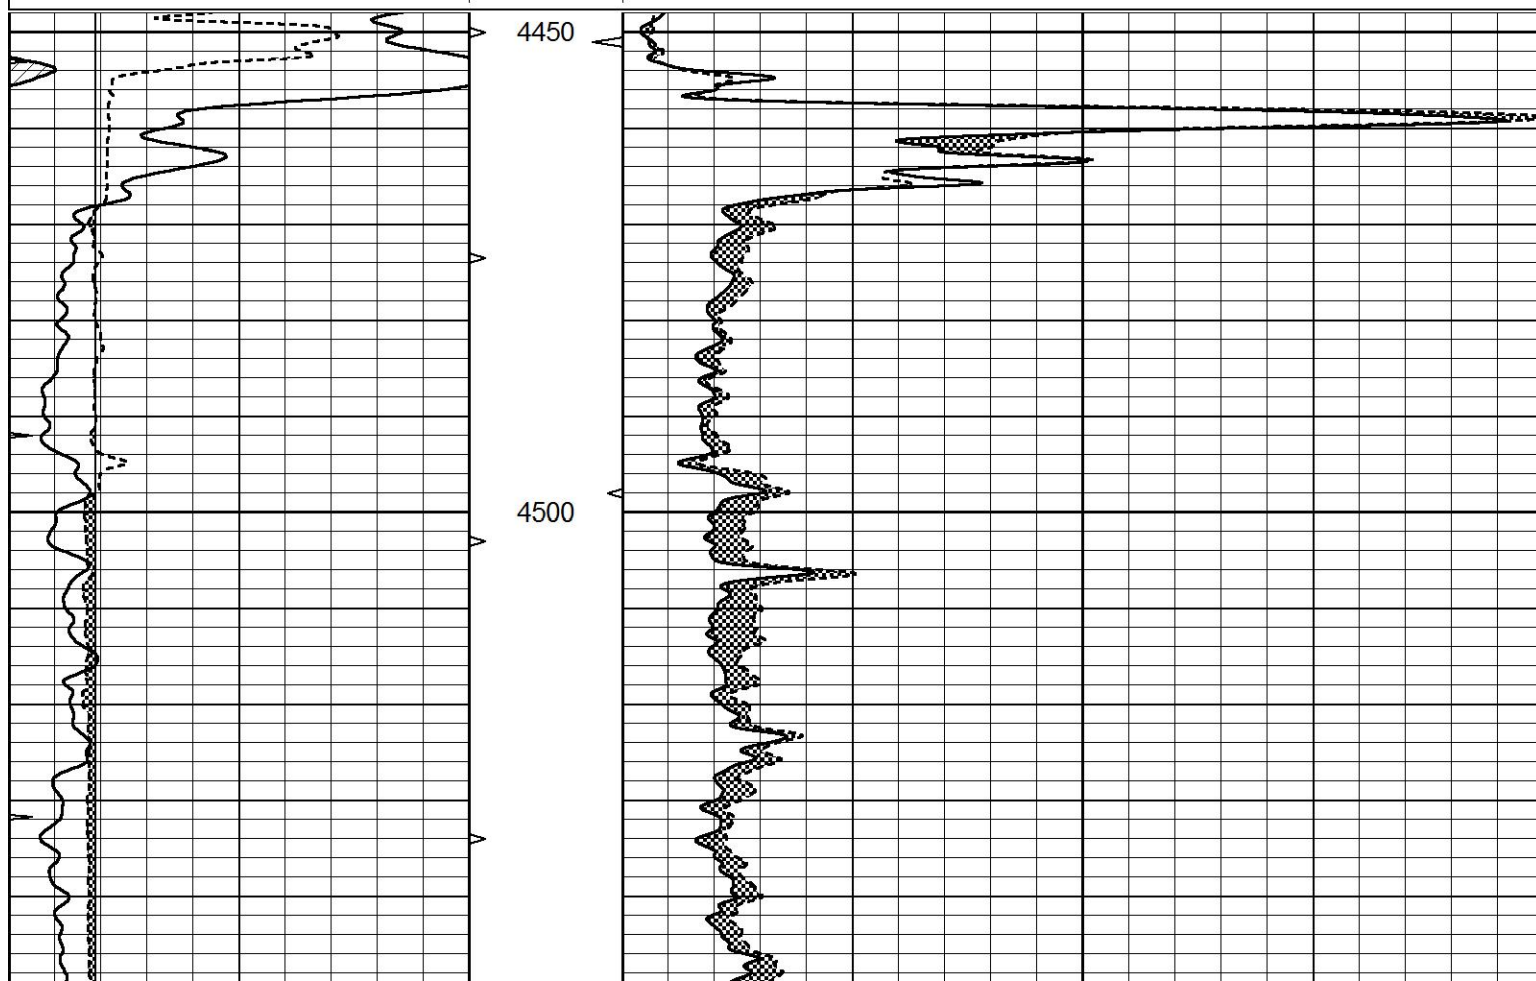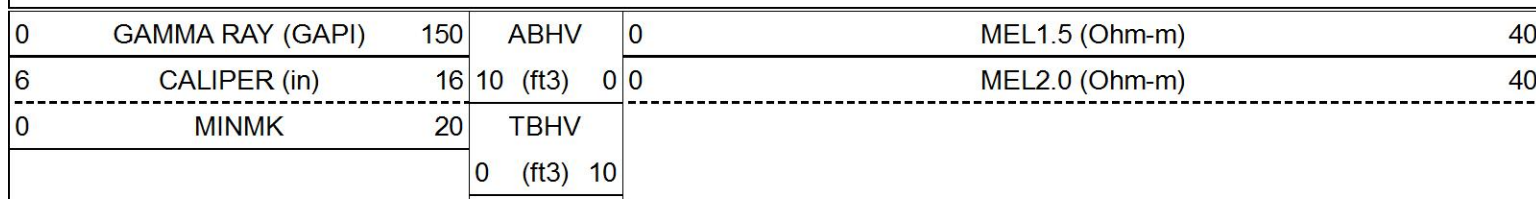

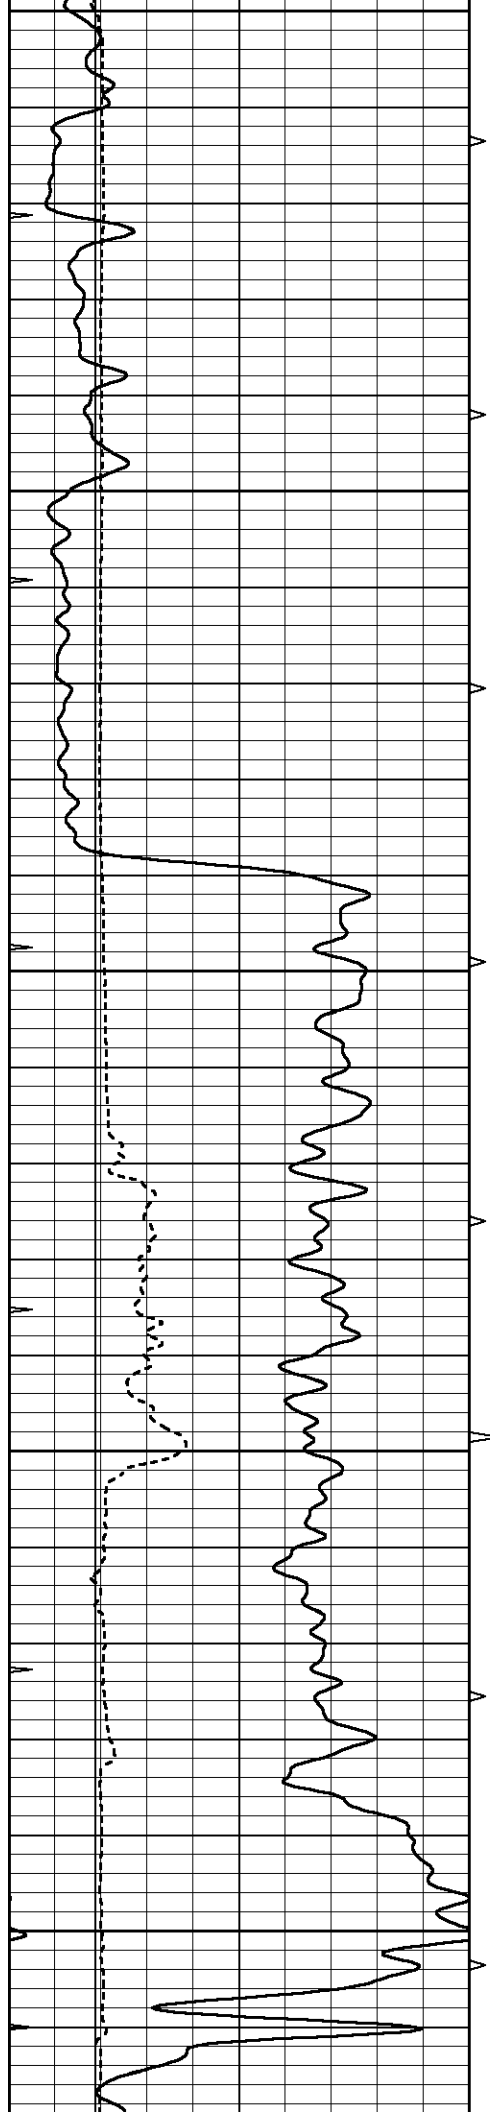


4550


4600

4650

4700

4750

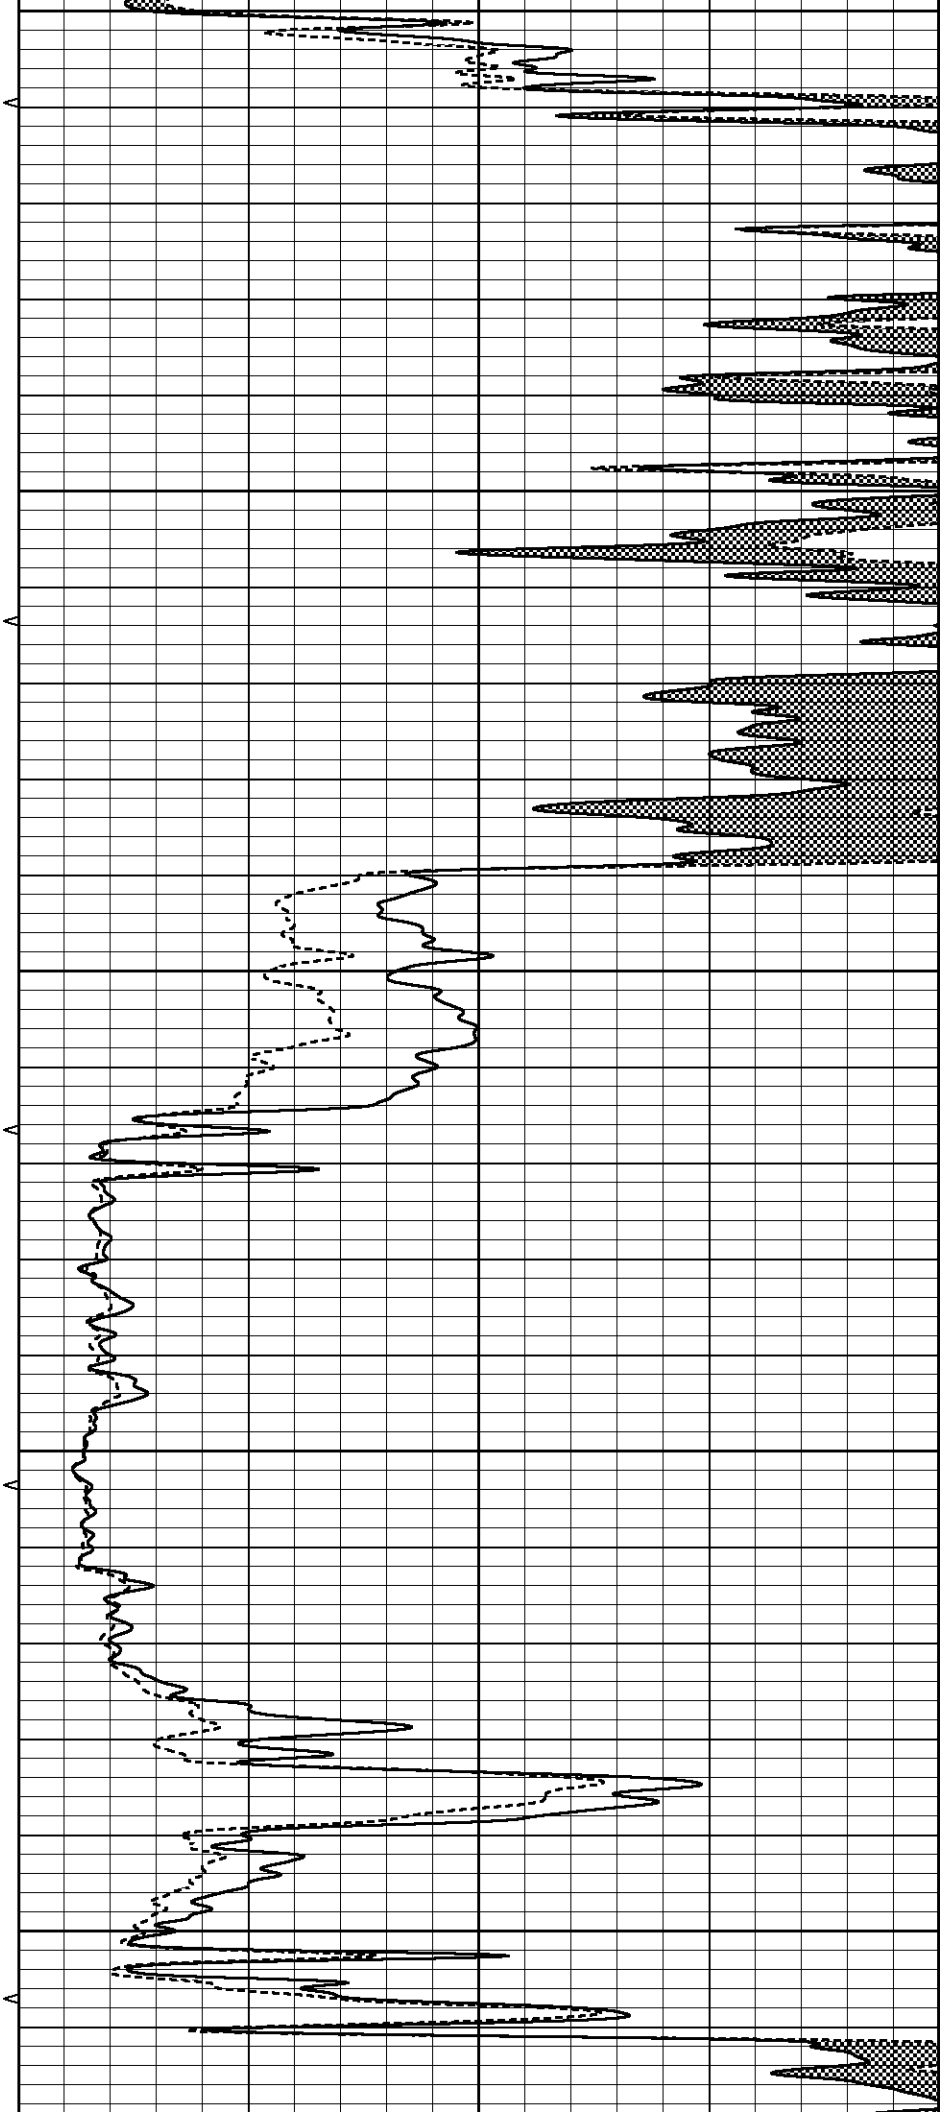

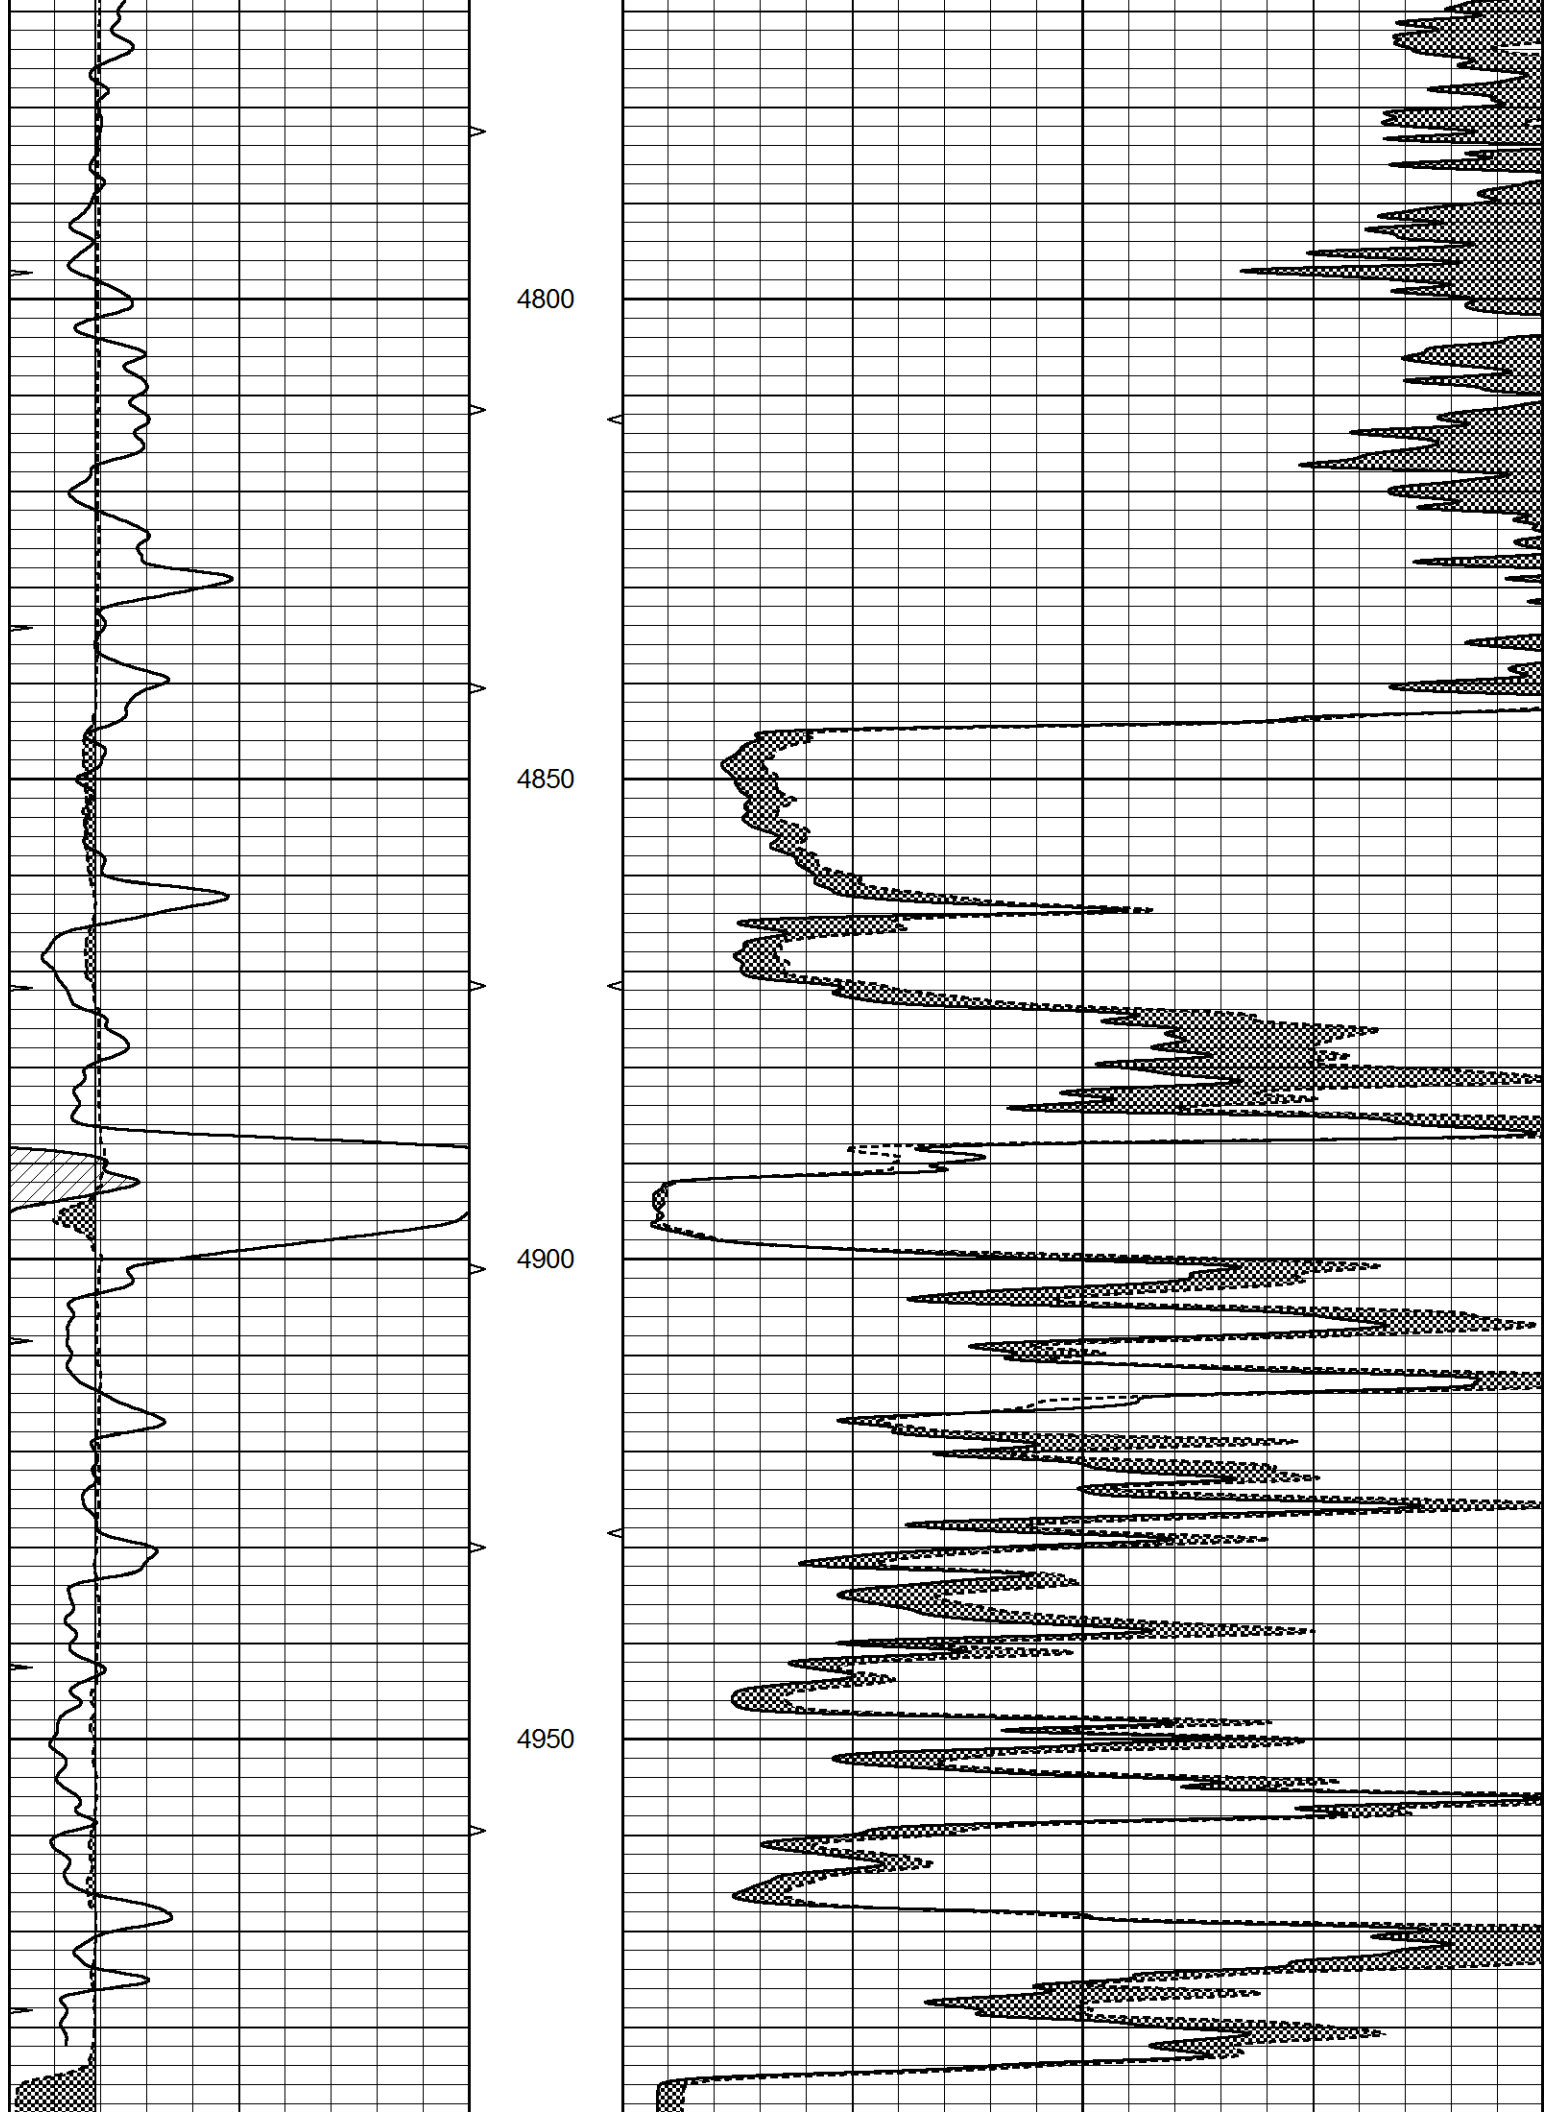

			5000													
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)										40	
6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)										40
0	MINMK	20	TBHV													
			0 (ft3)	10												