



MICRO LOG

Company	SECURE EXPL. & PRODUCTION	Company	SECURE EXPLORATION & PRODUCTION, LLC.
Well	HATFIELD / MERRITT #1	Well	HATFIELD / MERRITT #1
Field	STEWART	Field	STEWART
County	FINNEY	County	FINNEY
State	KANSAS	State	KANSAS
Location:	API # : 15-055-22606-0000 2310' FSL & 2300' FEL E/2 - NW - NW - SE	Other Services CDL/CNL/PE DIL/SONIC	
Permanent Datum	GROUND LEVEL	Elevation	2878
Log Measured From	KELLY BUSHING 11' A.G.L	K.B. 2889 D.F. 2887 G.L. 2878	
Drilling Measured From	KELLY BUSHING		
Date	2/17/24		
Run Number	TWO		
Depth Driller	4930		
Depth Logger	4932		
Bottom Logged Interval	4916		
Top Log Interval	3800		
Casing Driller	8.675@465		
Casing Logger	465		
Bit Size	7.785		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,000 PPM	
Density / Viscosity	9.5/60		
pH / Fluid Loss	11.0/6.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.50@52F		
Rmf @ Meas. Temp	1.13@52F		
Rmc @ Meas. Temp	1.80@52F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.629@124F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	1:15 A.M.		
Maximum Recorded Temperature	124F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS	JEREMEY PASEK	
Witnessed By	WES HANSEN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-055-22606-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS. KANSAS (785) 628-6395
DIRECTIONS
GARDEN CITY, KS.,9E. ON HWY 156 TO "N. SHERMAN RD.", 3/4N., E. INTO




MAIN SECTION

Database File	8412pe.db
Dataset Pathname	pass7.5
Presentation Format	_micro
Dataset Creation	Sat Feb 17 03:27:54 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)		40		
6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)		40	
0	MINMK	20	TBHV				0	LTEN (lb)	5000
			0 (ft3)	10					

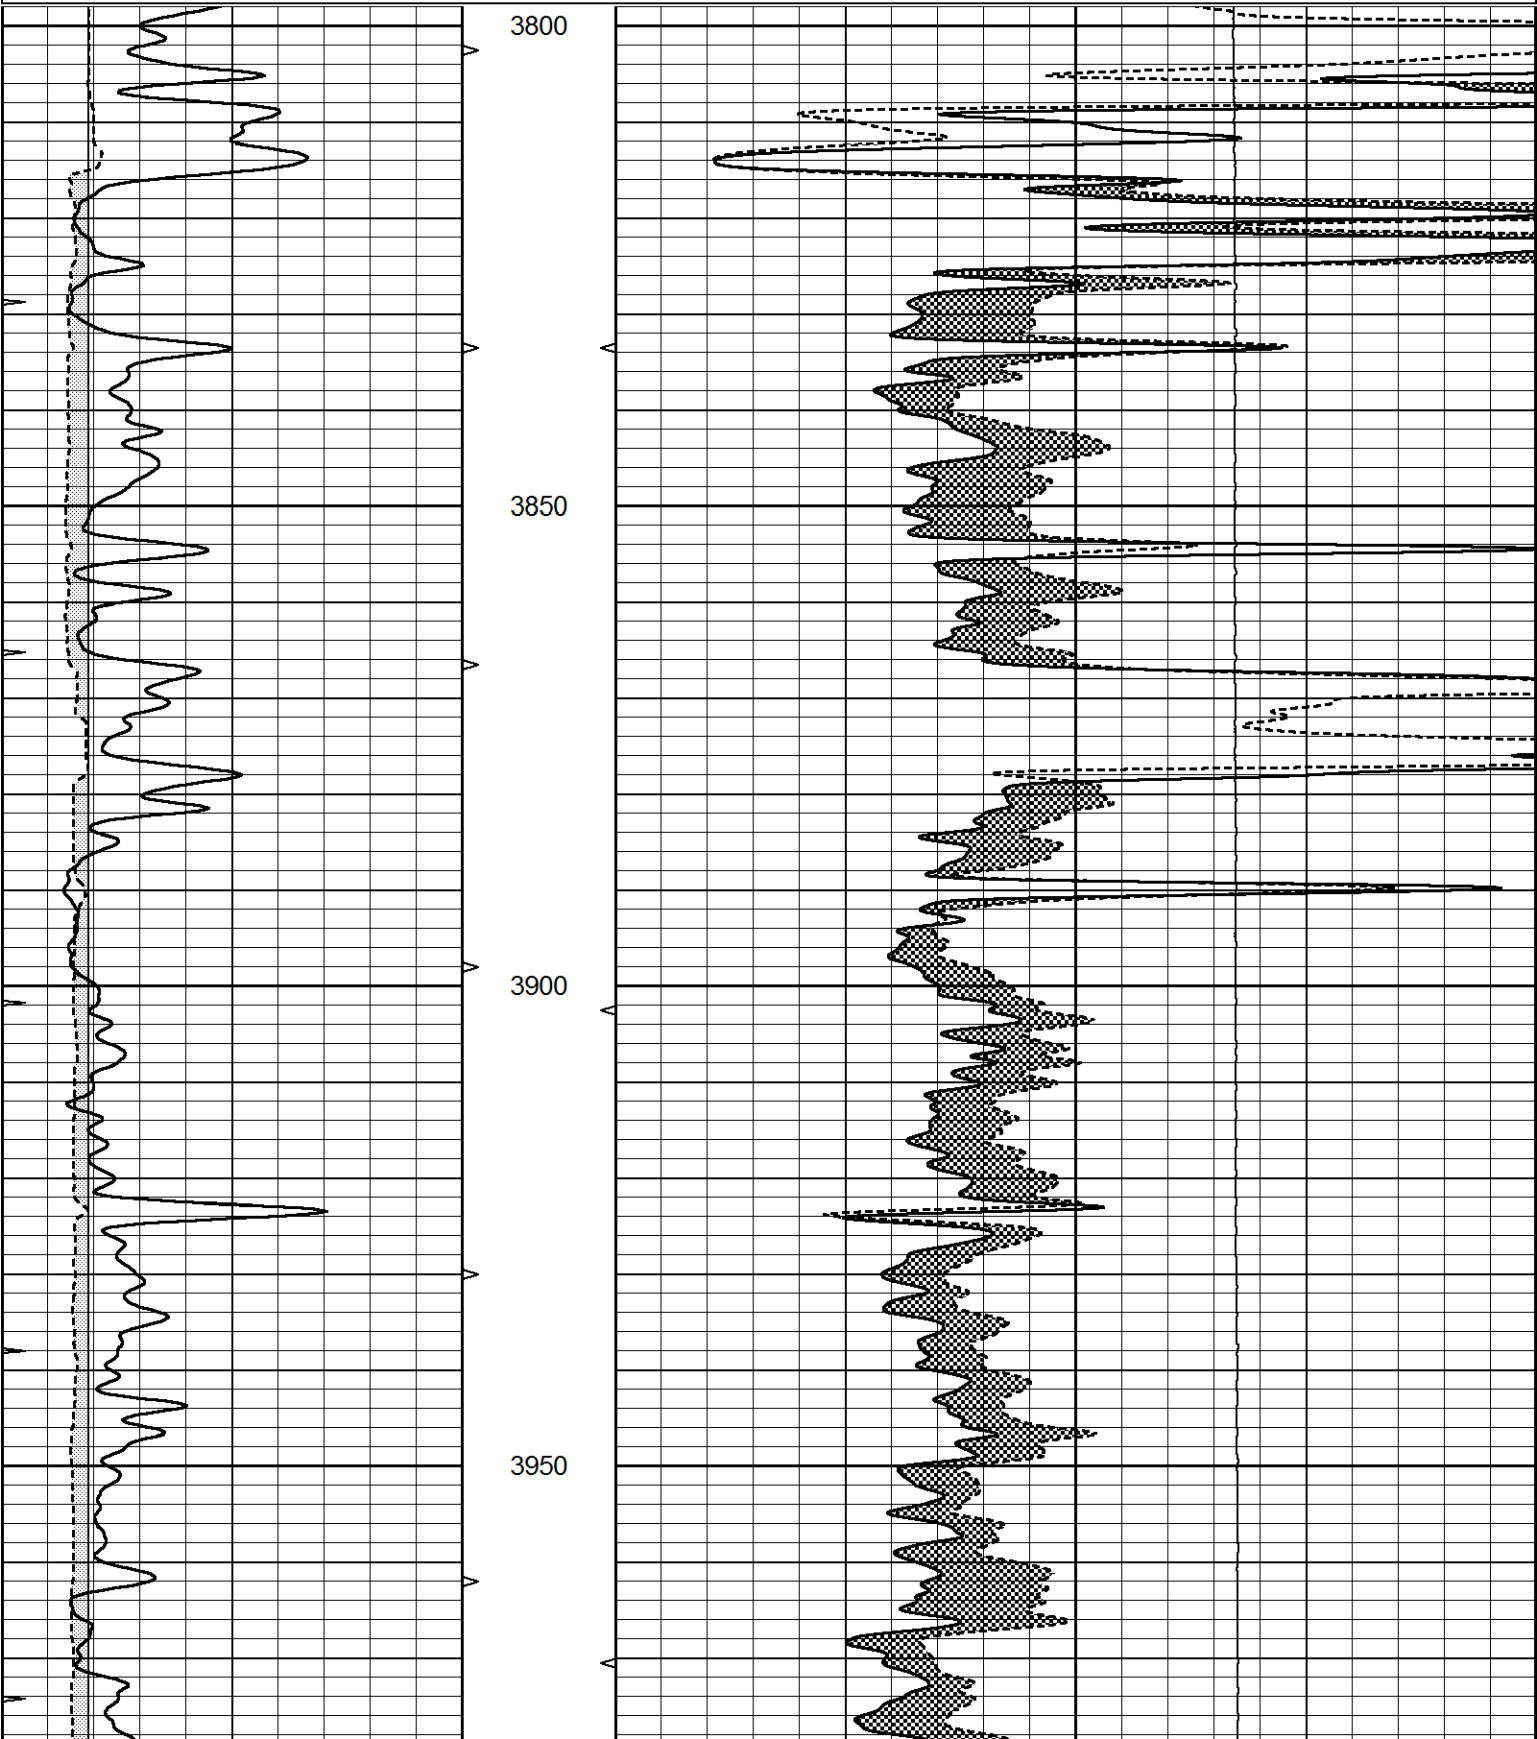

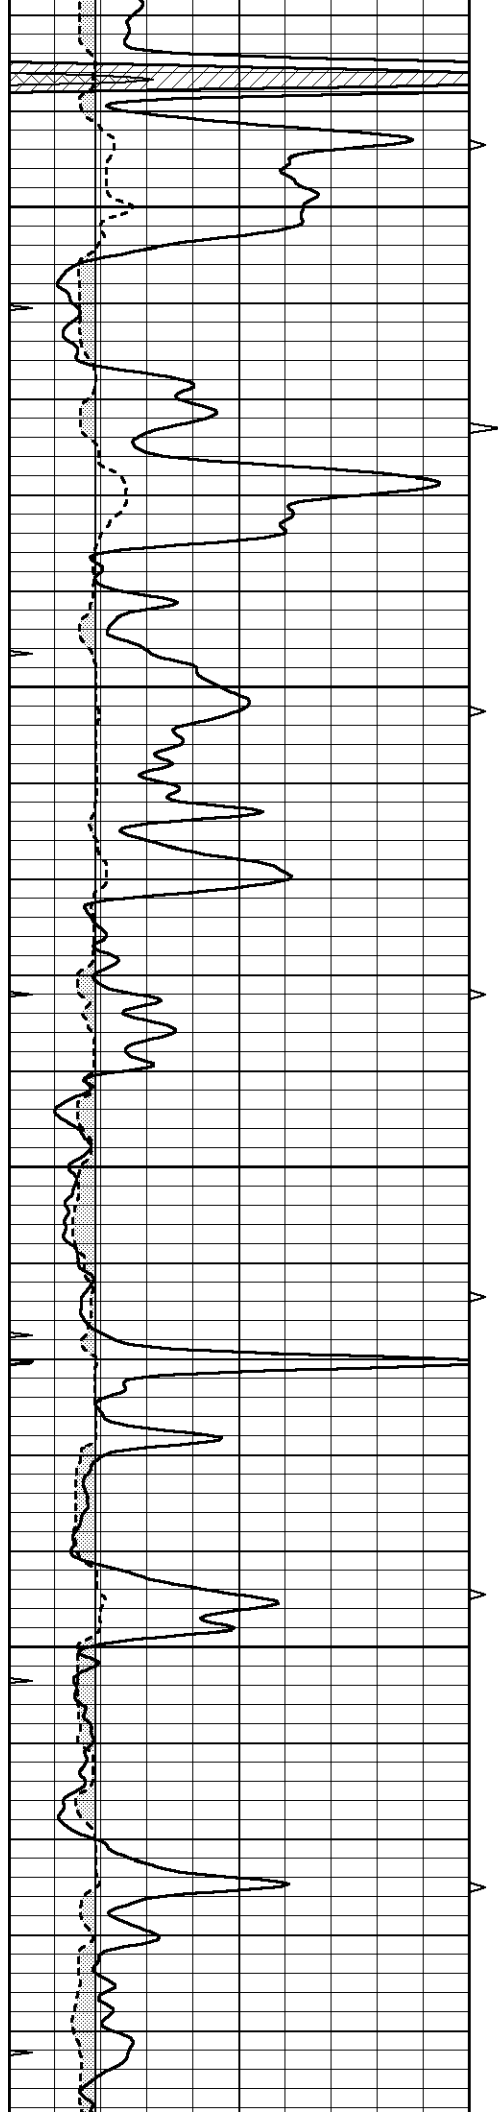



4000

4050

4100

4150

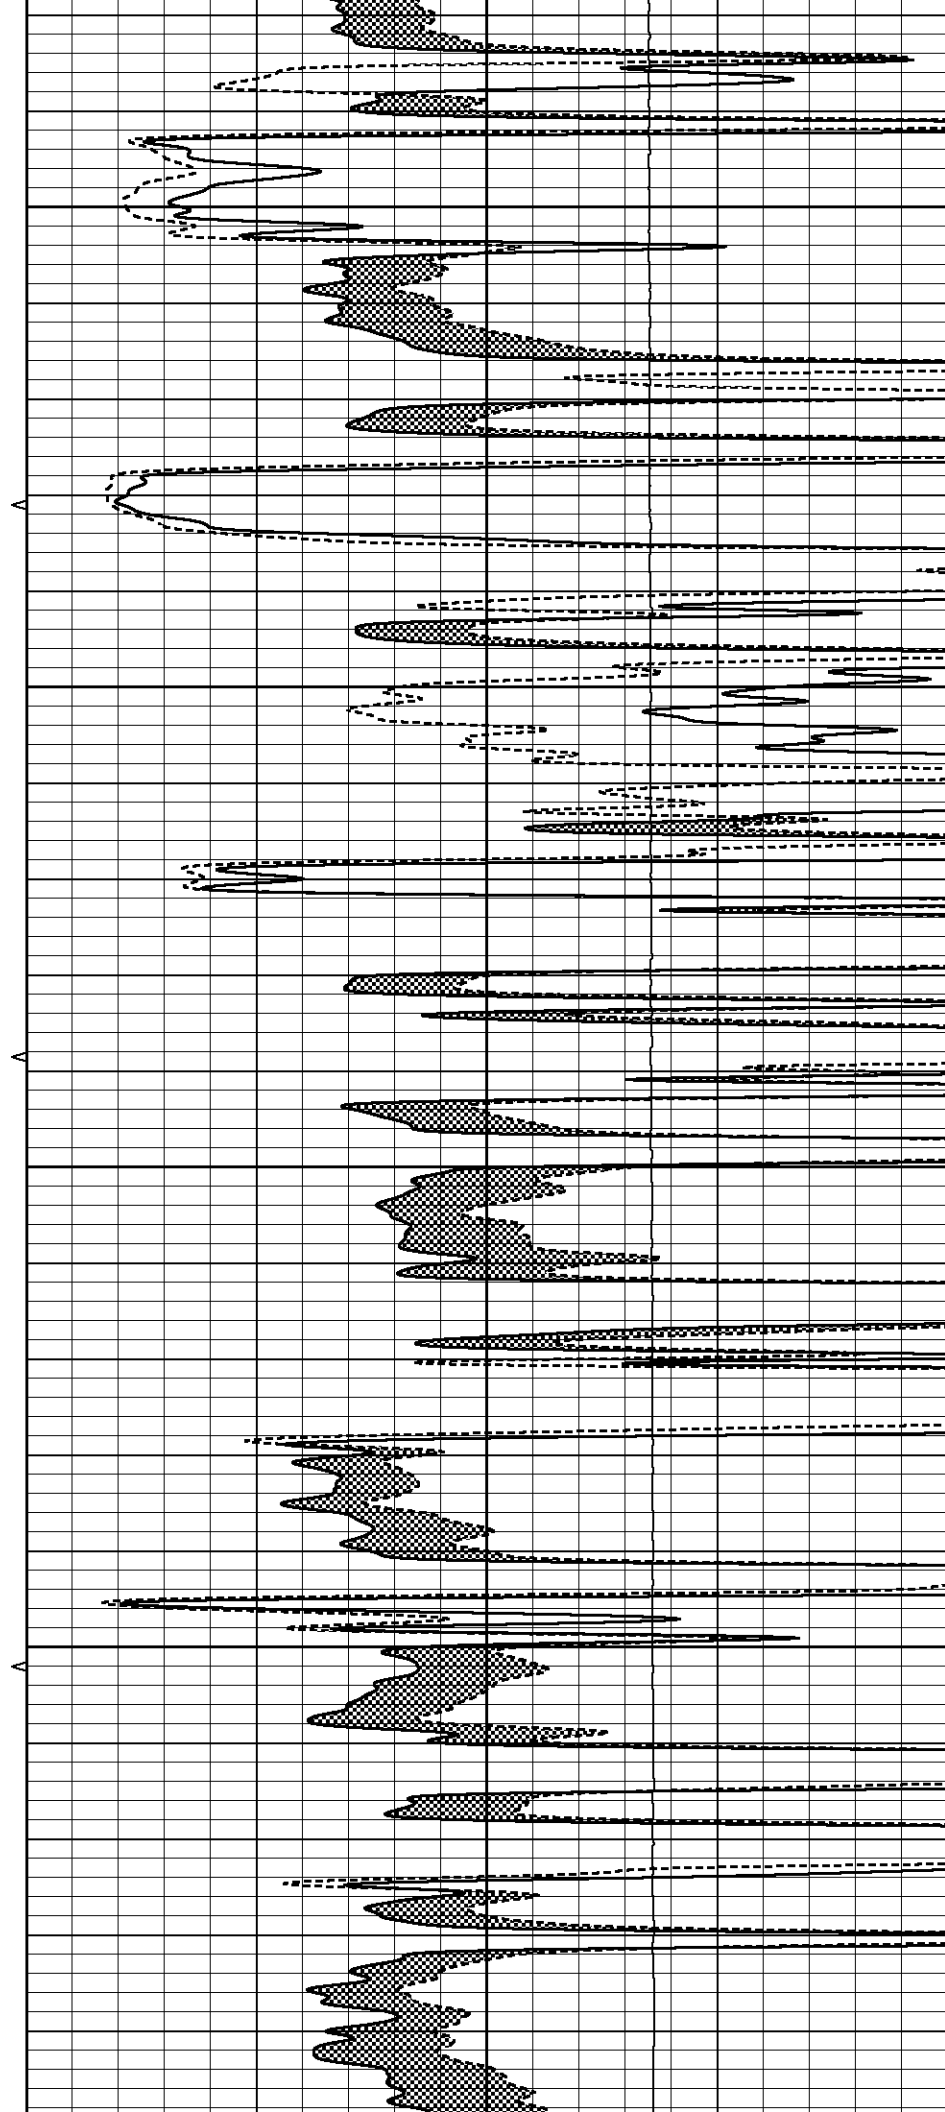

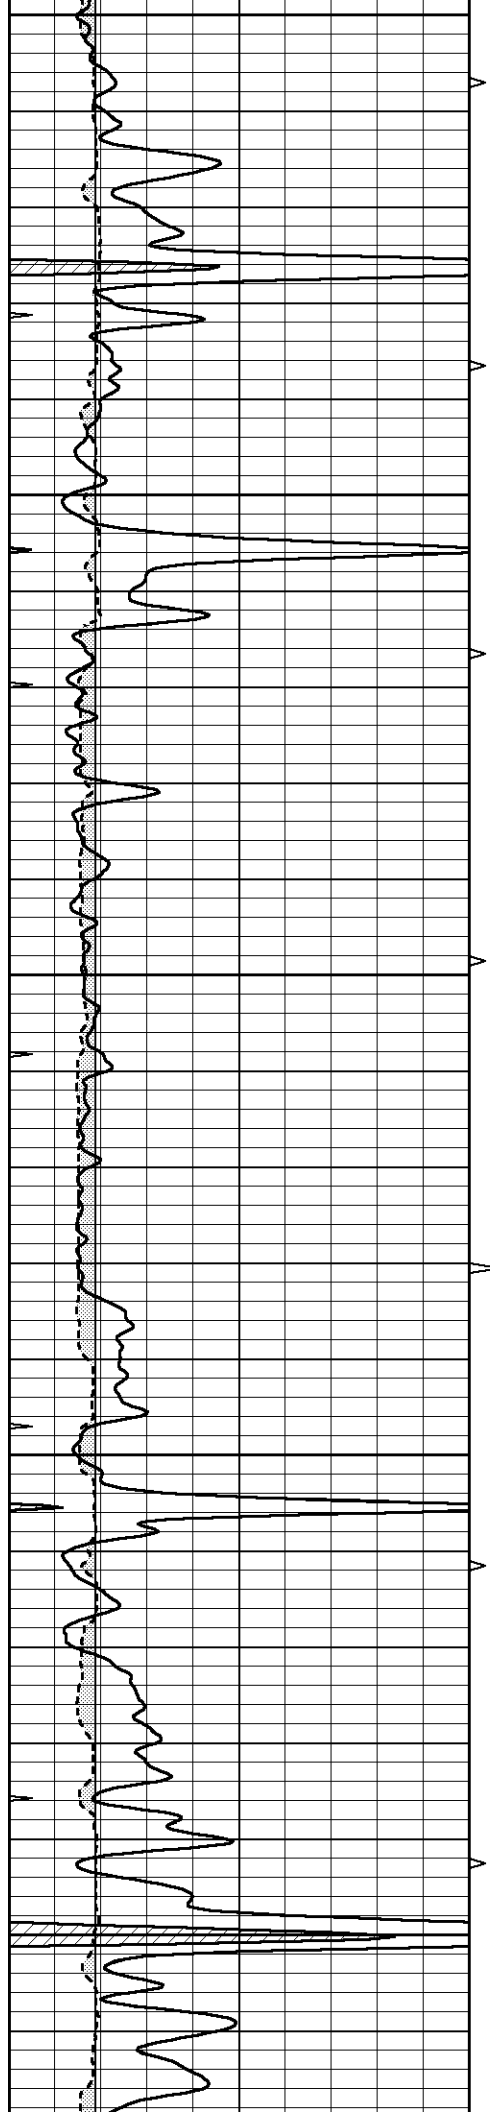


4200


4250

4300

4350

4400

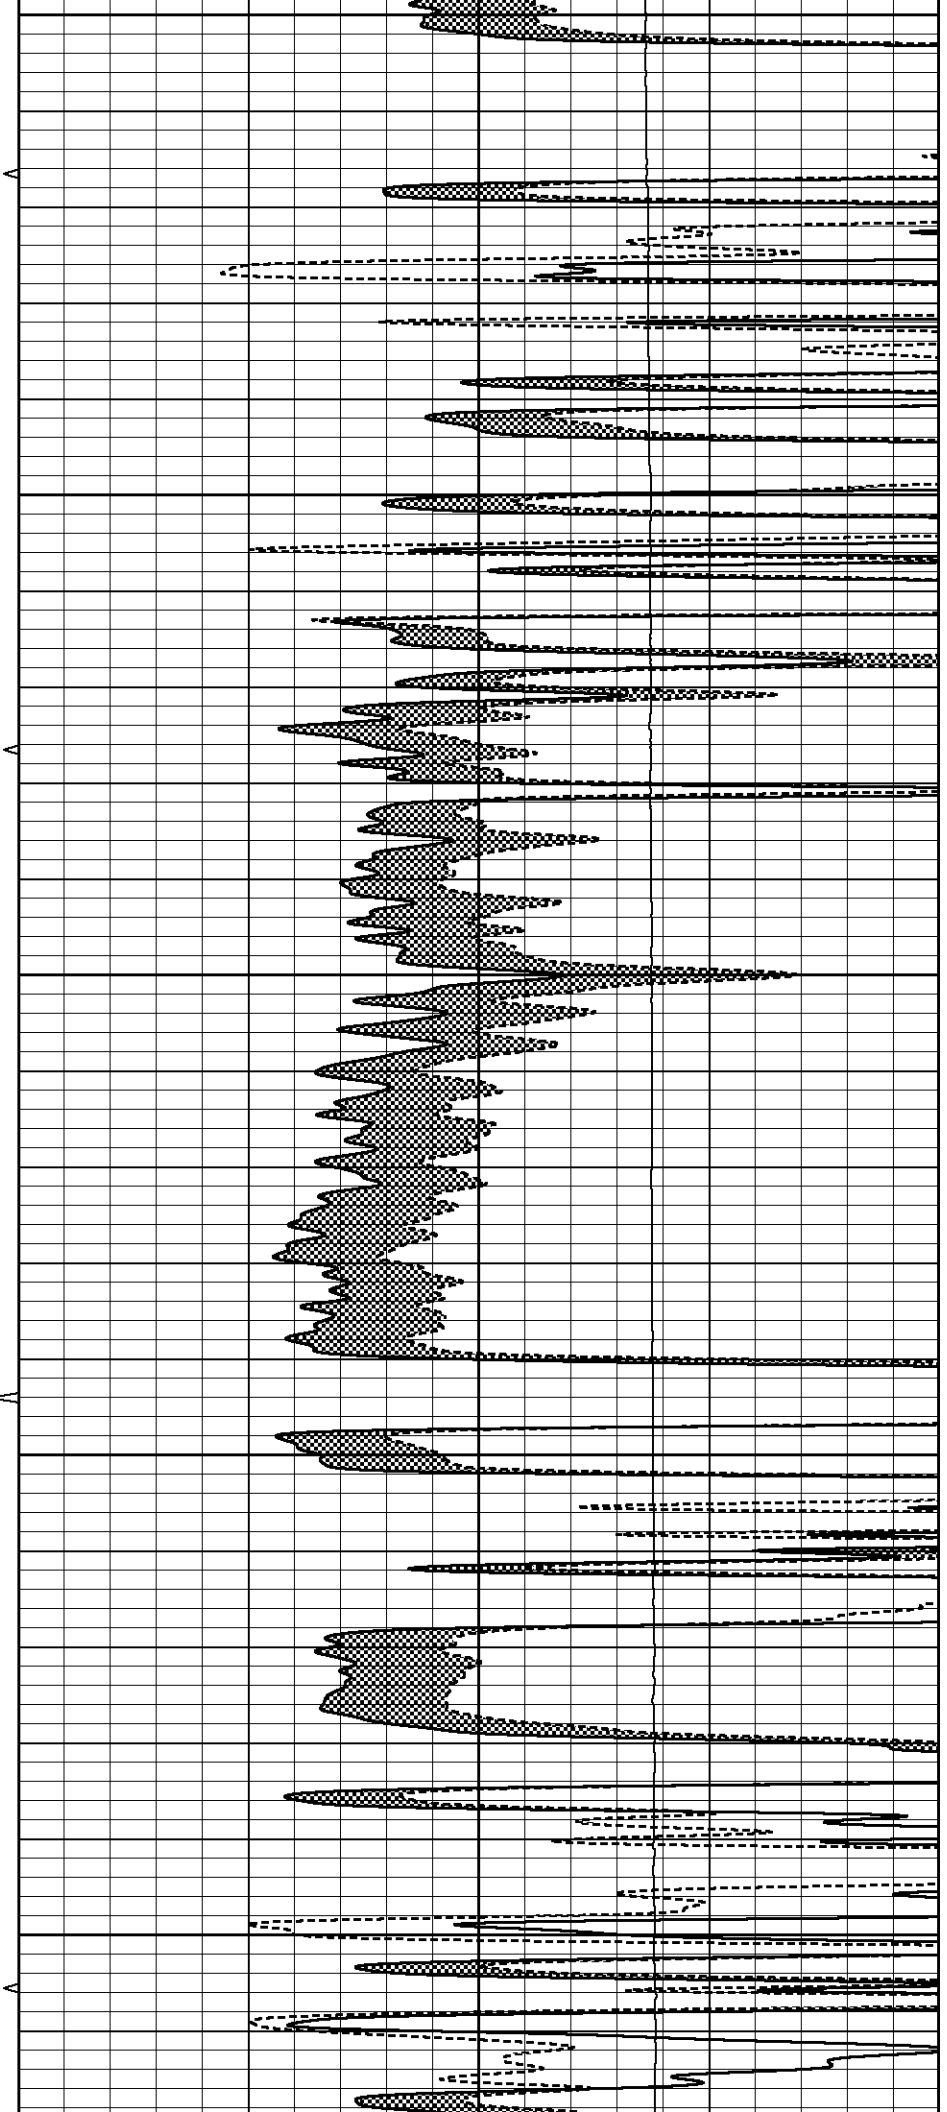

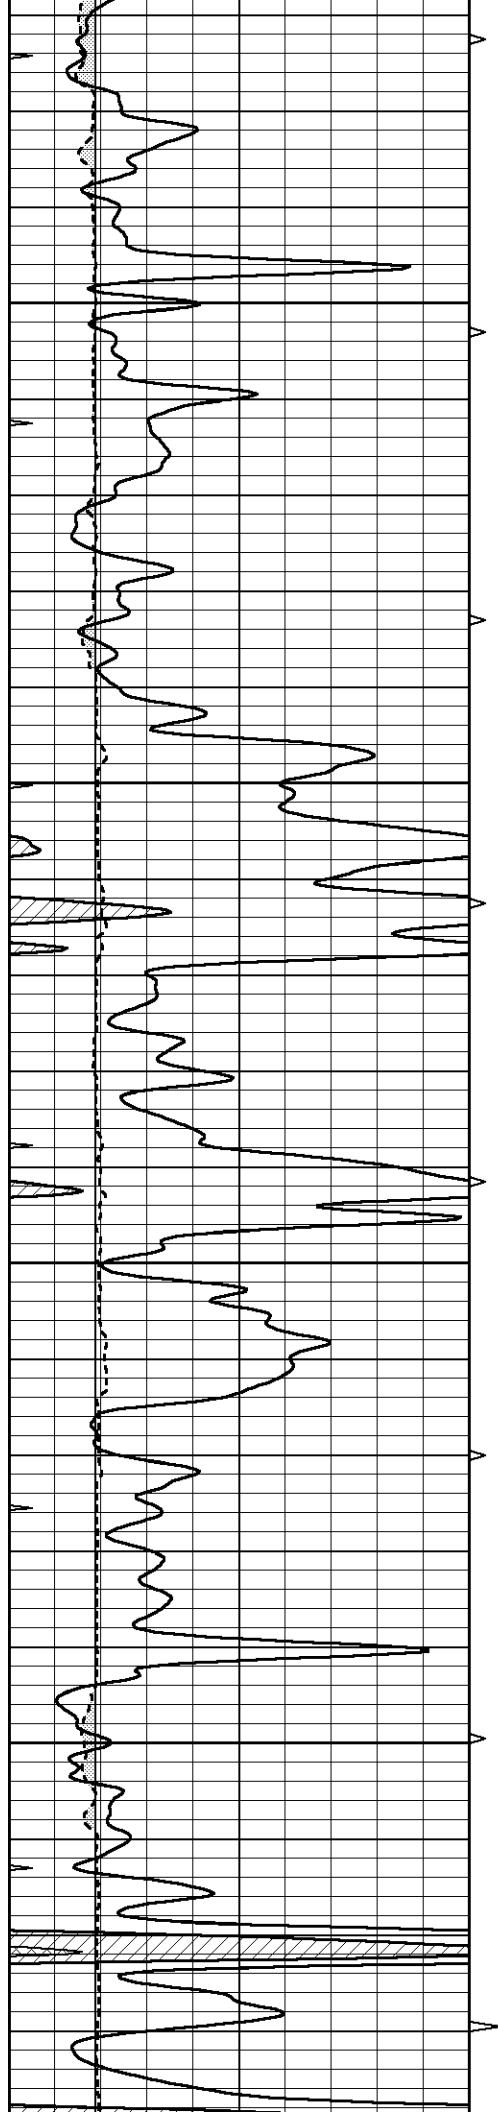



4450

4500

4550

4600

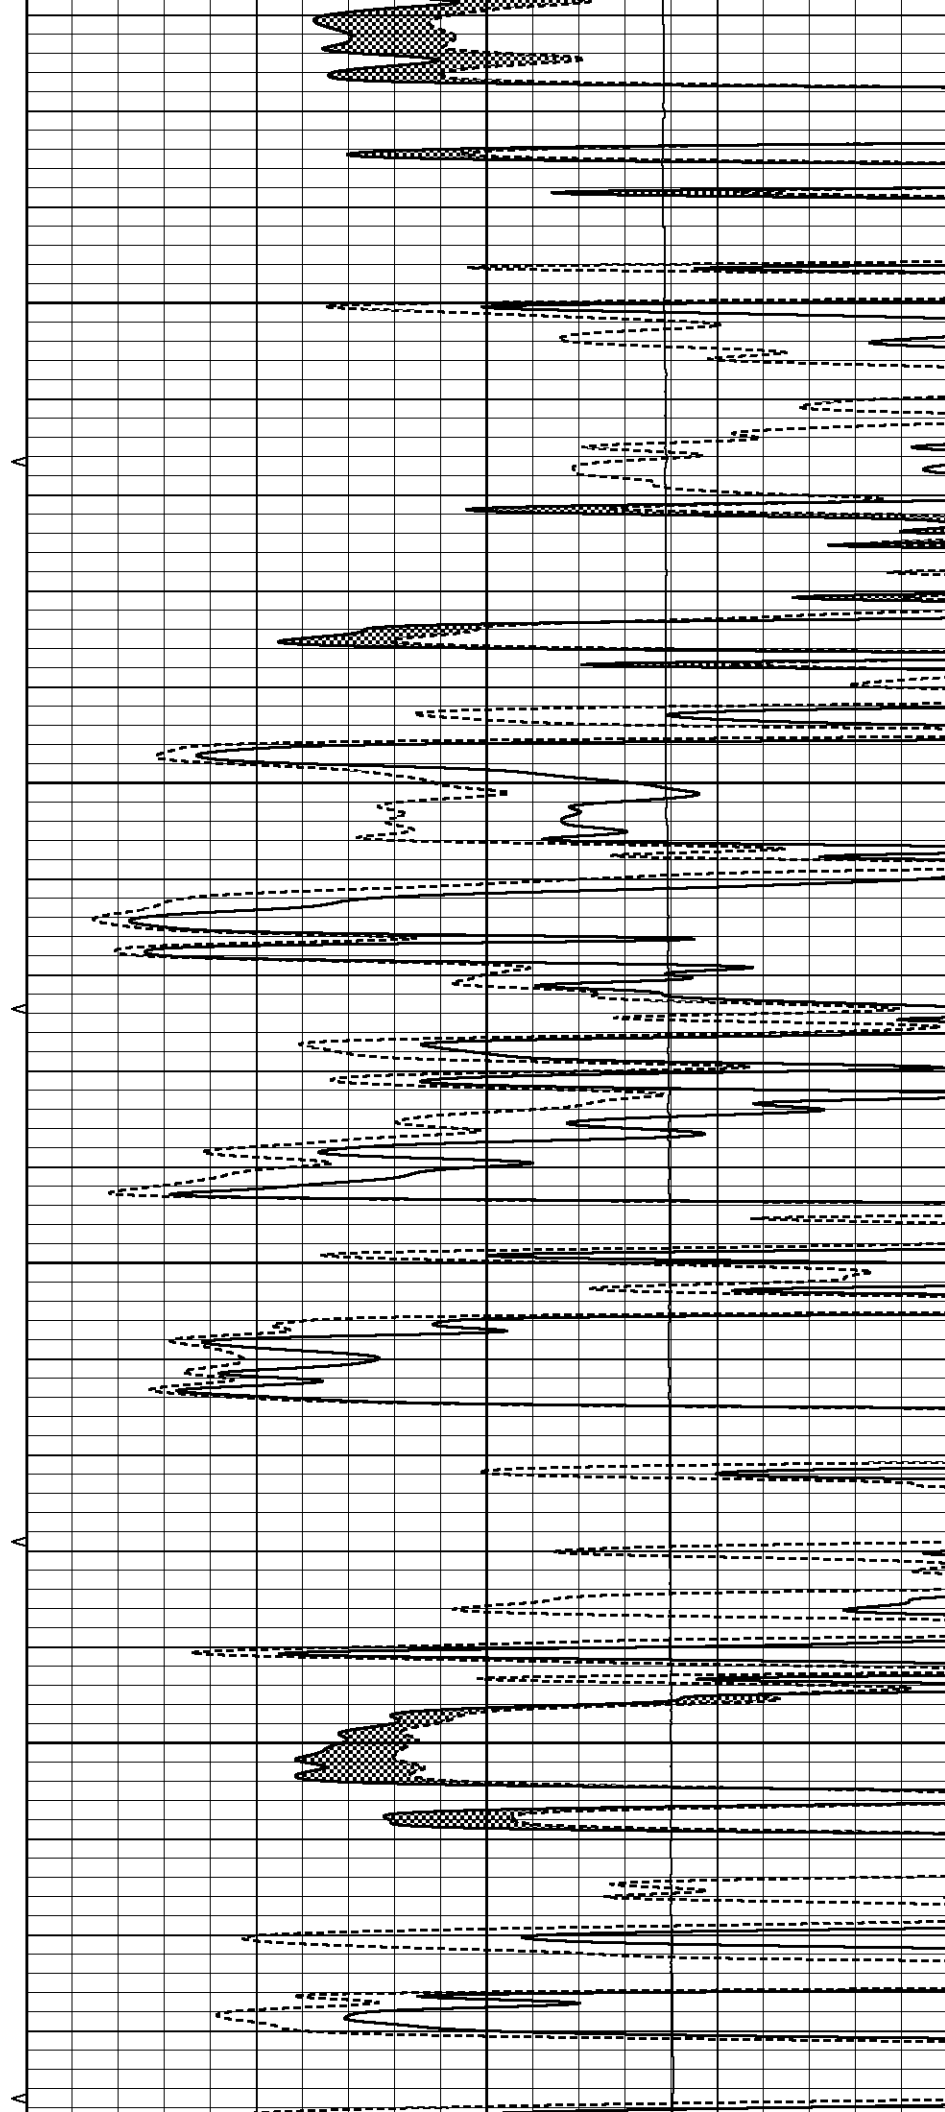

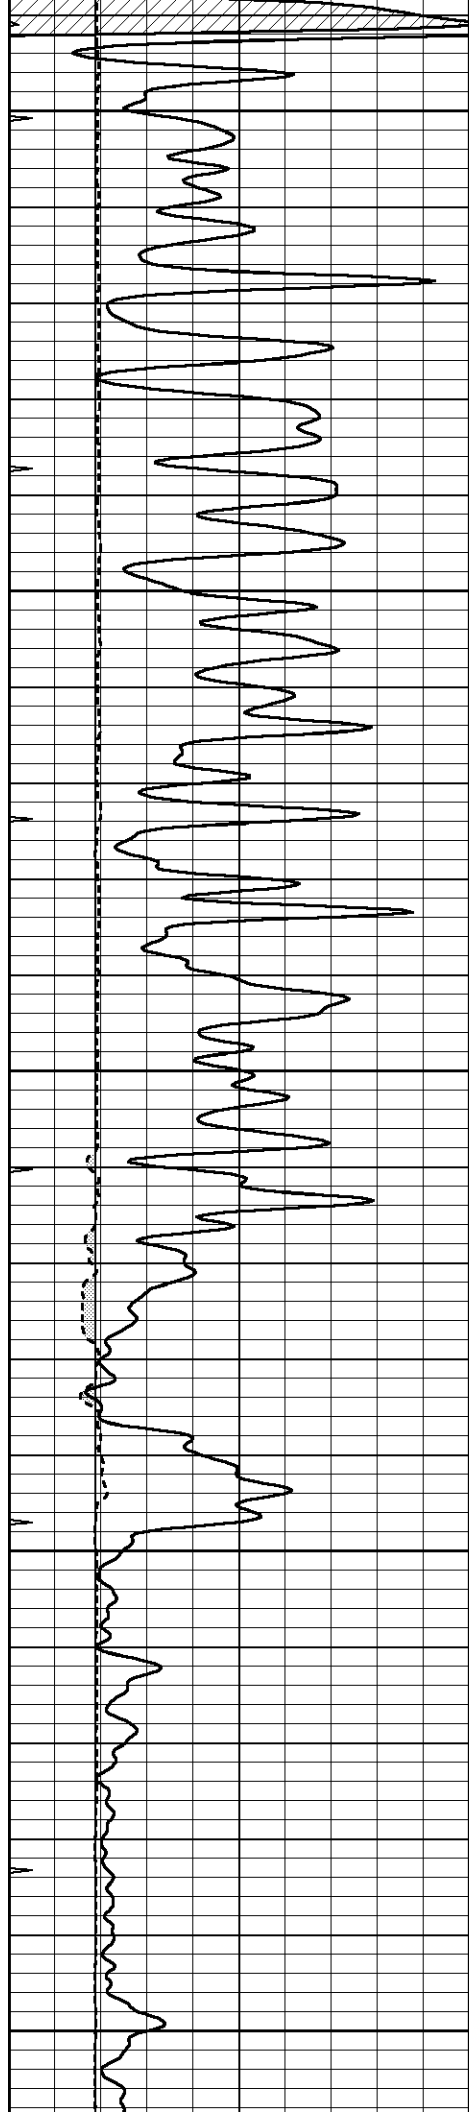


4650


4700

4750

4800

4850

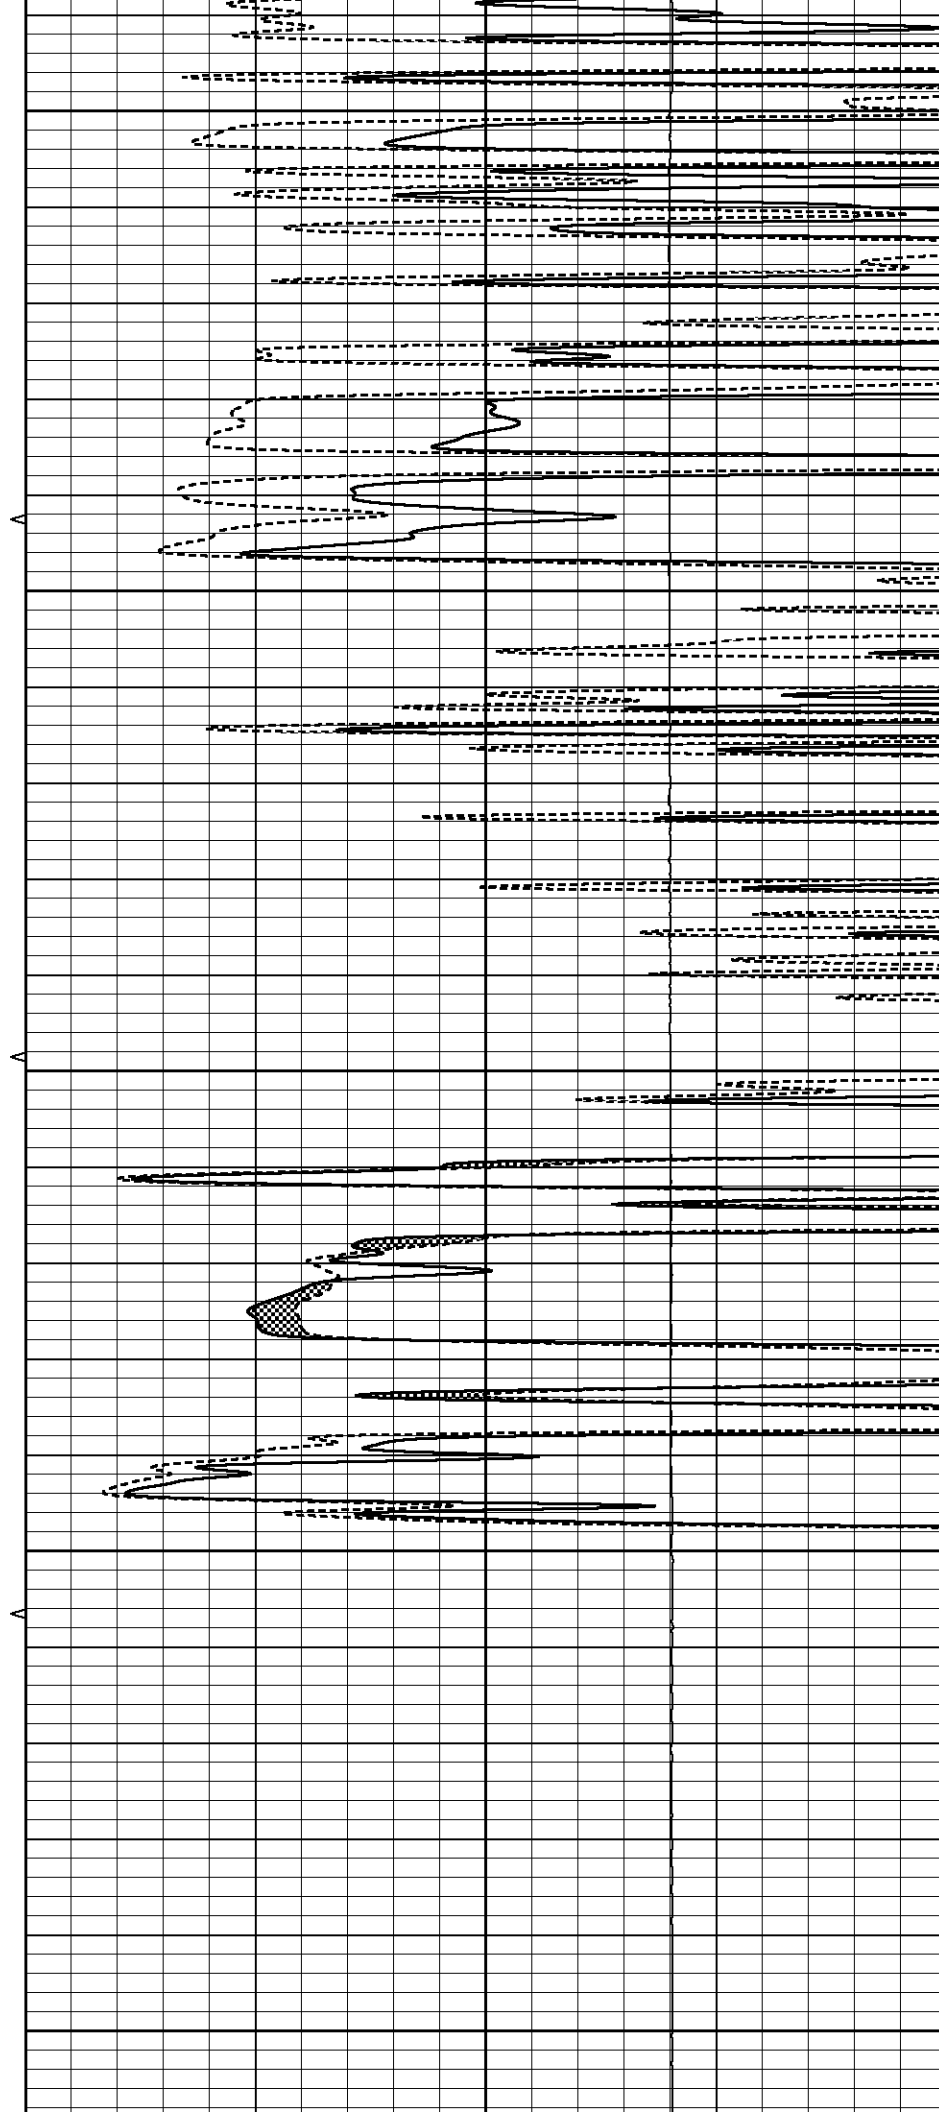


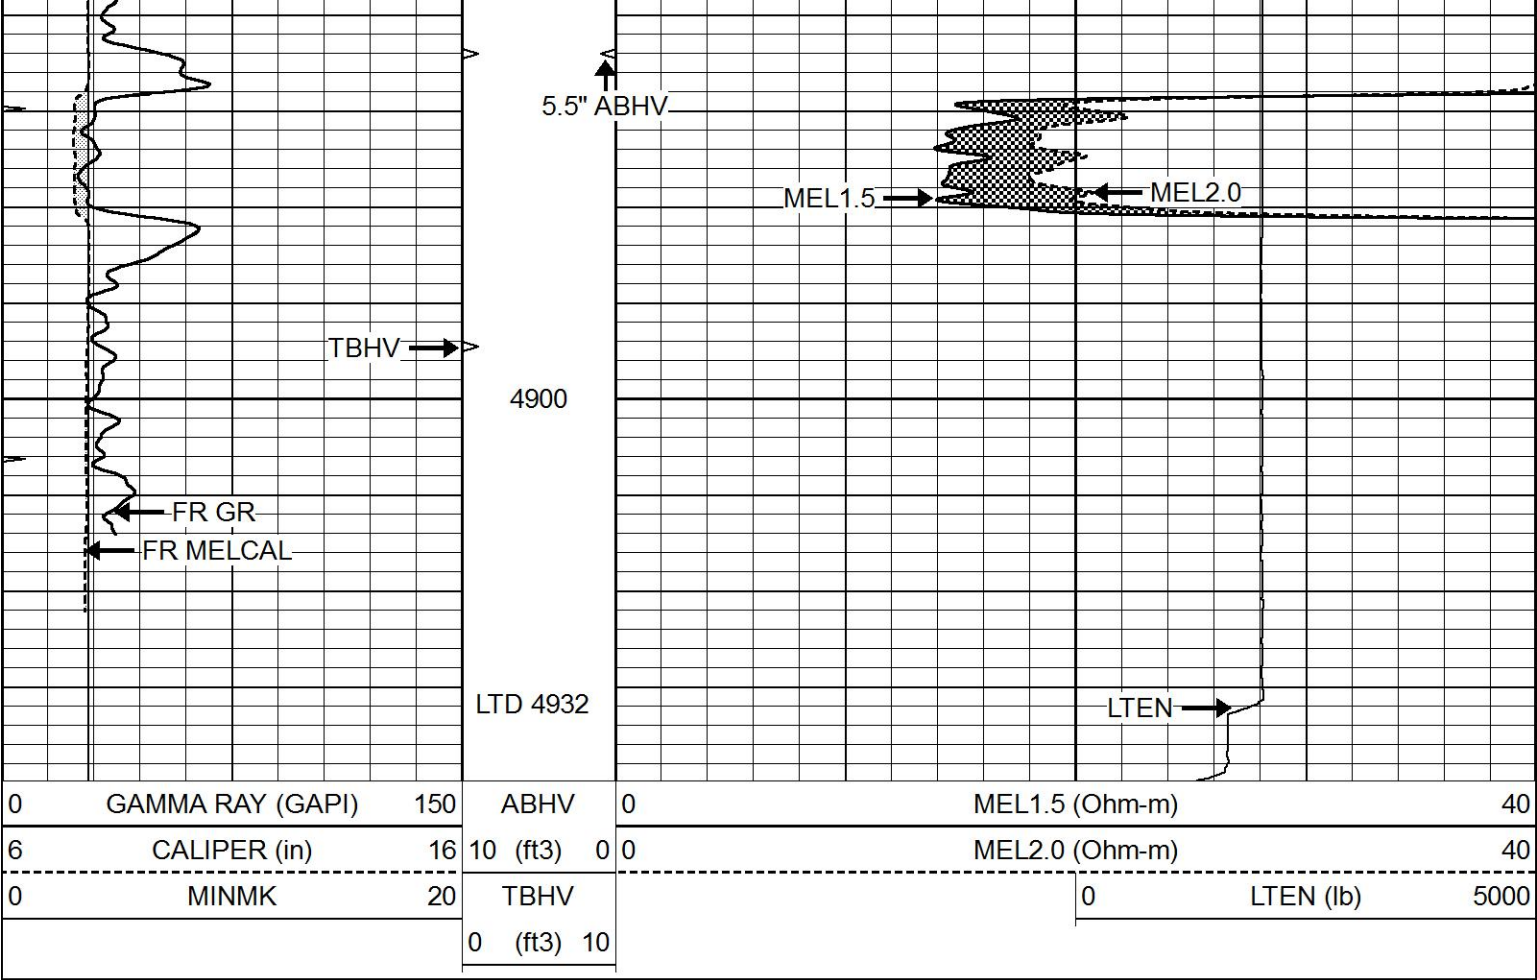


REPEAT SECTION

Database File	8412pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Sat Feb 17 01:59:16 2024
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV		0	LTEN (lb) 5000
			0 (ft3) 10			

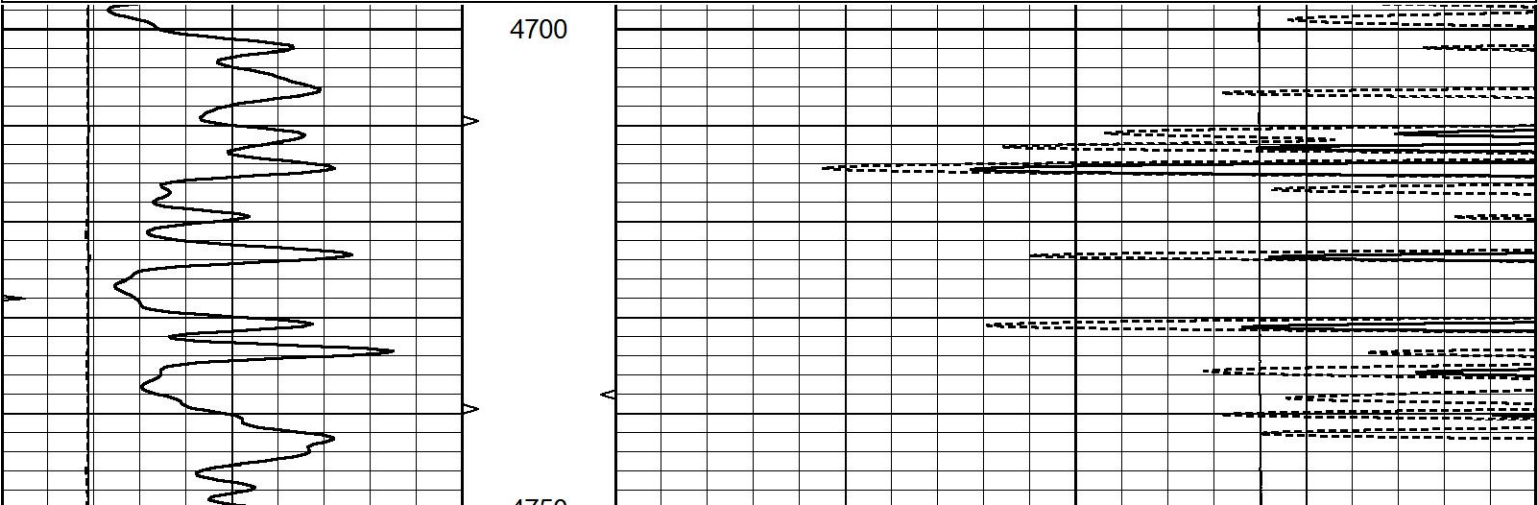

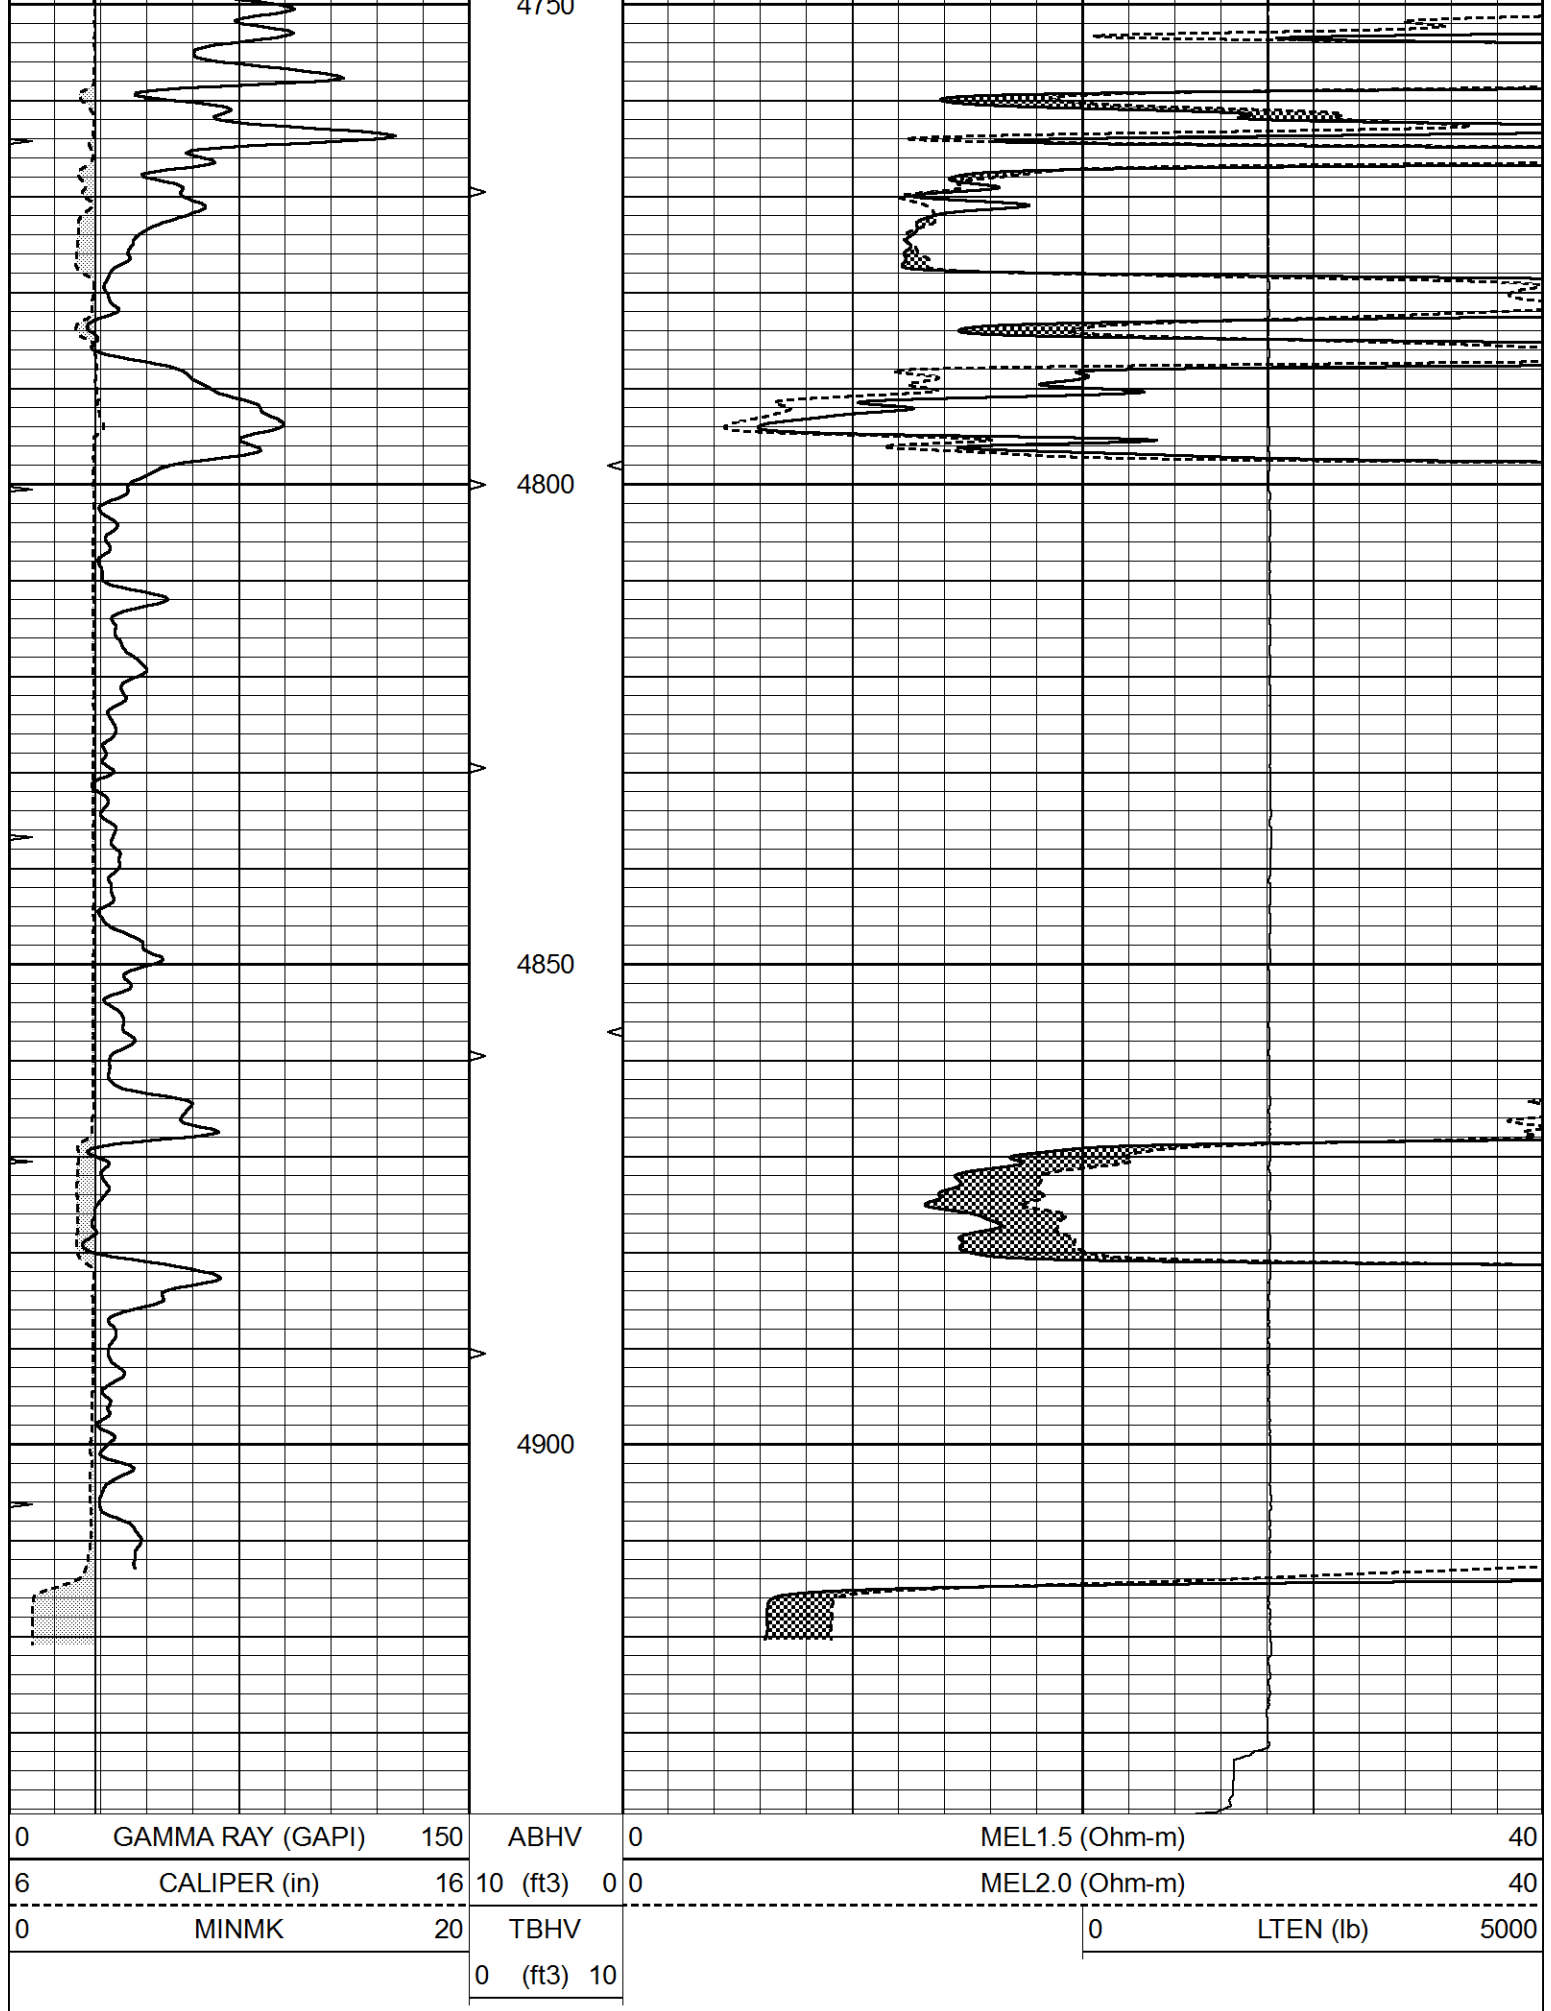

Database File 8412pe.db
Dataset Pathname pass7.5
Dataset Creation Sat Feb 17 03:27:54 2024

MICRO Calibration Report

Serial Number: 070910
Tool Model: ProbeN
Performed: Sat Feb 17 02:06:19 2024

Caliper Calibration: Gain=3.509 Offset=1.965

References Low Cal High Cal
8.000 16.000
Readings 1.720 4.000

1.5" Calibration: Gain=60.000 Offset=-2.000

References Low Cal High Cal
0.000 20.000
Readings 0.000 1.216

2" Calibration: Gain=62.000 Offset=-1.500

References Low Cal High Cal
0.000 20.000
Readings 0.002 1.053

Gamma Ray Calibration Report

Serial Number: 070559
Tool Model: OPEN_GR
Performed: Sun Jan 07 11:06:36 2024

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.3000 GAPI/cps